

| <b>TEST REPORT</b><br><b>ANSI/CAN/UL 9540A:2019</b><br><b>Test Method for Evaluating Thermal Runaway Fire Propagation</b><br><b>in Battery Energy Storage Systems</b>  |  |
|--|--|
| Report Reference No.....   | : 240102085GZU-001   |
| Tested by<br>(name + signature) .....  | Qifa Lai<br>Engineer<br><i>Qifa Lai</i>  |
| Approved by<br>(name + signature) .....  | Mira Xiao<br>Reviewer<br><i>Mira Xiao</i>  |
| Total number of pages.....   | : 56   |
| Date of issue.....   | : 12 June 2024   |
| Testing Laboratory.....  | : Intertek Testing Services Shenzhen Ltd. Zengcheng Branch   |
| Address.....   | : C2-1, Heping Xu, Yongning Street, Zengcheng District, Guangzhou, China   |
| Testing location/ procedure .....  | : Lab test   |
| Testing location/ address.....   | : Intertek Testing Services Shenzhen Ltd. Zengcheng Branch<br>C2-1, Heping Xu, Yongning Street, Zengcheng District, Guangzhou, China |
| Applicant's name .....   | : Energie Volthium Inc   |
| Address.....   | : 2600 Boulevard Ford #100, Chateauguay, Quebec J6J 4Z2, Canada  |
| Test specification:  |  |
| Standard .....   | : ANSI/CAN/UL 9540A:2019 (Fourth Edition) + UL CRD's   |
| Test procedure.....  | : Unit level test (clause 9.1-9.8)   |
| Non-standard test method.....  | : N/A  |
| Test Report Form No.....   | : ANSI/CAN/UL 9540A_Unit   |
| Test Report Form(s) Originator .....   | : Intertek   |
| Master TRF.....  | : 2022-01  |
| This publication may be reproduced in whole or in part for non-commercial purpose as long as Intertek is acknowledged as copyright owner and source of the material. Intertek takes no responsibility and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.  |  |
| Test item description .....  | : LiFePO <sub>4</sub> battery system   |
| Trade Mark .....   | :  (Volthium)                                     |
| Manufacturer.....  | :  |
| Model/Type reference.....  | : See Unit information for detail.   |
| Ratings.....   | : See Unit information for detail.   |
| <b>General disclaimer:</b>   |  |
| This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. |  |

**List of attachments:**

- Attachment 1 – Photos
  - Attachment 2 – Sample preparation
  - Attachment 3 – Arrangement of the unit
  - Attachment 4 – Thermal runaway preparation
  - Attachment 5 – Observations and records
  - Attachment 6 – Temperature measurements
  - Attachment 7 – Heat flux measurements
  - Attachment 8 – Chemical heat release rate measurement
  - Attachment 9 – Convective heat release rate measurement
  - Attachment 10 – Gas generation measurement
  - Attachment 11 – Smoke release rate measurement
  - Attachment 12 – Equipment list
- Test video 20240521-1.mp4 and 20240521-2.mp4 were provided in addition to this test report.

**Summary of testing:**

|  |  |
|--|--|
| Thermal Runaway Propagation.....                                   | : 1 cell vented and thermal runaway due to thermal runaway propagation in the initiating module.<br>No thermal runaway propagation from initiating module to other modules in initiating unit. |
| Maximum Target BESS Temperature (°C) .....                         | : 25.4°C   |
| Maximum Wall Surface Temperature (°C) .....                        | : 26.5°C   |
| Maximum Heat Flux on target wall surfaces (kW/m <sup>2</sup> ) ... | : N/A  |
| Maximum Heat Flux on target BESS units (kW/m <sup>2</sup> ) .....  | : N/A  |
| Peak Chemical Heat Release Rate (kW) .....                         | : 45.8kW   |
| Peak Convective Heat Release Rate (kW) .....                       | : 0kW  |
| Peak Smoke Heat Release Rate (m <sup>2</sup> /s) .....             | : 0.3175 m <sup>2</sup> /s   |
| Total Smoke Release (m <sup>2</sup> ) .....                        | : 355.58m <sup>2</sup>   |
| Maximum Heat Flux on Egress Path (kW/m <sup>2</sup> ) .....        | : 0.024kW/s <sup>2</sup>   |
| External Flaming from BESS .....                                   | : Not observed   |
| Flying debris or explosive discharge of gases .....                | : Not observed   |
| Sparks, electrical arcs, or other electrical events .....          | : Not observed   |
| Re-ignitions .....   | : Not observed   |

**Conclusion:**

The performance criteria of the unit level test as indicated in 9.8 of UL 9540A 4th edition has been met. Installation level testing in Section 10 is not required because the performance conditions outlined in Table 9.1 are met during the unit level test.

**Possible test case verdicts:**

- test case does not apply to the test object.....: N/A
- test object was not evaluated for the requirement.....: N/A
- test object does meet the requirement.....: Pass (P)
- test object does not meet the requirement .....: Fail (F)

**Testing:**

Date of receipt of test items .....: 19 May 2024  
Date(s) of performance of tests .....: 19 May 2024 – 21 May 2024

**General remarks:**

"(see Attachment #)" refers to additional information appended to the report.  
"(see appended table)" refers to a table appended to the report.  
The tests results presented in this report relate only to the object tested.  
This report shall not be reproduced except in full without the written approval of the testing laboratory.  
List of test equipment must be kept on file and available for review.  
Additional test data and/or information provided in the attachments to this report.  
Throughout this report a  comma /  **point** is used as the decimal separator.  
Determination of the test results includes consideration of measurement uncertainty from the test equipment and methods.

**General product information:**

This test unit is a residential indoor floor mounted battery system. It also can cover residential wall mounted battery system.  
By evaluating test model "51.2-100-R-3U-C-12, 51.2-100-R-H-3U-C-12", the test results can cover models "51.2-100-R-3U-C-13, 51.2-100-R-H-3U-C-13" and "51.2-100-R-3U-C-14, 51.2-100-R-H-3U-C-14" due to the thermal runaway will not spread from the initiating unit to the target unit.  
The battery module model 51.2-100-R-H-3U-C is identical to 51.2-100-R-3U-C, except that the internal heating sheets can be controlled by software.

# Test Verification of Conformity

Verification Number: 240102085GZU-VOC001

On the basis of the tests undertaken, the sample<s> of the below product have been found to comply with the requirements of the referenced specification<s>/standard<s> at the time the tests were carried out. This verification is part of the full test report<s> and should be read in conjunction with it <them>.

|  |  |
|--|--|
| <b>Applicant Name &amp; Address:</b>                   | Energie Volthium Inc<br>2600 Boulevard Ford #100, Chateauguay, Quebec J6J 4Z2, Canada  |
| <b>Product Description:</b>                            | LiFePO <sub>4</sub> battery system   |
| <b>Ratings &amp; Principle Characteristics:</b>        | See Appendix: Test Verification of Conformity  |
| <b>Models/Type References:</b>                         | See Appendix: Test Verification of Conformity  |
| <b>Brand Names:</b>                                    | Volthium (Volthium)  |
| <b>Specification&lt;s&gt;/Standards:</b>               | ANSI/CAN/UL 9540A:2019<br>Test Method for Evaluating Thermal Runaway Fire Propagation in Battery Energy Storage Systems<br>Unit level test (clause 9.1-9.8)                        |
| <b>Verification Issuing Office Name &amp; Address:</b> | Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.<br>Room 101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District, Guangzhou, Guangdong, China |
| <b>Date of Tests:</b>                                  | 19 May 2024 to 21 May 2024   |
| <b>Test Report Number(s):</b>                          | 240102085GZU-001   |

Additional information in Appendix.



Signature

**Name:** Jason Fu  
**Position:** Supervisor  
**Date:** 14 June 2024

This Verification is for the exclusive use of Intertek's client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Verification. Only the Client is authorized to permit copying or distribution of this Verification. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test/inspection results referenced in this Verification are relevant only to the sample tested/inspected. This Verification by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## APPENDIX: Test Verification of Conformity

This is an Appendix to Test Verification of Conformity Number: 240102085GZU-VOC001.

Ratings & Principle Characteristics:

|  |  |  |  |
|--|--|--|--|
| Model  | 51.2-100-R-3U-C-2, 51.2-100-R-H-3U-C-2 | 51.2-100-R-3U-C-3, 51.2-100-R-H-3U-C-3 | 51.2-100-R-3U-C-4, 51.2-100-R-H-3U-C-4 |
| Rated capacity (Ah):                         | 200                                    | 300                                    | 400                                    |
| Rated energy (kWh):                          | 10.24                                  | 15.36                                  | 20.48                                  |
| Nominal voltage (V):                         | 51.2                                   | 51.2                                   | 51.2                                   |
| Weight(kg):                                  | 2*(48±1)                               | 3*(48±1)                               | 4*(48±1)                               |
| Module series and/or parallel configuration: | 1S2P                                   | 1S3P                                   | 1S4P                                   |
| Model  | 51.2-100-R-3U-C-5, 51.2-100-R-H-3U-C-5 | 51.2-100-R-3U-C-6, 51.2-100-R-H-3U-C-6 | 51.2-100-R-3U-C-7, 51.2-100-R-H-3U-C-7 |
| Rated capacity (Ah):                         | 500                                    | 600                                    | 700                                    |
| Rated energy (kWh):                          | 25.6                                   | 30.72                                  | 35.84                                  |
| Nominal voltage (V):                         | 51.2                                   | 51.2                                   | 51.2                                   |
| Weight(kg):                                  | 5*(48±1)                               | 6*(48±1)                               | 7*(48±1)                               |
| Module series and/or parallel configuration: | 1S5P                                   | 1S6P                                   | 1S7P                                   |

*Jason Fu*

**Signature**

**Name: Jason Fu**  
**Position: Supervisor**  
**Date: 14 June 2024**

This Verification is for the exclusive use of Intertek's client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Verification. Only the Client is authorized to permit copying or distribution of this Verification. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test/inspection results referenced in this Verification are relevant only to the sample tested/inspected. This Verification by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## APPENDIX: Test Verification of Conformity

This is an Appendix to Test Verification of Conformity Number: 240102085GZU-VOC001.

Ratings & Principle Characteristics:

|  |  |  |  |
|--|--|--|--|
| Model  | 51.2-100-R-3U-C-8, 51.2-100-R-H-3U-C-8   | 51.2-100-R-3U-C-9, 51.2-100-R-H-3U-C-9   | 51.2-100-R-3U-C-10, 51.2-100-R-H-3U-C-10 |
| Rated capacity (Ah):                         | 800                                      | 900                                      | 1000                                     |
| Rated energy (kWh):                          | 40.96                                    | 46.08                                    | 51.2                                     |
| Nominal voltage (V):                         | 51.2                                     | 51.2                                     | 51.2                                     |
| Weight(kg):                                  | 8*(48±1)                                 | 9*(48±1)                                 | 10*(48±1)                                |
| Module series and/or parallel configuration: | 1S8P                                     | 1S9P                                     | 1S10P                                    |
| Model  | 51.2-100-R-3U-C-11, 51.2-100-R-H-3U-C-11 | 51.2-100-R-3U-C-12, 51.2-100-R-H-3U-C-12 | 51.2-100-R-3U-C-13, 51.2-100-R-H-3U-C-13 |
| Rated capacity (Ah):                         | 1100                                     | 1200                                     | 1300                                     |
| Rated energy (kWh):                          | 56.32                                    | 61.44                                    | 66.56                                    |
| Nominal voltage (V):                         | 51.2Vdc                                  | 51.2Vdc                                  | 51.2Vdc                                  |
| Weight(kg):                                  | 11*(48±1)                                | 12*(48±1)                                | 13*(48±1)                                |
| Module series and/or parallel configuration: | 1S11P                                    | 1S12P                                    | 1S13P                                    |

*Jason Fu*

**Signature**

**Name: Jason Fu**  
**Position: Supervisor**  
**Date: 14 June 2024**


This Verification is for the exclusive use of Intertek's client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Verification. Only the Client is authorized to permit copying or distribution of this Verification. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test/inspection results referenced in this Verification are relevant only to the sample tested/inspected. This Verification by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## APPENDIX: Test Verification of Conformity

This is an Appendix to Test Verification of Conformity Number: 240102085GZU-VOC001.

Ratings & Principle Characteristics:

|   |  |
|---|--|
| Model   | 51.2-100-R-3U-C-14, 51.2-100-R-H-3U-C-14 |
| Rated capacity (Ah):  | 1400                                     |
| Rated energy (kWh):   | 71.68                                    |
| Nominal voltage (V):  | 51.2                                     |
| Weight(kg):   | 14*(48±1)                                |
| Module series and/or parallel configuration:                | 1S14P                                    |
| <b>Standard charge method:</b>                              |  |
| Charge current (A):   | 50A*                                     |
| End of charge voltage (V):                                  | 56V                                      |
| <b>Standard discharge method:</b>                           |  |
| Discharge current (A):                                      | 50A*                                     |
| End of discharge voltage (V):                               | 44.8V                                    |
| Rest time between charge and discharge                      | 30min                                    |
| (*) represent one module's end of charge/discharge current. |  |



**Signature**

**Name: Jason Fu**  
**Position: Supervisor**  
**Date: 14 June 2024**

This Verification is for the exclusive use of Intertek's client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Verification. Only the Client is authorized to permit copying or distribution of this Verification. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test/inspection results referenced in this Verification are relevant only to the sample tested/inspected. This Verification by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

# CERTIFICATE OF COMPLIANCE

This certificate confirms the model(s) for the product listed are in compliance and authorized to bear the Certification Mark(s) shown below when made in accordance with the conditions set forth in the Certification Agreement and Listing Report.

## Energie Volthium Inc

**Address:** 2600 Boulevard Ford #100,  
Chateauguay, Quebec J6J 4Z2

**Country:** Canada

**Report Issuing Office:** Intertek Testing Services Shenzhen Limited Guangzhou Branch

**Control Number:** 5025601

**Authorized by:**



for L. Matthew Snyder, Certification Manager

### VALID LISTING MARKS



This Certificate of Compliance is for the exclusive use of Intertek's Client and is provided pursuant to the Certification Agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the Agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the Agreement, for any loss, expense or damage occasioned by the use of this Certificate. Only the Client is authorized to permit copying or distribution of this Certificate and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the Agreement and in this Certificate. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the Agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

Intertek Testing Services NA Inc.  
545 East Algonquin Road, Arlington Heights, IL 60005  
Telephone 800-345-3851 or 847-439-5667

|                     |  |
|---------------------|--|
| <b>Standard(s):</b> | Batteries for Use in Stationary and Motive Auxiliary Power Applications [ANSI/CAN/UL 1973:2022 Ed.3] |
| <b>Product:</b>     | LiFePO4 Battery  |
| <b>Brand Name:</b>  | VOLTHIUM   |
| <b>Models:</b>      | 51.2-100-R-3U-C, 51.2-100-R-H-3U-C   |

This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

**Applicant:** Energie Volthium Inc

**Address:** 2600 Boulevard Ford #100,  
Chateauguay, Quebec J6J 4Z2

**Country:** Canada

**Party Authorized To Apply Mark:** Same as Manufacturer  
**Report Issuing Office:** Intertek Testing Services Shenzhen Limited Guangzhou Branch

**Control Number:** 5029806

**Authorized by:**   
for L. Matthew Snyder, Certification Manager



This document supersedes all previous Authorizations to Mark for the noted Report Number.

This Authorization to Mark is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Authorization to Mark. Only the Client is authorized to permit copying or distribution of this Authorization to Mark and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the agreement and in this Authorization to Mark. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

Intertek Testing Services NA Inc.  
545 East Algonquin Road, Arlington Heights, IL 60005  
Telephone 800-345-3851 or 847-439-5667 Fax 312-283-1672

|   |
|---|
| <b>Standard(s):</b> Energy Storage Systems and Equipment [ANSI/CAN/UL 9540:2023 Ed.3] |
| <b>Product:</b> Energy Storge Systems   |
| <b>Brand Name:</b> Volthium   |

**Models:**

51.2-100V2-SOL 15K1, 51.2-100V3-SOL 15K1, 51.2-100V4-SOL 15K1,  
51.2-100V5-SOL 15K1, 51.2-100V6-SOL 15K1, 51.2-100V7-SOL 15K1,  
51.2-100V8-SOL 15K1, 51.2-100V9-SOL 15K1, 51.2-100V10-SOL 15K1,  
51.2-100V11-SOL 15K1, 51.2-100V12-SOL 15K1, 51.2-100V13-SOL 15K1,  
51.2-100V14-SOL 15K1, 51.2-100V4-SOL 15K2, 51.2-100V5-SOL 15K2,  
51.2-100V6-SOL 15K2, 51.2-100V7-SOL 15K2, 51.2-100V8-SOL 15K2,  
51.2-100V9-SOL 15K2, 51.2-100V10-SOL 15K2, 51.2-100V11-SOL 15K2,  
51.2-100V12-SOL 15K2, 51.2-100V13-SOL 15K2, 51.2-100V14-SOL 15K2,  
51.2-100V15-SOL 15K2, 51.2-100V16-SOL 15K2, 51.2-100V17-SOL 15K2,  
51.2-100V18-SOL 15K2, 51.2-100V19-SOL 15K2, 51.2-100V20-SOL 15K2,  
51.2-100V21-SOL 15K2, 51.2-100V22-SOL 15K2, 51.2-100V23-SOL 15K2,  
51.2-100V24-SOL 15K2, 51.2-100V25-SOL 15K2, 51.2-100V26-SOL 15K2,  
51.2-100V27-SOL 15K2, 51.2-100V28-SOL 15K2, 51.2-100V2-SOL 12K1,  
51.2-100V3-SOL 12K1, 51.2-100V4-SOL 12K1, 51.2-100V5-SOL 12K1,  
51.2-100V6-SOL 12K1, 51.2-100V7-SOL 12K1, 51.2-100V8-SOL 12K1,  
51.2-100V9-SOL 12K1, 51.2-100V10-SOL 12K1, 51.2-100V11-SOL 12K1,  
51.2-100V12-SOL 12K1, 51.2-100V13-SOL 12K1, 51.2-100V14-SOL 12K1,  
51.2-100V4-SOL 12K2, 51.2-100V5-SOL 12K2, 51.2-100V6-SOL 12K2,  
51.2-100V7-SOL 12K2, 51.2-100V8-SOL 12K2, 51.2-100V9-SOL 12K2,  
51.2-100V10-SOL 12K2, 51.2-100V11-SOL 12K2, 51.2-100V12-SOL 12K2,  
51.2-100V13-SOL 12K2, 51.2-100V14-SOL 12K2, 51.2-100V15-SOL 12K2,  
51.2-100V16-SOL 12K2, 51.2-100V17-SOL 12K2, 51.2-100V18-SOL 12K2,  
51.2-100V19-SOL 12K2, 51.2-100V20-SOL 12K2, 51.2-100V21-SOL 12K2,  
51.2-100V22-SOL 12K2, 51.2-100V23-SOL 12K2, 51.2-100V24-SOL 12K2,  
51.2-100V25-SOL 12K2, 51.2-100V26-SOL 12K2, 51.2-100V27-SOL 12K2,  
51.2-100V28-SOL 12K2, 51.2-100V2-SOL 9K1, 51.2-100V3-SOL 9K1,  
51.2-100V4-SOL 9K1, 51.2-100V5-SOL 9K1, 51.2-100V6-SOL 9K1,  
51.2-100V7-SOL 9K1, 51.2-100V8-SOL 9K1, 51.2-100V9-SOL 9K1,  
51.2-100V10-SOL 9K1, 51.2-100V11-SOL 9K1, 51.2-100V12-SOL 9K1,  
51.2-100V13-SOL 9K1, 51.2-100V14-SOL 9K1, 51.2-100V4-SOL 9K2,  
51.2-100V5-SOL 9K2, 51.2-100V6-SOL 9K2, 51.2-100V7-SOL 9K2,  
51.2-100V8-SOL 9K2, 51.2-100V9-SOL 9K2, 51.2-100V10-SOL 9K2,  
51.2-100V11-SOL 9K2, 51.2-100V12-SOL 9K2, 51.2-100V13-SOL 9K2,  
51.2-100V14-SOL 9K2, 51.2-100V15-SOL 9K2, 51.2-100V16-SOL 9K2,  
51.2-100V17-SOL 9K2, 51.2-100V18-SOL 9K2, 51.2-100V19-SOL 9K2,  
51.2-100V20-SOL 9K2, 51.2-100V21-SOL 9K2, 51.2-100V22-SOL 9K2,  
51.2-100V23-SOL 9K2, 51.2-100V24-SOL 9K2, 51.2-100V25-SOL 9K2,  
51.2-100V26-SOL 9K2, 51.2-100V27-SOL 9K2, 51.2-100V28-SOL 9K2,  
51.2-100V2-SOL 8K1, 51.2-100V3-SOL 8K1, 51.2-100V4-SOL 8K1,  
51.2-100V5-SOL 8K1, 51.2-100V6-SOL 8K1, 51.2-100V7-SOL 8K1,  
51.2-100V8-SOL 8K1, 51.2-100V9-SOL 8K1, 51.2-100V10-SOL 8K1,  
51.2-100V11-SOL 8K1, 51.2-100V12-SOL 8K1, 51.2-100V13-SOL 8K1,  
51.2-100V14-SOL 8K1, 51.2-100V4-SOL 8K2, 51.2-100V5-SOL 8K2,  
51.2-100V6-SOL 8K2, 51.2-100V7-SOL 8K2, 51.2-100V8-SOL 8K2,  
51.2-100V9-SOL 8K2, 51.2-100V10-SOL 8K2, 51.2-100V11-SOL 8K2,  
51.2-100V12-SOL 8K2, 51.2-100V13-SOL 8K2, 51.2-100V14-SOL 8K2,  
51.2-100V15-SOL 8K2, 51.2-100V16-SOL 8K2, 51.2-100V17-SOL 8K2,  
51.2-100V18-SOL 8K2, 51.2-100V19-SOL 8K2, 51.2-100V20-SOL 8K2,  
51.2-100V21-SOL 8K2, 51.2-100V22-SOL 8K2, 51.2-100V23-SOL 8K2,  
51.2-100V24-SOL 8K2, 51.2-100V25-SOL 8K2, 51.2-100V26-SOL 8K2,  
51.2-100V27-SOL 8K2, 51.2-100V28-SOL 8K2


| 1.0 Reference and Address |   |                              |               |
|---------------------------|---|------------------------------|---------------|
| Report Number             | 240229127GZU-003  | Original Issued: 12-Aug-2024 | Revised: None |
| Standard(s)               | Energy Storage Systems and Equipment [ANSI/CAN/UL 9540:2023 Ed.3] |                              |               |
| Applicant                 | Energie Volthium Inc  | Manufacturer                 |               |
| Address                   | 2600 Boulevard Ford #100,<br>Chateauguay, Quebec J6J 4Z2          | Address                      |               |
| Country                   | Canada  | Country                      |               |
| Contact                   | Yanni Samson  | Contact                      |               |
| Phone                     | 514-989-9586  | Phone                        |               |
| FAX                       | --  | FAX                          | --            |
| Email                     | yanni.samson@volthium.com   | Email                        |               |

| 2.0 Product Description |   |
|-------------------------|---|
| Product                 | Energy Storage Systems  |
| Brand name              |    |
| Description             | The product covered by this report are intelligent energy storage systems. It includes grid support hybrid inverters and a lithium battery systems (LiFePO4). Installation should be located where specified in installation manual as well as in accordance with the National Electrical Code (NEC) and the Canadian Electrical Code (CEC).  |
| Models                  | 51.2-100V2-SOL 15K1, 51.2-100V3-SOL 15K1, 51.2-100V4-SOL 15K1, 51.2-100V5-SOL 15K1, 51.2-100V6-SOL 15K1, 51.2-100V7-SOL 15K1, 51.2-100V8-SOL 15K1, 51.2-100V9-SOL 15K1, 51.2-100V10-SOL 15K1, 51.2-100V11-SOL 15K1, 51.2-100V12-SOL 15K1, 51.2-100V13-SOL 15K1, 51.2-100V14-SOL 15K1, 51.2-100V4-SOL 15K2, 51.2-100V5-SOL 15K2, 51.2-100V6-SOL 15K2, 51.2-100V7-SOL 15K2, 51.2-100V8-SOL 15K2, 51.2-100V9-SOL 15K2, 51.2-100V10-SOL 15K2, 51.2-100V11-SOL 15K2, 51.2-100V12-SOL 15K2, 51.2-100V13-SOL 15K2, 51.2-100V14-SOL 15K2, 51.2-100V15-SOL 15K2, 51.2-100V16-SOL 15K2, 51.2-100V17-SOL 15K2, 51.2-100V18-SOL 15K2, 51.2-100V19-SOL 15K2, 51.2-100V20-SOL 15K2, 51.2-100V21-SOL 15K2, 51.2-100V22-SOL 15K2, 51.2-100V23-SOL 15K2, 51.2-100V24-SOL 15K2, 51.2-100V25-SOL 15K2, 51.2-100V26-SOL 15K2, 51.2-100V27-SOL 15K2, 51.2-100V28-SOL 15K2, 51.2-100V2-SOL 12K1, 51.2-100V3-SOL 12K1, 51.2-100V4-SOL 12K1, 51.2-100V5-SOL 12K1, 51.2-100V6-SOL 12K1, 51.2-100V7-SOL 12K1, 51.2-100V8-SOL 12K1, 51.2-100V9-SOL 12K1, 51.2-100V10-SOL 12K1, 51.2-100V11-SOL 12K1, 51.2-100V12-SOL 12K1, 51.2-100V13-SOL 12K1, 51.2-100V14-SOL 12K1, 51.2-100V4-SOL 12K2, 51.2-100V5-SOL 12K2, 51.2-100V6-SOL 12K2, 51.2-100V7-SOL 12K2, 51.2-100V8-SOL 12K2, 51.2-100V9-SOL 12K2, 51.2-100V10-SOL 12K2, 51.2-100V11-SOL 12K2, 51.2-100V12-SOL 12K2, 51.2-100V13-SOL 12K2, 51.2-100V14-SOL 12K2, 51.2-100V15-SOL 12K2, 51.2-100V16-SOL 12K2, 51.2-100V17-SOL 12K2, 51.2-100V18-SOL 12K2, 51.2-100V19-SOL 12K2, 51.2-100V20-SOL 12K2, 51.2-100V21-SOL 12K2, 51.2-100V22-SOL 12K2, 51.2-100V23-SOL 12K2, 51.2-100V24-SOL 12K2, 51.2-100V25-SOL 12K2, 51.2-100V26-SOL 12K2, 51.2-100V27-SOL 12K2, 51.2-100V28-SOL 12K2, 51.2-100V2-SOL 9K1, 51.2-100V3-SOL 9K1, 51.2-100V4-SOL 9K1, 51.2-100V5-SOL 9K1, 51.2-100V6-SOL 9K1, 51.2-100V7-SOL 9K1, 51.2-100V8-SOL 9K1, 51.2-100V9-SOL 9K1, 51.2-100V10-SOL 9K1, 51.2-100V11-SOL 9K1, 51.2-100V12-SOL 9K1, 51.2-100V13-SOL 9K1, 51.2-100V14-SOL 9K1, 51.2-100V4-SOL 9K2, 51.2-100V5-SOL 9K2, 51.2-100V6-SOL 9K2, 51.2-100V7-SOL 9K2, 51.2-100V8-SOL 9K2, 51.2-100V9-SOL 9K2, 51.2-100V10-SOL 9K2, 51.2-100V11-SOL 9K2, 51.2-100V12-SOL 9K2, 51.2-100V13-SOL 9K2, 51.2-100V14-SOL 9K2, 51.2-100V15-SOL 9K2, 51.2-100V16-SOL 9K2, 51.2-100V17-SOL 9K2, 51.2-100V18-SOL 9K2, 51.2-100V19-SOL 9K2, 51.2-100V20-SOL 9K2, 51.2-100V21-SOL 9K2, 51.2-100V22-SOL 9K2, 51.2-100V23-SOL 9K2, 51.2-100V24-SOL 9K2, 51.2-100V25-SOL 9K2, 51.2-100V26-SOL 9K2, 51.2-100V27-SOL 9K2, 51.2-100V28-SOL 9K2, 51.2-100V2-SOL 8K1, 51.2-100V3-SOL 8K1, 51.2-100V4-SOL 8K1, 51.2-100V5-SOL 8K1, 51.2-100V6-SOL 8K1, 51.2-100V7-SOL 8K1, 51.2-100V8-SOL 8K1, 51.2-100V9-SOL 8K1, 51.2-100V10-SOL 8K1, 51.2-100V11-SOL 8K1, 51.2-100V12-SOL 8K1, 51.2-100V13-SOL 8K1, 51.2-100V14-SOL 8K1, 51.2-100V4-SOL 8K2, 51.2-100V5-SOL 8K2, 51.2-100V6-SOL 8K2, 51.2-100V7-SOL 8K2, 51.2-100V8-SOL 8K2, 51.2-100V9-SOL 8K2, 51.2-100V10-SOL 8K2, 51.2-100V11-SOL 8K2, 51.2-100V12-SOL 8K2, 51.2-100V13-SOL 8K2, 51.2-100V14-SOL 8K2, 51.2-100V15-SOL 8K2, 51.2-100V16-SOL 8K2, 51.2-100V17-SOL 8K2, 51.2-100V18-SOL 8K2, 51.2-100V19-SOL 8K2, 51.2-100V20-SOL 8K2, |

| <b>2.0 Product Description</b> |  |
|--------------------------------|--|
|                                | 51.2-100V21–SOL 8K2, 51.2-100V22–SOL 8K2, 51.2-100V23–SOL 8K2,<br>51.2-100V24–SOL 8K2, 51.2-100V25–SOL 8K2, 51.2-100V26–SOL 8K2,<br>51.2-100V27–SOL 8K2, 51.2-100V28–SOL 8K2   |
| Model Similarity               | <p>All models are identical only except the incorporating hybrid inverter and the number of battery moduels.</p> <p>About series model 51.2-100Vx-SOL xKx or 51.2-100Vxx-SOL xxKx</p> <p>The suffix "51.2-100" denotes the battery moduel.</p> <p>The suffix "Vx" denotes the number of battery moduels. x represents digit 2 to 28.</p> <p>The suffix "SOL xK" denotes the maximum output power of inverter, x represents 15K, 12K, 9K, 8K. 15K represents output power is 15kW. 12K represents output power is 12kW. 9K represents output power is 9kW. 8K represents output power is 8kW.</p> <p>The last suffix "x" denotes the number of inverter. It can be 1 or 2.</p> <p>The battery module model 51.2-100-R-H-3U-C is identical to 51.2-100-R-3U-C, except that model 51.2-100-R-H-3U-C of the internal heating sheets can be controlled by software.</p> |
| Ratings                        | Please refer to section 7.0, Illustration 4, 4a to 4bq for details.  |
| Other Ratings                  | Please refer to section 7.0, Illustration 4, 4a to 4bq for details.  |

**3.0 Product Photographs**

**Photo 1 - Overall view of the battery system**

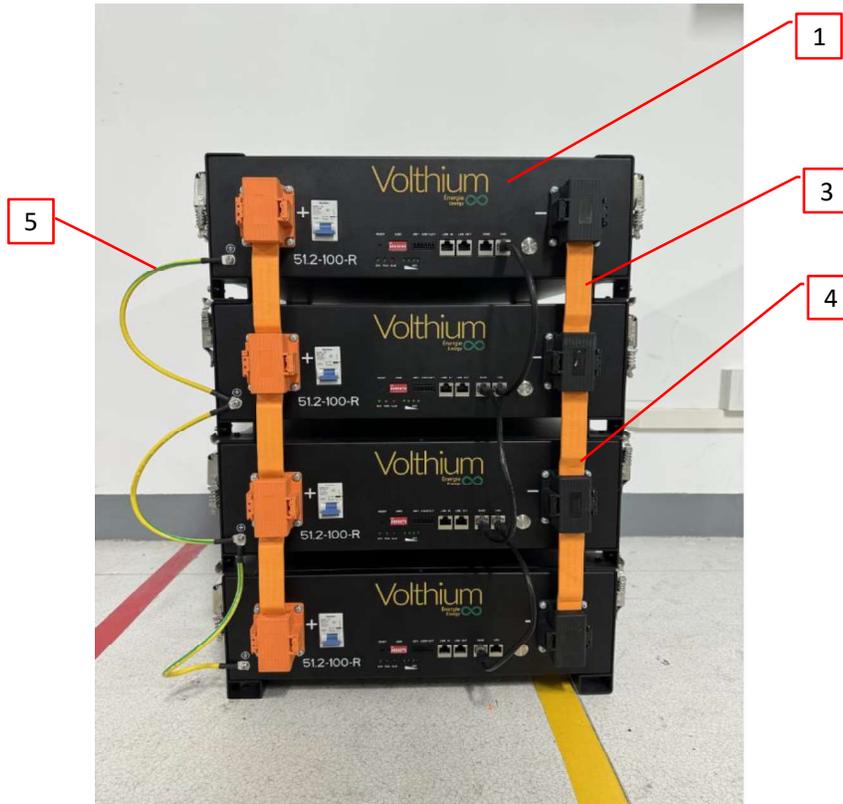

**Photo 2 - Overall view of the inverter**



| 4.0 Critical Components |                       |                             |                                      |                           |  |                                    |
|-------------------------|-----------------------|-----------------------------|--------------------------------------|---------------------------|--|------------------------------------|
| Photo #                 | Item no. <sup>1</sup> | Name                        | Manufacturer/ trademark <sup>2</sup> | Type / model <sup>2</sup> | Technical data and securement means  | Mark(s) of conformity <sup>3</sup> |
| 1                       | 1                     | Lithium iron battery system | Energie Volthium Inc                 | 51.2-100-R-3U-C           | Type of battery: LiFePO4<br>Normal Voltage: 51.2Vdc<br>Max. continue charging current: 70A<br>Max. continue discharging current: 100A<br>Rated capacity: 100Ah<br>Rated energy: 5.12kWh<br>May be used with 2 to 28 battery modules for a system | cETLus                             |
|                         |                       |                             |                                      | 51.2-100-R-H-3U-C         | Type of battery: LiFePO4<br>Normal Voltage: 51.2Vdc<br>Max. continue charging current: 70A<br>Max. continue discharging current: 100A<br>Rated capacity: 100Ah<br>Rated energy: 5.12kWh<br>May be used with 2 to 28 battery modules for a system | cETLus                             |
| 2                       | 2                     | Inverter                    | Portable Solar LLC                   | Limitless 8K-LV           | PV input: 175-425V(500Vmax), 26+26A, 44+44A;<br>Battery side: 43-63V, 180Amax<br>AC grid side: 120Vac/240Vac; 120Vac/208Vac, Split phase, 60Hz, 8kW, 33.3A, -0.9~+0.9  | cSGSus                             |
|                         |                       |                             |                                      | Limitless 9K-LV           | PV input: 175-425V(500Vmax), 26+26A, 44+44A;<br>Battery side: 43-63V, 180Amax<br>AC grid side: 120Vac/240Vac; 120Vac/208Vac, Split phase, 60Hz, 9kW, 37.5A, -0.9~+0.9  | cSGSus                             |
|                         |                       |                             |                                      | Limitless 12K-LV          | PV input: 175-425V(500Vmax), 26+26A, 44+44A;<br>Battery side: 43-63V, 275Amax<br>AC grid side: 120Vac/240Vac; 120Vac/208Vac, Split phase, 60Hz, 12kW, 50A, -0.9~+0.9   | cSGSus                             |
|                         |                       |                             |                                      | Limitless 15K-LV          | PV input: 175-425V(500Vmax), 26+26+26A, 44+44+44A;<br>Battery side: 43-63V, 275Amax<br>AC grid side: 120Vac/240Vac; 120Vac/208Vac, Split phase, 60Hz, 15kW, 62.5A, -0.9~+0.9   | cSGSus                             |

| 4.0 Critical Components |                       |   |  |                           |  |                                    |
|-------------------------|-----------------------|---|--|---------------------------|--|------------------------------------|
| Photo #                 | Item no. <sup>1</sup> | Name  | Manufacturer/ trademark <sup>2</sup>             | Type / model <sup>2</sup> | Technical data and securement means                                | Mark(s) of conformity <sup>3</sup> |
| 1                       | 3                     | Copper bar  | Dongguan Zhongzhi Electronics Technology Co.,Ltd | 528*25*4                  | COOPER, length: 528mm, width: 25mm, thickness: 4mm, pressed nickel | NR                                 |
|                         |                       |   | Various  | Various                   | COOPER, length: 528mm, width: 25mm, thickness: 4mm, pressed nickel | NR                                 |
|                         |                       |   | Dongguan Zhongzhi Electronics Technology Co.,Ltd | 200*25*4                  | COOPER, length: 200mm, width: 25mm, thickness: 4mm, pressed nickel | NR                                 |
|                         |                       |   | Various  | Various                   | COOPER, length: 200mm, width: 25mm, thickness: 4mm, pressed nickel | NR                                 |
| 1                       | 4                     | Tube  | PENGYUAN ELECTRONICS MATERIAL CO LTD             | RDHF                      | 600V, 125°C, thickness: 1-2mm                                      | cURus                              |
|                         |                       |   | Various  | Various                   | 600V, 125°C, thickness: 1-2mm                                      | cURus                              |
| 1                       | 5                     | Ground wire   | DONGGUAN ZHONGZHEN NEW ENERGY TECHNOLOGY CO.,LTD | 3512                      | 600V, 200°C, 10 AWG  | cURus                              |
|                         |                       |   | Various  | 3512                      | 600V, 200°C, 10 AWG  | cURus                              |
| 1                       | 6                     | Connecting wire for battery system and inverter (not shown) | SHENZHEN MYSUN INSULATION MATERIALS CO LTD       | 3512                      | 600V, 200°C, 2/0 AWG   | cURus                              |
|                         |                       |   | Various  | 3512                      | 600V, 200°C, 2/0 AWG   | cURus                              |
| 1                       | 7                     | Label (not shown)   | Various  | Various                   | Adhesive-Type, Min. 80°C   | UR                                 |

NOTES:

- 1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.
- 2) "Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.
- 3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates Unlisted and only visual examination is necessary. "See 5.0" indicates Unlisted components or assemblies to be evaluated periodically refer to section 5.0 for details.

## **5.0 Critical Unlisted CEC Components**

No Unlisted CEC components are used in this report.

## 6.0 Critical Features

Recognized Component - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

Listed Component - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

Unlisted Component - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

Critical Features/Components - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the product standard.

Construction Details - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.

1. Mechanical Assembly - Components such as switches, fuseholders, connectors, wiring terminals and display lamps are mounted and prevented from shifting or rotating by the use of lockwashers, starwashers, or other mounting format that prevents turning of the component.
2. Corrosion Protection - All ferrous metal parts are protected against corrosion by painting, plating or the equivalent.
3. Accessibility of Live Parts - All uninsulated live parts in primary circuitry are housed within a metal and non-metallic enclosure constructed with no openings other than those specifically described in Sections 4 and 5.
4. Grounding - All exposed dead-metal parts and all dead-metal parts within the enclosure that are exposed are connected to the grounding lead of the power supply cord or the equipment grounding terminal.
5. Polarized Connection - This product is provided with a polarized power supply connection. All single pole switches and fuses are connected only to the ungrounded supply circuit conductor.
6. Internal Wiring - Internal wiring is routed away from sharp or moving parts. Internal wiring leads terminating in soldered connections are made mechanically secure prior to soldering. Recognized Component separable (quick disconnect) connectors of the positive detent type, closed loop connectors, or other types specifically described in the text of this report are also acceptable as internal wiring terminals. At points where internal wiring passes through metal walls or partitions, the wiring insulation is protected against abrasion or damage by plastic bushings or grommets.
7. Schematics - Refer to Illustration 2 for schematics requiring verification during Field Representative Inspection Audits.
8. Markings - The product is marked as follows: Applicant's brand name, model number, date of manufacturer, electrical ratings.
9. Cautionary Markings - refer to Illustration 1 for details.
10. Installation, Operating and Safety Instructions - Instructions for installation and use of this product are provided by the manufacturer. Refer to Illustrations 3, 3a to 3k for details.

## 7.0 Illustrations

### Illustration 1 - Caution and warning labels



## WARNING / AVERTISSEMENT / ADVERTENCIA

Electric shock hazard.

Do not disassemble.

Do not hit or crush.

Do not connect in reverse  
or short circuit.

Do not expose to excessive heat.

To Reduce the Risk of Injury,  
read all instructions.

Risque d'électrocution.

chaleur excessive.

Ne pas démonter.

Ne pas heurter ni écraser.

Ne branchez pas en marche

arrière ou en court-circuit.

Ne pas exposer à une chaleur excessive.

Pour prévenir les blessures,  
lire toutes les instructions.

Riesgo de shock eléctrico.

No desarmar.

No golpee ni aplaste.

No se conecte en reversa o cortocircuito.


No exponga al calor excesivo.

Para reducir el riesgo de contraer Injury,

lea todas las instrucciones.

**7.0 Illustrations**

**Illustration 2 - Circuit diagram (representive)**

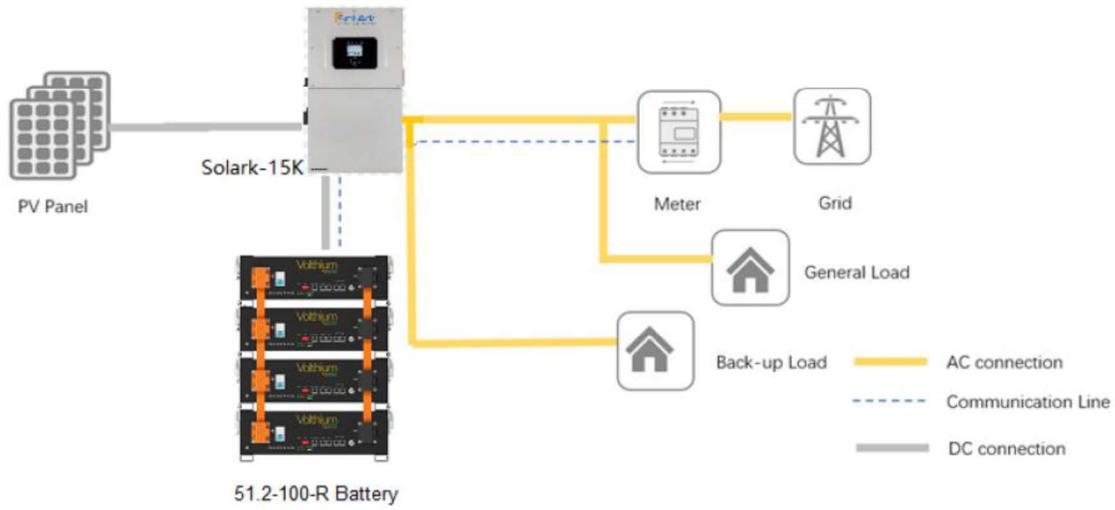

## 7.0 Illustrations

### Illustration 3 - User manual(partly)

## 2. Safety

### 2.1 Safety precautions

#### DANGER

##### Explosion risk

- Do not impact the battery with heavy objects.
- Do not squeeze or pierce the battery pack.
- Do not throw the battery pack into the fire.

#### WARNING

##### Fire risk

- Do not expose the battery pack to the condition over 80°C.
- Do not put the battery near a heat source, such as a fireplace.
- Do not expose the battery pack to direct sunlight or raining.

#### CAUTION

##### Electric shock risk

- Do not allow non-qualified person to disassemble the battery pack.
- Do not touch the battery pack with wet hands.
- Do not expose the battery pack to moisture or liquid environment.

#### NOTICE

##### Damage risk

- Do not short-circuit or reverse connect the battery.
- Do not use chargers or charging devices unapproved by the manufacturer to charge the battery.
- Do not mix batteries from different manufacturers or different kinds, types or brands.

### 2.2 Safety instructions

The battery has been designed and tested in accordance with international (such as UL, IEC, UN38.3 etc.)

## 7.0 Illustrations

### Illustration 3a - User manual(partly)

safety requirements. However, due to various factors during the whole lifetime process, Volthium cannot guarantee absolute safety, in order to prevent personal injury and property damage and ensure long-term operation of the battery, please do read the below section carefully to operate the battery and handle emergency situations.

#### 2.2.1 Safety gear

It is required to wear the following safety gear when installing and handling the battery pack.



Insulated gloves



Safety Glasses



Safety Shoes

#### 2.2.2 Emergency safety measures

##### Water invasion

Please cut off the AC power supply of the system first and then disconnect all switched under the premise of ensuring safety.

##### Electrolyte or gas leakage

If the battery pack leaks electrolyte, avoid contact with the leaking liquid or gas. If one is exposed to the leaked substance, immediately perform the actions described below.

- **Gas Inhalation:** Evacuate the people in the contaminated area and seek medical aid immediately.
- **Eye Contact:** Flush your eye with clean and flowing water for 15 min, and seek medical aid immediately.
- **Skin Contact:** Thoroughly rinse the exposed area with soap and water to be sure no chemical or soap is left on them, and seek medical aid immediately.
- **Ingestion:** Induce vomiting, and seek medical help immediately.

### ⚠ WARNING

In case of fire situations, please use carbon dioxide fire extinguisher rather than liquid to put out fires.

#### 2.2.3 Other Tips

- All the product are strictly inspected before shipment, please contact your supplier for replacement if you notice there's any defectives such as swelling.
- Do not disassemble batteries and components, otherwise the manufacturer will not be responsible for any damage caused by unauthorized disassembly or repair.
- Do enable the battery to be safely grounded before use to make sure the system in safe and normal operation.
- Please ensure that the electric parameters of these devices are compatible mutually before connecting the battery to other devices.
- Please take the environmental factors into careful considerations to ensure that the system can work in a suitable condition as the environment and storage methods have a certain impact on the service life and reliability of this product.

## 7.0 Illustrations

### Illustration 3b - User manual(partly)

#### 4.3 Start Installation

##### Qualified person

##### 4.3.1 Remainder

Please check again the following conditions or equipment whether meet the requirements before installation:

- Check if there's enough space for installation, and if the load-bearing capacity of the bracket or cabinet meets the weight requirements.
- Check whether the power cable pair(s) used meets the maximum current requirement for operation.
- Check whether the overall layout of power supply equipment and batteries at the construction site is reasonable.
- Check whether the installer is wearing anti-static wristband.
- Check whether there're two people on the construction site for installation work.
- Check if there's potential risks at location of installation site, e.g flooding, sun exposure, corrosion, and salt spray.

##### 4.3.2 Procedures

###### CAUTION

Injuries may result if the product is lifted incorrectly or dropped while being transported or mounted.  
Wear suitable personal protective equipment for all work on the product.

###### CAUTION

Ensure that no lines are laid in the wall which could be damaged when drilling holes.

##### 4.3.2.1 Rack mounted

**7.0 Illustrations**

**Illustration 3c - User manual(partly)**

|   |
|---|
| 1.Take the battery pack out from carton.  |
| 2.Get the Rack or cabinet ready and place it horizontally at a reasonable location.   |
| 3.Place the battery on the rack or cabinet tray via manual-lift, Insert the screws and fasten the battery to the rack or cabinet. |
| 4.Finish the cable connection   |

**4.3.2.2 Stack mounted**

|   |  |
|---|--|
| 1.Take the battery pack out from carton.  |  |
| 2.Remove the mounting ear from both side of the battery.  |    |
| 3.Install the stacking component at four corners of the battery.  |   |
| 4.Remove the hook on the stacking component of the bottom battery of each stack.                                      |  |
| 5.Put another battery on top of the previous module, and align the locating holes and connect the 4 lockers together. |  |
| 6.The maximum number in each stack is 4 modules.<br>7.Finish the cable connection                                     |  |

Note: Do not stack the batteries directly.

## 7.0 Illustrations

Illustration 3d - User manual(partly)

### 6. Sol-ark installation

#### 6.1 Safety precautions

This guide provides explanations and procedures for installing Sol-Ark Hybrid Inverter. Before installing the Sol-Ark Hybrid inverter, read all instructions and cautionary markings in this Guide. For information about operating the Sola-Ark Hybrid inverter, see the Sol-Ark users Manual.

#### NOTICE

Obtain all necessary permits prior to starting the installation. Installations must meet all local codes and standards. Installation of these equipment should only be performed by skilled personnel such as qualified electricians and Certified Renewable Energy (RE) System installers.

#### WARNING

##### HEAVY EQUIPMENT

The Sol-Ark Hybrid inverter weighs approximately 120lbs. A two-person lift is required. To prevent injury, always use proper lifting techniques during installation.

Sol-Ark: At a First Glance

**7.0 Illustrations**

**Illustration 3e - User manual(partly)**


**6.2 At a First Glance**

**INSPECT SHIPMENT**

The box should include all items shown in the component guide. If there is damage or missing parts, immediately call the phone number (USA) +1 (972) 575-8875 Ext. 2.

**COMPONENT GUIDE**

The Sol-Ark 15K-2P-N system includes the following components:

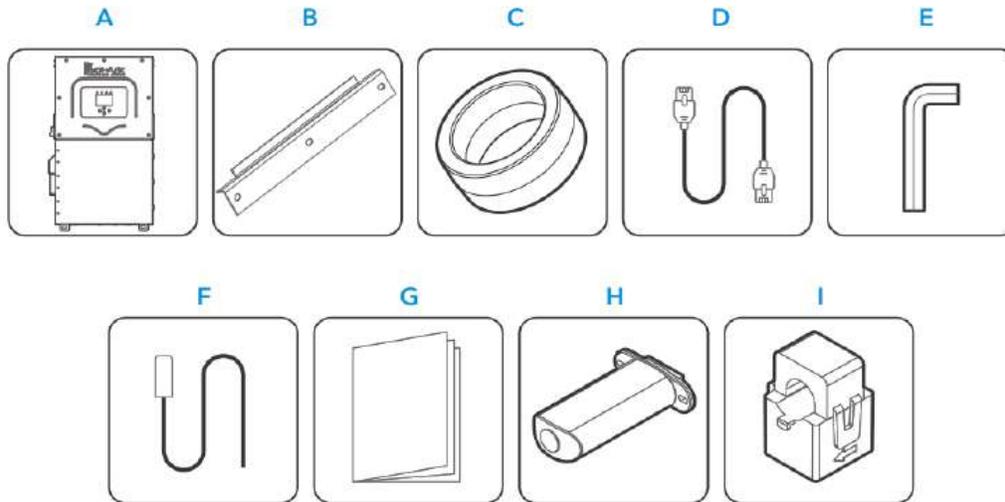


| Component | Description                                      | Quantity |
|-----------|--|----------|
| A         | Sol-Ark 15K-2P-N inverter                        | 1        |
| B         | French cleat                                     | 1        |
| C         | Battery toroid                                   | 2        |
| D         | CAT 5E communication cable                       | 1        |
| E         | Allen key (4 mm)                                 | 1        |
| F         | Temperature sensor                               | 1        |
| G         | User manual                                      | 1        |
| H         | Wi-Fi / Ethernet antenna (dongle)                | 1        |
| I         | 300A (Ø1.378") Current transformers (CT sensors) | 2        |

**7.0 Illustrations**

**Illustration 3f - User manual(partly)**

**6.3 General Description**

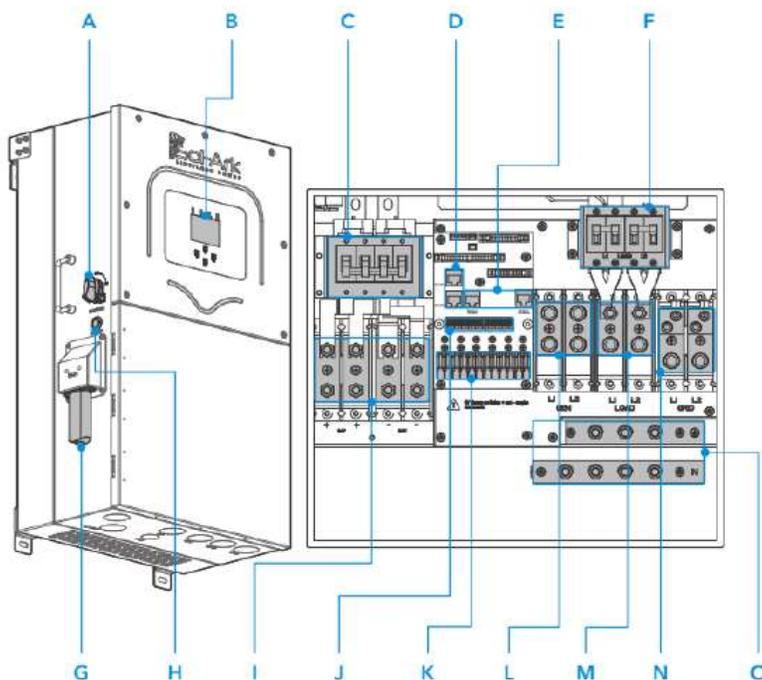


| Component | Name                         | Component | Name                                      |
|-----------|------------------------------|-----------|---|
| A         | PV DC disconnect             | I         | Battery terminals                         |
| B         | LCD touch screen             | J         | Input pinouts for sensors and accessories |
| C         | 2x (200A) battery breakers   | K         | 3x MPPT inputs                            |
| D         | Parallel RJ45 ports          | L         | (90A) GEN terminal                        |
| E         | BMS RJ45 ports (RS485 / CAN) | M         | (200A) LOAD terminal                      |
| F         | (200A) LOAD breaker          | N         | (200A) GRID terminal                      |
| G         | Wi-Fi / Ethernet dongle      | O         | GROUND / NEUTRAL Busbars                  |
| H         | ON / OFF Button              |           |   |

**7.0 Illustrations**

Illustration 3g - User manual(partly)

**6.4 Specifications**

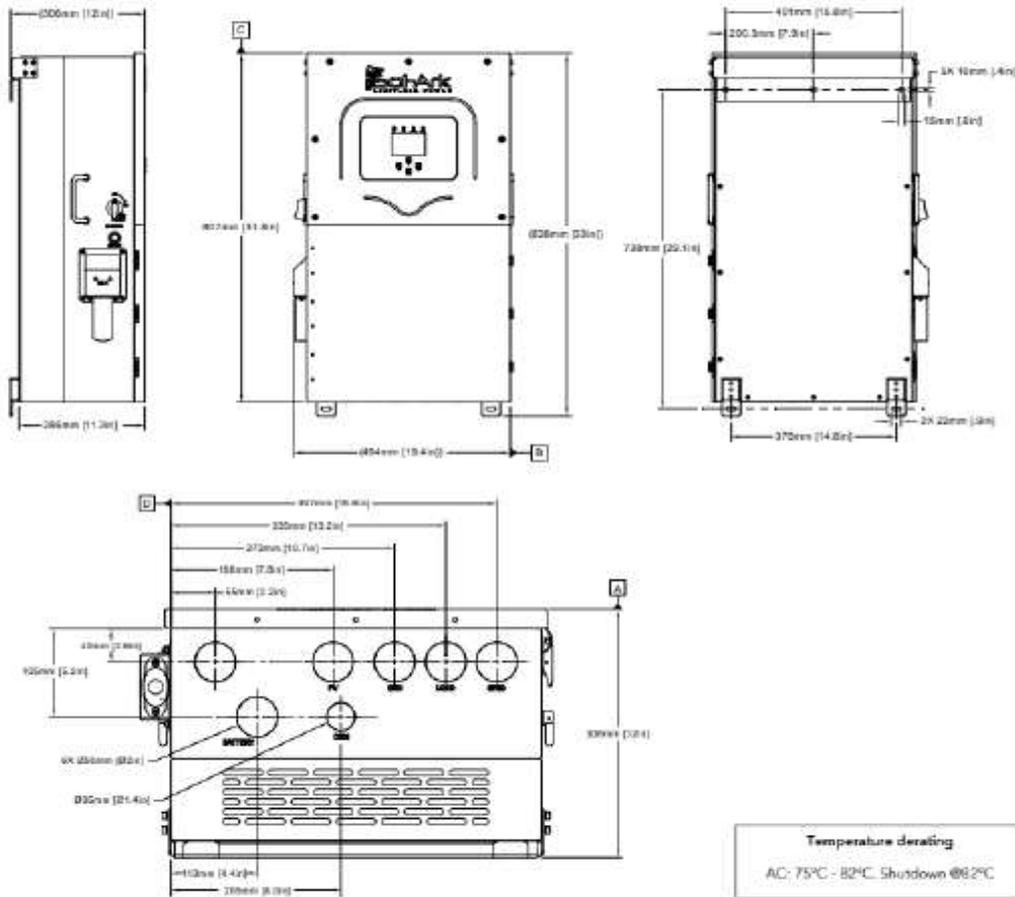

SOL-ARK 15K-2P-N TORQUE VALUES APPLICATION NOTE

| Terminal / Breaker        | Torque [in-lb] | Torque [Nm] |
|---------------------------|----------------|-------------|
| "LOAD"                    | 165 in-lb      | 18.6 Nm     |
| "GRID"                    | 165 in-lb      | 18.6 Nm     |
| "GEN"                     | 165 in-lb      | 18.6 Nm     |
| Neutral / Ground (Busbar) | 121 in-lb      | 13.7 Nm     |
| Cover Screws              | 15.5 in-lb     | 1.75 Nm     |
| Battery Connection        | 90 in-lb       | 10 Nm       |

**7.0 Illustrations**

**Illustration 3h - User manual(partly)**


**6.5 Connection Requirements**

**1. AC / DC Connection Requirements**

| Port           | Terminal Rating    | Terminal Wire Size Range (min-max) |
|----------------|--------------------|------------------------------------|
| GRID           | 200A <sub>AC</sub> | 1/0 - 4/0 AWG                      |
| LOAD           | 200A <sub>AC</sub> | 1/0 - 4/0 AWG                      |
| GEN            | 90A <sub>AC</sub>  | 2 - 4/0 AWG                        |
| MPPT           | 44A <sub>ISC</sub> | 12 - 10 AWG                        |
| Battery Port A | 200A <sub>DC</sub> | 2/0 - 4/0 AWG                      |
| Battery Port B | 200A <sub>DC</sub> | 2/0 - 4/0 AWG                      |

**2. Sensors and Communications Requirements**

| Component                   | Wire Size Range  | Max Distance  |
|-----------------------------|------------------|---|
| CT Sensor                   | 16-20 AWG        | 0' - 10' [3 m]: 16 AWG included<br>10' - 20' [6 m]: CAT6 extendable |
| Communications              | 24 - 23 AWG      | 0' - 100' [30 m]: 24 AWG<br>100' - 400' [120 m]: 23 AWG             |
| RJ45 Parallel Communication | CAT 5E or better | 0' - 7' [2.1 m]: Included<br>7' - 20' [6m]: Extendable              |

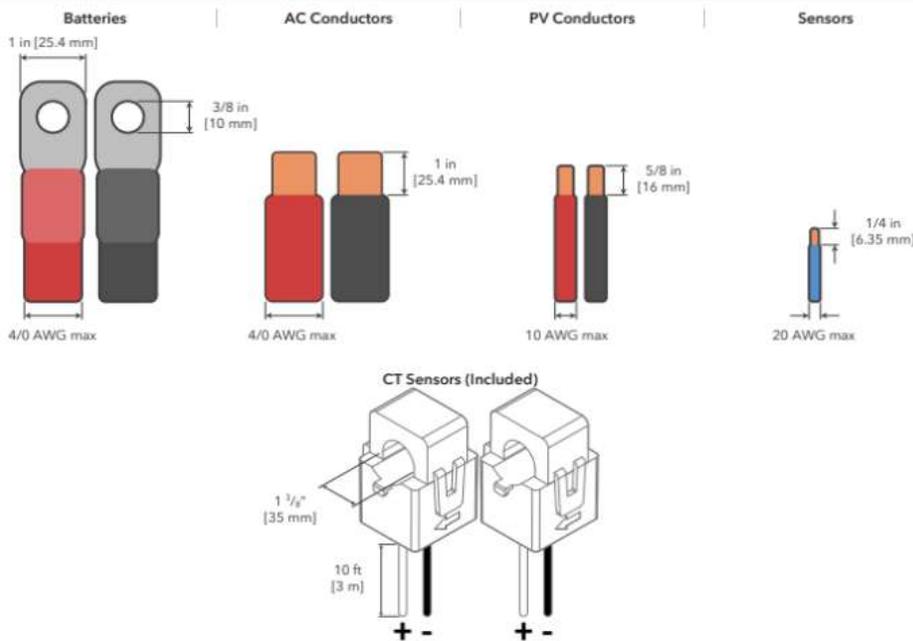


## 7.0 Illustrations

### Illustration 3i - User manual(partly)

#### 6.6 Installation the Sol-Ark

##### 1. Mounting the Sol-Ark

A. Considering the dimensions of the inverter, find a suitable location for the system. There must be at least 6 in [15 cm] of vertical clearance and 2 in [5 cm] of side clearance for proper heat dissipation.

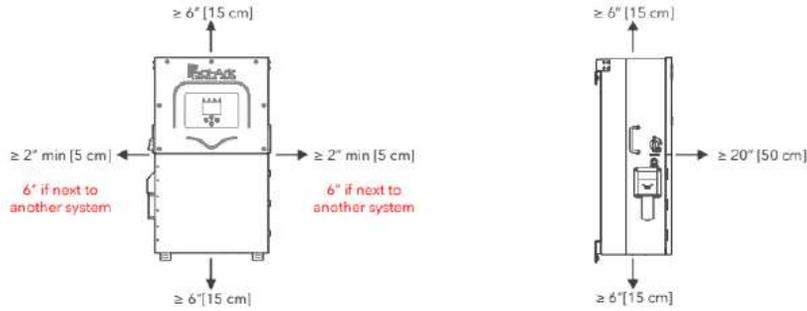

B. Under certain conditions, the National Electrical Code® specifies greater clearances. Ensure that the prescribed clearances in accordance with the National Electrical Code®, paragraph 110.26 and Canadian Electrical Code® CSA C22.1 are adhered to.

C. The Sol-Ark 15K-2P-N is a NEMA 3R - IP65 enclosure that is rated for outdoor installation but can also be installed indoors.

D. PROTECT THE LCD SCREEN from direct exposure to UV light.


E. Use screws or anchors suitable for the support surface and capable of supporting the weight of the inverter (135 lb / 61kg).

- a. For Concrete or Masonry Mounting: Use a minimum of five (5) 3/8in expanding anchors (not included).
- b. For Wood Frame Mounting: Use a minimum of five (5) 3/8in lag screws with flat washers, making sure to anchor into at least 2 framing members. (not included)
- c. For Metal Framing Mounting: Use a minimum of five (5) 1/4in self-tapping metal screws with flat washers. (not included)

F. In the case a different anchorage is required, calculate the support needed to properly hold the weight of the equipment.


**7.0 Illustrations**

**Illustration 3j - User manual(partly)**

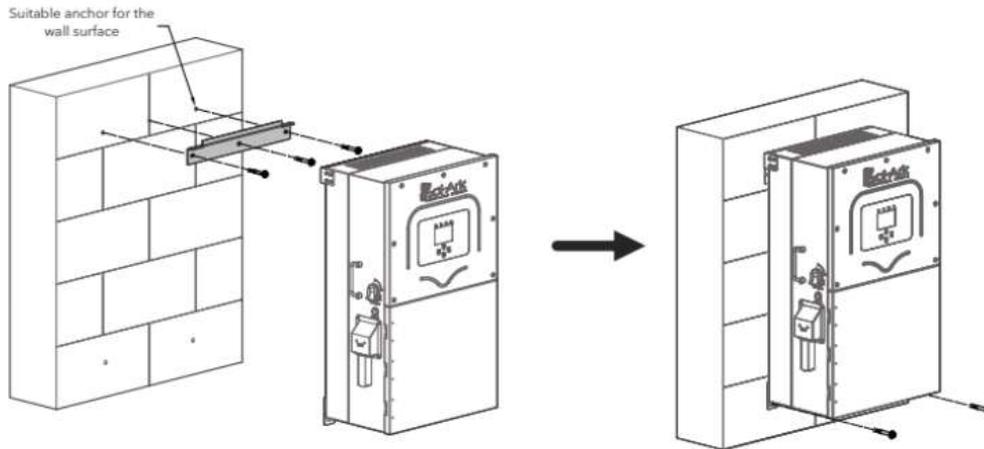

⚠ Damage to the LCD Screen due to direct sunlight exposure will not be covered by warranty

G. Mount the inverter in the optimal orientation as shown below.

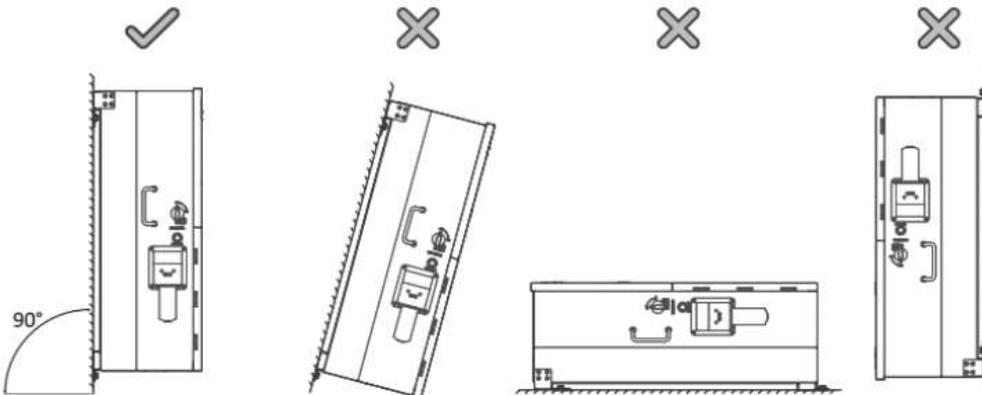


**2. Integrating Batteries**

**A. Battery Toroid**

Install the included toroids on the battery conductors as shown in the next figure. Ensure that both (+) and (-) wires pass through both toroids simultaneously. When there are four (4) wires present, all conductors must go through the toroids as depicted below


**7.0 Illustrations**

**Illustration 3k - User manual(partly)**

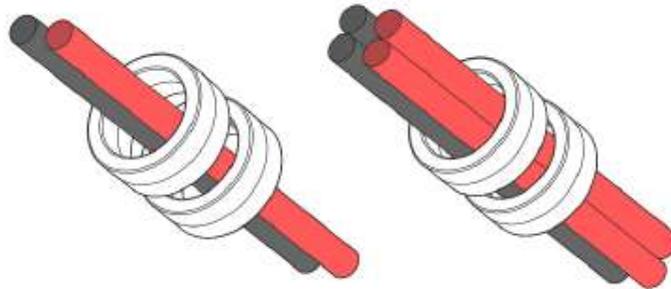


**B. Multi-Terminal Installation**

The two battery input terminals of the 15K-2P-N will parallel batteries internally to ensure a common connection between battery banks and simplify battery installations. If a charge / discharge rate of 275A is needed, the batteries must be connected to both input terminals. If using 3 or more batteries, use external busbars for (+) and (-) connections

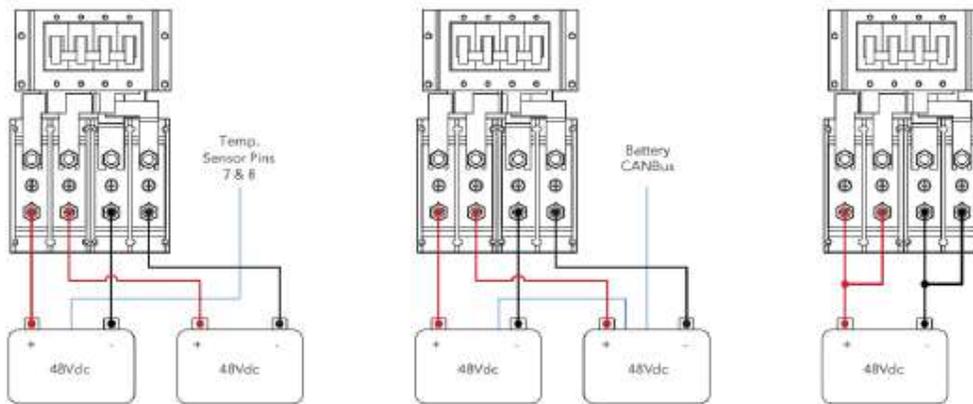

**6.7 Battery Communication**

The Sol-Ark 15K-2P-N inverter achieves battery communications through a single RJ-45 port labeled “Battery CANBus”. This port combines the RS-485 and CANBus pin configurations shown below. Both “Modbus RS485” and “Battery CANBus” ports are capable of Modbus communication.

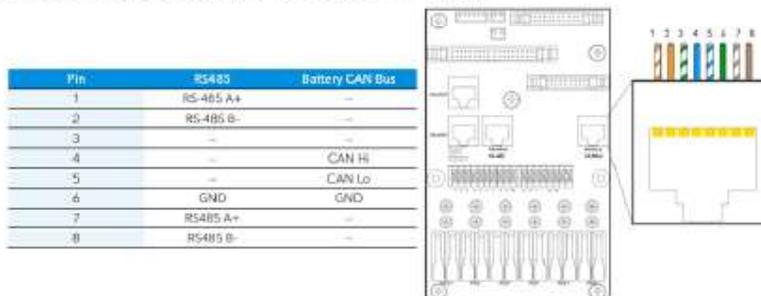

**7.0 Illustrations**

**Illustration 4 - Ratings**

| Model  | 51.2-100V2-SOL<br>15K1    | 51.2-100V3-SOL<br>15K1 | 51.2-100V4-SOL<br>15K1 | 51.2-100V5-SOL<br>15K1 |
|--|---------------------------|------------------------|------------------------|------------------------|
| <b>Battery data</b>                              |                           |                        |                        |                        |
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 200Ah                     | 300Ah                  | 400Ah                  | 500Ah                  |
| Total energy                                     | 10.24kWh                  | 15.36kWh               | 20.48kWh               | 25.6kWh                |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 140 Adc                   | 210 Adc                | 275 Adc                | 275 Adc                |
| Max. discharge current                           | 200 Adc                   | 275 Adc                | 275 Adc                | 275 Adc                |
| Parallel Number                                  | 1S2P                      | 1S3P                   | 1S4P                   | 1S5P                   |
| <b>PV Input data</b>                             |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A+26A               |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A+44A               |                        |                        |                        |
| <b>Grid Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 15000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 62.5Arms                  |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>Grid/ Generator Input Data</b>                |                           |                        |                        |                        |
| Rated power                                      | 15000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 62.5Arms                  |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| <b>Load Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 15000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 62.5Arms                  |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>General Data</b>                              |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4a - Ratings**

| Model  | 51.2-100V6-SOL<br>15K1    | 51.2-100V7-SOL<br>15K1 | 51.2-100V8-SOL<br>15K1 | 51.2-100V9-SOL<br>15K1 |
|--|---------------------------|------------------------|------------------------|------------------------|
| <b>Battery data</b>                              |                           |                        |                        |                        |
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 600Ah                     | 700Ah                  | 800Ah                  | 900Ah                  |
| Total energy                                     | 30.72kWh                  | 35.84kWh               | 40.96kWh               | 46.08kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 275 Adc                   | 275 Adc                | 275 Adc                | 275 Adc                |
| Max. discharge current                           | 275 Adc                   | 275 Adc                | 275 Adc                | 275 Adc                |
| Parallel Number                                  | 1S6P                      | 1S7P                   | 1S8P                   | 1S9P                   |
| <b>PV Input data</b>                             |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A+26A               |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A+44A               |                        |                        |                        |
| <b>Grid Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 15000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 62.5Arms                  |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>Grid/ Generator Input Data</b>                |                           |                        |                        |                        |
| Rated power                                      | 15000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 62.5Arms                  |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| <b>Load Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 15000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 62.5Arms                  |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>General Data</b>                              |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4b - Ratings**

| Model  | 51.2-100V10-SOL<br>15K1   | 51.2-100V11-SOL<br>15K1 | 51.2-100V12-SOL<br>15K1 | 51.2-100V13-SOL<br>15K1 |
|--|---------------------------|-------------------------|-------------------------|-------------------------|
| <b>Battery data</b>                              |                           |                         |                         |                         |
| Battery type                                     | LiFePO4                   |                         |                         |                         |
| Total capacity                                   | 1000Ah                    | 1100Ah                  | 1200Ah                  | 1300Ah                  |
| Total energy                                     | 51.2kWh                   | 56.32kWh                | 61.44kWh                | 66.56kWh                |
| Battery voltage range                            | 44.8-57.6 Vdc             |                         |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                         |                         |                         |
| Max. charge current                              | 275 Adc                   | 275 Adc                 | 275 Adc                 | 275 Adc                 |
| Max. discharge current                           | 275 Adc                   | 275 Adc                 | 275 Adc                 | 275 Adc                 |
| Parallel Number                                  | 1S10P                     | 1S11P                   | 1S12P                   | 1S13P                   |
| <b>PV Input data</b>                             |                           |                         |                         |                         |
| Max. input voltage                               | 500Vdc                    |                         |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                         |                         |                         |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |                         |                         |                         |
| Max. input continuous current (dc)               | 26A+26A+26A               |                         |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A+44A               |                         |                         |                         |
| <b>Grid Output Data</b>                          |                           |                         |                         |                         |
| Rated power                                      | 15000W                    |                         |                         |                         |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 62.5Arms                  |                         |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| <b>Grid/ Generator Input Data</b>                |                           |                         |                         |                         |
| Rated power                                      | 15000W                    |                         |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Input Current                               | 62.5Arms                  |                         |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                         |                         |                         |
| <b>Load Output Data</b>                          |                           |                         |                         |                         |
| Rated power                                      | 15000W                    |                         |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 62.5Arms                  |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| <b>General Data</b>                              |                           |                         |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                         |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                         |                         |                         |
| Install Location                                 | Indoor use                |                         |                         |                         |
| Protection Class                                 | IP20                      |                         |                         |                         |

**7.0 Illustrations**

**Illustration 4c - Ratings**

|  |                           |
|--|---------------------------|
| Model  | 51.2-100V14-SOL 15K1      |
| <b>Battery data</b>                              |                           |
| Battery type                                     | LiFePO4                   |
| Total capacity                                   | 1400Ah                    |
| Total energy                                     | 71.68kWh                  |
| Battery voltage range                            | 44.8-57.6 Vdc             |
| Nominal voltage                                  | 51.2 Vdc                  |
| Max. charge current                              | 275 Adc                   |
| Max. discharge current                           | 275 Adc                   |
| Parallel Number                                  | 1S14P                     |
| <b>PV Input data</b>                             |                           |
| Max. input voltage                               | 500Vdc                    |
| Range of input operating voltage                 | 175Vdc-425Vdc             |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |
| Max. input continuous current (dc)               | 26A+26A+26A               |
| Max. short circuit current (dc)                  | 44A+44A+44A               |
| <b>Grid Output Data</b>                          |                           |
| Rated power                                      | 15000W                    |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 62.5Arms                  |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| <b>Grid/ Generator Input Data</b>                |                           |
| Rated power                                      | 15000W                    |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Input Current                               | 62.5Arms                  |
| Max. Input short circuit current                 | 146A@rms for one inverter |
| <b>Load Output Data</b>                          |                           |
| Rated power                                      | 15000W                    |
| Rated Voltage                                    | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 62.5Arms                  |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| <b>General Data</b>                              |                           |
| Charging Temperature Range                       | -5°C to 55°C              |
| Discharging Temperature Range                    | -20°C to 55°C             |
| Install Location                                 | Indoor use                |
| Protection Class                                 | IP20                      |

**7.0 Illustrations**

**Illustration 4d - Ratings**

| Model  | 51.2-100V4-SOL<br>15K2    | 51.2-100V5-SOL<br>15K2 | 51.2-100V6-SOL<br>15K2 | 51.2-100V7-SOL<br>15K2 |
|--|---------------------------|------------------------|------------------------|------------------------|
| <b>Battery data</b>                              |                           |                        |                        |                        |
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 400Ah                     | 500Ah                  | 600Ah                  | 700Ah                  |
| Total energy                                     | 20.48kWh                  | 25.6kWh                | 30.72kWh               | 35.84kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 280 Adc                   | 350 Adc                | 420 Adc                | 490 Adc                |
| Max. discharge current                           | 400 Adc                   | 500 Adc                | 550 Adc                | 550 Adc                |
| Parallel Number                                  | 1S4P                      | 1S5P                   | 1S6P                   | 1S7P                   |
| <b>PV Input data</b>                             |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A+26A               |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A+44A               |                        |                        |                        |
| <b>Grid Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 30000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 125Arms                   |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>Grid/ Generator Input Data</b>                |                           |                        |                        |                        |
| Rated power                                      | 30000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 125Arms                   |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| <b>Load Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 30000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 125Arms                   |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>General Data</b>                              |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4e - Ratings**

| Model  | 51.2-100V8-SOL<br>15K2    | 51.2-100V9-SOL<br>15K2 | 51.2-100V10-SOL<br>15K2 | 51.2-100V11-SOL<br>15K2 |
|--|---------------------------|------------------------|-------------------------|-------------------------|
| Battery type                                     | LiFePO4                   |                        |                         |                         |
| Total capacity                                   | 800Ah                     | 900Ah                  | 1000Ah                  | 1100Ah                  |
| Total energy                                     | 40.96kWh                  | 46.08kWh               | 51.2kWh                 | 56.32kWh                |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                         |                         |
| Max. charge current                              | 550 Adc                   | 550 Adc                | 550 Adc                 | 550 Adc                 |
| Max. discharge current                           | 550 Adc                   | 550 Adc                | 550 Adc                 | 550 Adc                 |
| Parallel Number                                  | 1S8P                      | 1S9P                   | 1S10P                   | 1S11P                   |
| PV Input data                                    |                           |                        |                         |                         |
| Max. input voltage                               | 500Vdc                    |                        |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                         |                         |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |                        |                         |                         |
| Max. input continuous current (dc)               | 26A+26A+26A               |                        |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A+44A               |                        |                         |                         |
| Grid Output Data                                 |                           |                        |                         |                         |
| Rated power                                      | 30000W                    |                        |                         |                         |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                         |                         |
| Rated Frequency                                  | 60Hz                      |                        |                         |                         |
| Max. Output Current                              | 125Arms                   |                        |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                         |                         |
| Grid/ Generator Input Data                       |                           |                        |                         |                         |
| Rated power                                      | 30000W                    |                        |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                         |                         |
| Rated Frequency                                  | 60Hz                      |                        |                         |                         |
| Max. Input Current                               | 125Arms                   |                        |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                         |                         |
| Load Output Data                                 |                           |                        |                         |                         |
| Rated power                                      | 30000W                    |                        |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                         |                         |
| Rated Frequency                                  | 60Hz                      |                        |                         |                         |
| Max. Output Current                              | 125Arms                   |                        |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                         |                         |
| General Data                                     |                           |                        |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                         |                         |
| Install Location                                 | Indoor use                |                        |                         |                         |
| Protection Class                                 | IP20                      |                        |                         |                         |

**7.0 Illustrations**

**Illustration 4f - Ratings**

| Model  | 51.2-100V12-SOL<br>15K2   | 51.2-100V13-SOL<br>15K2 | 51.2-100V14-SOL<br>15K2 | 51.2-100V15-SOL<br>15K2 |
|--|---------------------------|-------------------------|-------------------------|-------------------------|
| Battery type                                     | LiFePO4                   |                         |                         |                         |
| Total capacity                                   | 1200Ah                    | 1300Ah                  | 1400Ah                  | 1500Ah                  |
| Total energy                                     | 61.44kWh                  | 66.56kWh                | 71.68kWh                | 76.8kWh                 |
| Battery voltage range                            | 44.8-57.6 Vdc             |                         |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                         |                         |                         |
| Max. charge current                              | 550 A <sub>dc</sub>       | 550 A <sub>dc</sub>     | 550 A <sub>dc</sub>     | 550 A <sub>dc</sub>     |
| Max. discharge current                           | 550 A <sub>dc</sub>       | 550 A <sub>dc</sub>     | 550 A <sub>dc</sub>     | 550 A <sub>dc</sub>     |
| Parallel Number                                  | 1S12P                     | 1S13P                   | 1S14P                   | 1S15P                   |
| PV Input data                                    |                           |                         |                         |                         |
| Max. input voltage                               | 500Vdc                    |                         |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                         |                         |                         |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |                         |                         |                         |
| Max. input continuous current (dc)               | 26A+26A+26A               |                         |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A+44A               |                         |                         |                         |
| Grid Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 125Arms                   |                         |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| Grid/ Generator Input Data                       |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Input Current                               | 125Arms                   |                         |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                         |                         |                         |
| Load Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 125Arms                   |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| General Data                                     |                           |                         |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                         |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                         |                         |                         |
| Install Location                                 | Indoor use                |                         |                         |                         |
| Protection Class                                 | IP20                      |                         |                         |                         |

**7.0 Illustrations**

**Illustration 4g - Ratings**

| Model  | 51.2-100V16-SOL<br>15K2   | 51.2-100V17-SOL<br>15K2 | 51.2-100V18-SOL<br>15K2 | 51.2-100V19-SOL<br>15K2 |
|--|---------------------------|-------------------------|-------------------------|-------------------------|
| Battery type                                     | LiFePO4                   |                         |                         |                         |
| Total capacity                                   | 1600Ah                    | 1700Ah                  | 1800Ah                  | 1900Ah                  |
| Total energy                                     | 81.92kWh                  | 87.04kWh                | 92.16kWh                | 97.28kWh                |
| Battery voltage range                            | 44.8-57.6 Vdc             |                         |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                         |                         |                         |
| Max. charge current                              | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Max. discharge current                           | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Parallel Number                                  | 1S16P                     | 1S17P                   | 1S18P                   | 1S19P                   |
| PV Input data                                    |                           |                         |                         |                         |
| Max. input voltage                               | 500Vdc                    |                         |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                         |                         |                         |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |                         |                         |                         |
| Max. input continuous current (dc)               | 26A+26A+26A               |                         |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A+44A               |                         |                         |                         |
| Grid Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 125Arms                   |                         |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| Grid/ Generator Input Data                       |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Input Current                               | 125Arms                   |                         |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                         |                         |                         |
| Load Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 125Arms                   |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| General Data                                     |                           |                         |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                         |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                         |                         |                         |
| Install Location                                 | Indoor use                |                         |                         |                         |
| Protection Class                                 | IP20                      |                         |                         |                         |

**7.0 Illustrations**

**Illustration 4h - Ratings**

| Model  | 51.2-100V20-SOL<br>15K2   | 51.2-100V21-SOL<br>15K2 | 51.2-100V22-SOL<br>15K2 | 51.2-100V23-SOL<br>15K2 |
|--|---------------------------|-------------------------|-------------------------|-------------------------|
| Battery type                                     | LiFePO4                   |                         |                         |                         |
| Total capacity                                   | 2000Ah                    | 2100Ah                  | 2200Ah                  | 2300Ah                  |
| Total energy                                     | 102.4kWh                  | 107.52kWh               | 112.64kWh               | 117.76kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                         |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                         |                         |                         |
| Max. charge current                              | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Max. discharge current                           | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Parallel Number                                  | 1S20P                     | 1S21P                   | 1S22P                   | 1S23P                   |
| PV Input data                                    |                           |                         |                         |                         |
| Max. input voltage                               | 500Vdc                    |                         |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                         |                         |                         |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |                         |                         |                         |
| Max. input continuous current (dc)               | 26A+26A+26A               |                         |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A+44A               |                         |                         |                         |
| Grid Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 125Arms                   |                         |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| Grid/ Generator Input Data                       |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Input Current                               | 125Arms                   |                         |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                         |                         |                         |
| Load Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 125Arms                   |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| General Data                                     |                           |                         |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                         |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                         |                         |                         |
| Install Location                                 | Indoor use                |                         |                         |                         |
| Protection Class                                 | IP20                      |                         |                         |                         |

**7.0 Illustrations**

**Illustration 4i - Ratings**

| Model  | 51.2-100V24-SOL<br>15K2   | 51.2-100V25-SOL<br>15K2 | 51.2-100V26-SOL<br>15K2 | 51.2-100V27-SOL<br>15K2 |
|--|---------------------------|-------------------------|-------------------------|-------------------------|
| Battery type                                     | LiFePO4                   |                         |                         |                         |
| Total capacity                                   | 2400Ah                    | 2500Ah                  | 2600Ah                  | 2700Ah                  |
| Total energy                                     | 122.88kWh                 | 128kWh                  | 133.12kWh               | 138.24kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                         |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                         |                         |                         |
| Max. charge current                              | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Max. discharge current                           | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Parallel Number                                  | 1S24P                     | 1S25P                   | 1S26P                   | 1S27P                   |
| PV Input data                                    |                           |                         |                         |                         |
| Max. input voltage                               | 500Vdc                    |                         |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                         |                         |                         |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |                         |                         |                         |
| Max. input continuous current (dc)               | 26A+26A+26A               |                         |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A+44A               |                         |                         |                         |
| Grid Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 125Arms                   |                         |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| Grid/ Generator Input Data                       |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Input Current                               | 125Arms                   |                         |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                         |                         |                         |
| Load Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 30000W                    |                         |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 125Arms                   |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| General Data                                     |                           |                         |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                         |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                         |                         |                         |
| Install Location                                 | Indoor use                |                         |                         |                         |
| Protection Class                                 | IP20                      |                         |                         |                         |

**7.0 Illustrations**

**Illustration 4j - Ratings**

|  |                           |
|--|---------------------------|
| Model  | 51.2-100V28-SOL 15K2      |
| Battery type                                     | LiFePO4                   |
| Total capacity                                   | 2800Ah                    |
| Total energy                                     | 143.36kWh                 |
| Battery voltage range                            | 44.8-57.6 Vdc             |
| Nominal voltage                                  | 51.2 Vdc                  |
| Max. charge current                              | 550 Adc                   |
| Max. discharge current                           | 550 Adc                   |
| Parallel Number                                  | 1S28P                     |
| <b>PV Input data</b>                             |                           |
| Max. input voltage                               | 500Vdc                    |
| Range of input operating voltage                 | 175Vdc-425Vdc             |
| Range of input operating voltage with full power | 200Vdc-425Vdc             |
| Max. input continuous current (dc)               | 26A+26A+26A               |
| Max. short circuit current (dc)                  | 44A+44A+44A               |
| <b>Grid Output Data</b>                          |                           |
| Rated power                                      | 30000W                    |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 125Arms                   |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| <b>Grid/ Generator Input Data</b>                |                           |
| Rated power                                      | 30000W                    |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Input Current                               | 125Arms                   |
| Max. Input short circuit current                 | 146A@rms for one inverter |
| <b>Load Output Data</b>                          |                           |
| Rated power                                      | 30000W                    |
| Rated Voltage                                    | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 125Arms                   |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| <b>General Data</b>                              |                           |
| Charging Temperature Range                       | -5°C to 55°C              |
| Discharging Temperature Range                    | -20°C to 55°C             |
| Install Location                                 | Indoor use                |
| Protection Class                                 | IP20                      |

**7.0 Illustrations**

**Illustration 4k - Ratings**

| Model  | 51.2-100V2-SOL<br>12K1    | 51.2-100V3-SOL<br>12K1 | 51.2-100V4-SOL<br>12K1 | 51.2-100V5-SOL<br>12K1 |
|--|---------------------------|------------------------|------------------------|------------------------|
| <b>Battery data</b>                              |                           |                        |                        |                        |
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 200Ah                     | 300Ah                  | 400Ah                  | 500Ah                  |
| Total energy                                     | 10.24kWh                  | 15.36kWh               | 20.48kWh               | 25.6kWh                |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 140 Adc                   | 210 Adc                | 275 Adc                | 275 Adc                |
| Max. discharge current                           | 200 Adc                   | 275 Adc                | 275 Adc                | 275 Adc                |
| Parallel Number                                  | 1S2P                      | 1S3P                   | 1S4P                   | 1S5P                   |
| <b>PV Input data</b>                             |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| <b>Grid Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 12000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 50Arms                    |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>Grid/ Generator Input Data</b>                |                           |                        |                        |                        |
| Rated power                                      | 12000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 50Arms                    |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| <b>Load Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 12000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 50Arms                    |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>General Data</b>                              |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4I - Ratings**

| Model  | 51.2-100V6-SOL<br>12K1    | 51.2-100V7-SOL<br>12K1 | 51.2-100V8-SOL<br>12K1 | 51.2-100V9-SOL<br>12K1 |
|--|---------------------------|------------------------|------------------------|------------------------|
| <b>Battery data</b>                              |                           |                        |                        |                        |
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 600Ah                     | 700Ah                  | 800Ah                  | 900Ah                  |
| Total energy                                     | 30.72kWh                  | 35.84kWh               | 40.96kWh               | 46.08kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 275 Adc                   | 275 Adc                | 275 Adc                | 275 Adc                |
| Max. discharge current                           | 275 Adc                   | 275 Adc                | 275 Adc                | 275 Adc                |
| Parallel Number                                  | 1S6P                      | 1S7P                   | 1S8P                   | 1S9P                   |
| <b>PV Input data</b>                             |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| <b>Grid Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 12000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 50Arms                    |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>Grid/ Generator Input Data</b>                |                           |                        |                        |                        |
| Rated power                                      | 12000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 50Arms                    |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| <b>Load Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 12000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 50Arms                    |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>General Data</b>                              |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4m - Ratings**

| Model  | 51.2-100V10-SOL<br>12K1   | 51.2-100V11-SOL<br>12K1 | 51.2-100V12-SOL<br>12K1 | 51.2-100V13-SOL<br>12K1 |
|--|---------------------------|-------------------------|-------------------------|-------------------------|
| <b>Battery data</b>                              |                           |                         |                         |                         |
| Battery type                                     | LiFePO4                   |                         |                         |                         |
| Total capacity                                   | 1000Ah                    | 1100Ah                  | 1200Ah                  | 1300Ah                  |
| Total energy                                     | 51.2kWh                   | 56.32kWh                | 61.44kWh                | 66.56kWh                |
| Battery voltage range                            | 44.8-57.6 Vdc             |                         |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                         |                         |                         |
| Max. charge current                              | 275 Adc                   | 275 Adc                 | 275 Adc                 | 275 Adc                 |
| Max. discharge current                           | 275 Adc                   | 275 Adc                 | 275 Adc                 | 275 Adc                 |
| Parallel Number                                  | 1S10P                     | 1S11P                   | 1S12P                   | 1S13P                   |
| <b>PV Input data</b>                             |                           |                         |                         |                         |
| Max. input voltage                               | 500Vdc                    |                         |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                         |                         |                         |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                         |                         |                         |
| Max. input continuous current (dc)               | 26A+26A                   |                         |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A                   |                         |                         |                         |
| <b>Grid Output Data</b>                          |                           |                         |                         |                         |
| Rated power                                      | 12000W                    |                         |                         |                         |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 50Arms                    |                         |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| <b>Grid/ Generator Input Data</b>                |                           |                         |                         |                         |
| Rated power                                      | 12000W                    |                         |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Input Current                               | 50Arms                    |                         |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                         |                         |                         |
| <b>Load Output Data</b>                          |                           |                         |                         |                         |
| Rated power                                      | 12000W                    |                         |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 50Arms                    |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| <b>General Data</b>                              |                           |                         |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                         |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                         |                         |                         |
| Install Location                                 | Indoor use                |                         |                         |                         |
| Protection Class                                 | IP20                      |                         |                         |                         |

**7.0 Illustrations**

**Illustration 4n - Ratings**

|  |                           |
|--|---------------------------|
| Model  | 51.2-100V14-SOL 12K1      |
| Battery data                                     |                           |
| Battery type                                     | LiFePO4                   |
| Total capacity                                   | 1400Ah                    |
| Total energy                                     | 71.68kWh                  |
| Battery voltage range                            | 44.8-57.6 Vdc             |
| Nominal voltage                                  | 51.2 Vdc                  |
| Max. charge current                              | 275 Adc                   |
| Max. discharge current                           | 275 Adc                   |
| Parallel Number                                  | 1S14P                     |
| PV Input data                                    |                           |
| Max. input voltage                               | 500Vdc                    |
| Range of input operating voltage                 | 175Vdc-425Vdc             |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |
| Max. input continuous current (dc)               | 26A+26A                   |
| Max. short circuit current (dc)                  | 44A+44A                   |
| Grid Output Data                                 |                           |
| Rated power                                      | 12000W                    |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 50Arms                    |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| Grid/ Generator Input Data                       |                           |
| Rated power                                      | 12000W                    |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Input Current                               | 50Arms                    |
| Max. Input short circuit current                 | 146A@rms for one inverter |
| Load Output Data                                 |                           |
| Rated power                                      | 12000W                    |
| Rated Voltage                                    | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 50Arms                    |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| General Data                                     |                           |
| Charging Temperature Range                       | -5°C to 55°C              |
| Discharging Temperature Range                    | -20°C to 55°C             |
| Install Location                                 | Indoor use                |
| Protection Class                                 | IP20                      |

**7.0 Illustrations**

**Illustration 4o - Ratings**

| Model  | 51.2-100V4-SOL<br>12K2    | 51.2-100V5-SOL<br>12K2 | 51.2-100V6-SOL<br>12K2 | 51.2-100V7-SOL<br>12K2 |
|--|---------------------------|------------------------|------------------------|------------------------|
| Battery data                                     |                           |                        |                        |                        |
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 400Ah                     | 500Ah                  | 600Ah                  | 700Ah                  |
| Total energy                                     | 20.48kWh                  | 25.6kWh                | 30.72kWh               | 35.84kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 280 Adc                   | 350 Adc                | 420 Adc                | 490 Adc                |
| Max. discharge current                           | 400 Adc                   | 500 Adc                | 550 Adc                | 550 Adc                |
| Parallel Number                                  | 1S4P                      | 1S5P                   | 1S6P                   | 1S7P                   |
| PV Input data                                    |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| Grid Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 24000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 100Arms                   |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| Grid/ Generator Input Data                       |                           |                        |                        |                        |
| Rated power                                      | 24000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 100Arms                   |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| Load Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 24000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 100Arms                   |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| General Data                                     |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4p - Ratings**

| Model  | 51.2-100V8-SOL<br>12K2    | 51.2-100V9-SOL<br>12K2 | 51.2-100V10-SOL<br>12K2 | 51.2-100V11-SOL<br>12K2 |
|--|---------------------------|------------------------|-------------------------|-------------------------|
| Battery type                                     | LiFePO4                   |                        |                         |                         |
| Total capacity                                   | 800Ah                     | 900Ah                  | 1000Ah                  | 1100Ah                  |
| Total energy                                     | 40.96kWh                  | 46.08kWh               | 51.2kWh                 | 56.32kWh                |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                         |                         |
| Max. charge current                              | 550 Adc                   | 550 Adc                | 550 Adc                 | 550 Adc                 |
| Max. discharge current                           | 550 Adc                   | 550 Adc                | 550 Adc                 | 550 Adc                 |
| Parallel Number                                  | 1S8P                      | 1S9P                   | 1S10P                   | 1S11P                   |
| PV Input data                                    |                           |                        |                         |                         |
| Max. input voltage                               | 500Vdc                    |                        |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                         |                         |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                         |                         |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                         |                         |
| Grid Output Data                                 |                           |                        |                         |                         |
| Rated power                                      | 24000W                    |                        |                         |                         |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                         |                         |
| Rated Frequency                                  | 60Hz                      |                        |                         |                         |
| Max. Output Current                              | 100Arms                   |                        |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                         |                         |
| Grid/ Generator Input Data                       |                           |                        |                         |                         |
| Rated power                                      | 24000W                    |                        |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                         |                         |
| Rated Frequency                                  | 60Hz                      |                        |                         |                         |
| Max. Input Current                               | 100Arms                   |                        |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                         |                         |
| Load Output Data                                 |                           |                        |                         |                         |
| Rated power                                      | 24000W                    |                        |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                         |                         |
| Rated Frequency                                  | 60Hz                      |                        |                         |                         |
| Max. Output Current                              | 100Arms                   |                        |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                         |                         |
| General Data                                     |                           |                        |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                         |                         |
| Install Location                                 | Indoor use                |                        |                         |                         |
| Protection Class                                 | IP20                      |                        |                         |                         |

**7.0 Illustrations**

**Illustration 4q - Ratings**

| Model  | 51.2-100V12-SOL<br>12K2   | 51.2-100V13-SOL<br>12K2 | 51.2-100V14-SOL<br>12K2 | 51.2-100V15-SOL<br>12K2 |
|--|---------------------------|-------------------------|-------------------------|-------------------------|
| Battery type                                     | LiFePO4                   |                         |                         |                         |
| Total capacity                                   | 1200Ah                    | 1300Ah                  | 1400Ah                  | 1500Ah                  |
| Total energy                                     | 61.44kWh                  | 66.56kWh                | 71.68kWh                | 76.8kWh                 |
| Battery voltage range                            | 44.8-57.6 Vdc             |                         |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                         |                         |                         |
| Max. charge current                              | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Max. discharge current                           | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Parallel Number                                  | 1S12P                     | 1S13P                   | 1S14P                   | 1S15P                   |
| PV Input data                                    |                           |                         |                         |                         |
| Max. input voltage                               | 500Vdc                    |                         |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                         |                         |                         |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                         |                         |                         |
| Max. input continuous current (dc)               | 26A+26A                   |                         |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A                   |                         |                         |                         |
| Grid Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 100Arms                   |                         |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| Grid/ Generator Input Data                       |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Input Current                               | 100Arms                   |                         |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                         |                         |                         |
| Load Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 100Arms                   |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| General Data                                     |                           |                         |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                         |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                         |                         |                         |
| Install Location                                 | Indoor use                |                         |                         |                         |
| Protection Class                                 | IP20                      |                         |                         |                         |

**7.0 Illustrations**

**Illustration 4r - Ratings**

| Model  | 51.2-100V16-SOL<br>12K2   | 51.2-100V17-SOL<br>12K2 | 51.2-100V18-SOL<br>12K2 | 51.2-100V19-SOL<br>12K2 |
|--|---------------------------|-------------------------|-------------------------|-------------------------|
| Battery type                                     | LiFePO4                   |                         |                         |                         |
| Total capacity                                   | 1600Ah                    | 1700Ah                  | 1800Ah                  | 1900Ah                  |
| Total energy                                     | 81.92kWh                  | 87.04kWh                | 92.16kWh                | 97.28kWh                |
| Battery voltage range                            | 44.8-57.6 Vdc             |                         |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                         |                         |                         |
| Max. charge current                              | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Max. discharge current                           | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Parallel Number                                  | 1S16P                     | 1S17P                   | 1S18P                   | 1S19P                   |
| PV Input data                                    |                           |                         |                         |                         |
| Max. input voltage                               | 500Vdc                    |                         |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                         |                         |                         |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                         |                         |                         |
| Max. input continuous current (dc)               | 26A+26A                   |                         |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A                   |                         |                         |                         |
| Grid Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Nominal Output                                   | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 100Arms                   |                         |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| Grid/ Generator Input Data                       |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Input Current                               | 100Arms                   |                         |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                         |                         |                         |
| Load Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 100Arms                   |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| General Data                                     |                           |                         |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                         |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                         |                         |                         |
| Install Location                                 | Indoor use                |                         |                         |                         |
| Protection Class                                 | IP20                      |                         |                         |                         |

**7.0 Illustrations**

**Illustration 4s - Ratings**

| Model  | 51.2-100V20-SOL<br>12K2   | 51.2-100V21-SOL<br>12K2 | 51.2-100V22-SOL<br>12K2 | 51.2-100V23-SOL<br>12K2 |
|--|---------------------------|-------------------------|-------------------------|-------------------------|
| Battery type                                     | LiFePO4                   |                         |                         |                         |
| Total capacity                                   | 2000Ah                    | 2100Ah                  | 2200Ah                  | 2300Ah                  |
| Total energy                                     | 102.4kWh                  | 107.52kWh               | 112.64kWh               | 117.76kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                         |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                         |                         |                         |
| Max. charge current                              | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Max. discharge current                           | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Parallel Number                                  | 1S20P                     | 1S21P                   | 1S22P                   | 1S23P                   |
| PV Input data                                    |                           |                         |                         |                         |
| Max. input voltage                               | 500Vdc                    |                         |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                         |                         |                         |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                         |                         |                         |
| Max. input continuous current (dc)               | 26A+26A                   |                         |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A                   |                         |                         |                         |
| Grid Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 100Arms                   |                         |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| Grid/ Generator Input Data                       |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Input Current                               | 100Arms                   |                         |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                         |                         |                         |
| Load Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 100Arms                   |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| General Data                                     |                           |                         |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                         |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                         |                         |                         |
| Install Location                                 | Indoor use                |                         |                         |                         |
| Protection Class                                 | IP20                      |                         |                         |                         |

**7.0 Illustrations**

**Illustration 4t - Ratings**

| Model  | 51.2-100V24-SOL<br>12K2   | 51.2-100V25-SOL<br>12K2 | 51.2-100V26-SOL<br>12K2 | 51.2-100V27-SOL<br>12K2 |
|--|---------------------------|-------------------------|-------------------------|-------------------------|
| Battery type                                     | LiFePO4                   |                         |                         |                         |
| Total capacity                                   | 2400Ah                    | 2500Ah                  | 2600Ah                  | 2700Ah                  |
| Total energy                                     | 122.88kWh                 | 128kWh                  | 133.12kWh               | 138.24kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                         |                         |                         |
| Nominal voltage                                  | 51.2 Vdc                  |                         |                         |                         |
| Max. charge current                              | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Max. discharge current                           | 550 Adc                   | 550 Adc                 | 550 Adc                 | 550 Adc                 |
| Parallel Number                                  | 1S24P                     | 1S25P                   | 1S26P                   | 1S27P                   |
| PV Input data                                    |                           |                         |                         |                         |
| Max. input voltage                               | 500Vdc                    |                         |                         |                         |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                         |                         |                         |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                         |                         |                         |
| Max. input continuous current (dc)               | 26A+26A                   |                         |                         |                         |
| Max. short circuit current (dc)                  | 44A+44A                   |                         |                         |                         |
| Grid Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Nominal Output                                   | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 100Arms                   |                         |                         |                         |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| Grid/ Generator Input Data                       |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Input Current                               | 100Arms                   |                         |                         |                         |
| Max. Input short circuit current                 | 146A@rms for one inverter |                         |                         |                         |
| Load Output Data                                 |                           |                         |                         |                         |
| Rated power                                      | 24000W                    |                         |                         |                         |
| Rated Voltage                                    | 208V/240V(120Vac)         |                         |                         |                         |
| Rated Frequency                                  | 60Hz                      |                         |                         |                         |
| Max. Output Current                              | 100Arms                   |                         |                         |                         |
| Max. output overcurrent protection               | 200A for one inverter     |                         |                         |                         |
| Max output fault current and duration            | 146A@rms for one inverter |                         |                         |                         |
| General Data                                     |                           |                         |                         |                         |
| Charging Temperature Range                       | -5°C to 55°C              |                         |                         |                         |
| Discharging Temperature Range                    | -20°C to 55°C             |                         |                         |                         |
| Install Location                                 | Indoor use                |                         |                         |                         |
| Protection Class                                 | IP20                      |                         |                         |                         |

**7.0 Illustrations**

**Illustration 4u - Ratings**

|  |                           |
|--|---------------------------|
| Model  | 51.2-100V28-SOL 12K2      |
| Battery type                                     | LiFePO4                   |
| Total capacity                                   | 2800Ah                    |
| Total energy                                     | 143.36kWh                 |
| Battery voltage range                            | 44.8-57.6 Vdc             |
| Nominal voltage                                  | 51.2 Vdc                  |
| Max. charge current                              | 550 Adc                   |
| Max. discharge current                           | 550 Adc                   |
| Parallel Number                                  | 1S28P                     |
| <b>PV Input data</b>                             |                           |
| Max. input voltage                               | 500Vdc                    |
| Range of input operating voltage                 | 175Vdc-425Vdc             |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |
| Max. input continuous current (dc)               | 26A+26A                   |
| Max. short circuit current (dc)                  | 44A+44A                   |
| <b>Grid Output Data</b>                          |                           |
| Rated power                                      | 24000W                    |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 100Arms                   |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| <b>Grid/ Generator Input Data</b>                |                           |
| Rated power                                      | 24000W                    |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Input Current                               | 100Arms                   |
| Max. Input short circuit current                 | 146A@rms for one inverter |
| <b>Load Output Data</b>                          |                           |
| Rated power                                      | 24000W                    |
| Rated Voltage                                    | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 100Arms                   |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| <b>General Data</b>                              |                           |
| Charging Temperature Range                       | -5°C to 55°C              |
| Discharging Temperature Range                    | -20°C to 55°C             |
| Install Location                                 | Indoor use                |
| Protection Class                                 | IP20                      |

**7.0 Illustrations**

**Illustration 4v - Ratings**

| Model  | 51.2-100V2-SOL<br>9K1     | 51.2-100V3-SOL<br>9K1 | 51.2-100V4-SOL<br>9K1 | 51.2-100V5-SOL<br>9K1 |
|--|---------------------------|-----------------------|-----------------------|-----------------------|
| <b>Battery data</b>                              |                           |                       |                       |                       |
| Battery type                                     | LiFePO4                   |                       |                       |                       |
| Total capacity                                   | 200Ah                     | 300Ah                 | 400Ah                 | 500Ah                 |
| Total energy                                     | 10.24kWh                  | 15.36kWh              | 20.48kWh              | 25.6kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                       |                       |                       |
| Nominal voltage                                  | 51.2 Vdc                  |                       |                       |                       |
| Max. charge current                              | 140 Adc                   | 180 Adc               | 180 Adc               | 180 Adc               |
| Max. discharge current                           | 180 Adc                   | 180 Adc               | 180 Adc               | 180 Adc               |
| Parallel Number                                  | 1S2P                      | 1S3P                  | 1S4P                  | 1S5P                  |
| <b>PV Input data</b>                             |                           |                       |                       |                       |
| Max. input voltage                               | 500Vdc                    |                       |                       |                       |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                       |                       |                       |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                       |                       |                       |
| Max. input continuous current (dc)               | 26A+26A                   |                       |                       |                       |
| Max. short circuit current (dc)                  | 44A+44A                   |                       |                       |                       |
| <b>Grid Output Data</b>                          |                           |                       |                       |                       |
| Rated power                                      | 9000W                     |                       |                       |                       |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Output Current                              | 37.5Arms                  |                       |                       |                       |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                       |                       |                       |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                       |                       |
| <b>Grid/ Generator Input Data</b>                |                           |                       |                       |                       |
| Rated power                                      | 9000W                     |                       |                       |                       |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Input Current                               | 37.5Arms                  |                       |                       |                       |
| Max. Input short circuit current                 | 146A@rms for one inverter |                       |                       |                       |
| <b>Load Output Data</b>                          |                           |                       |                       |                       |
| Rated power                                      | 9000W                     |                       |                       |                       |
| Rated Voltage                                    | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Output Current                              | 37.5Arms                  |                       |                       |                       |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                       |                       |
| <b>General Data</b>                              |                           |                       |                       |                       |
| Charging Temperature Range                       | -5°C to 55°C              |                       |                       |                       |
| Discharging Temperature Range                    | -20°C to 55°C             |                       |                       |                       |
| Install Location                                 | Indoor use                |                       |                       |                       |
| Protection Class                                 | IP20                      |                       |                       |                       |

**7.0 Illustrations**

**Illustration 4w - Ratings**

| Model  | 51.2-100V6-SOL<br>9K1     | 51.2-100V7-SOL<br>9K1 | 51.2-100V8-SOL<br>9K1 | 51.2-100V9-SOL<br>9K1 |
|--|---------------------------|-----------------------|-----------------------|-----------------------|
| Battery data                                     |                           |                       |                       |                       |
| Battery type                                     | LiFePO4                   |                       |                       |                       |
| Total capacity                                   | 600Ah                     | 700Ah                 | 800Ah                 | 900Ah                 |
| Total energy                                     | 30.72kWh                  | 35.84kWh              | 40.96kWh              | 46.08kWh              |
| Battery voltage range                            | 44.8-57.6 Vdc             |                       |                       |                       |
| Nominal voltage                                  | 51.2 Vdc                  |                       |                       |                       |
| Max. charge current                              | 180 Adc                   | 180 Adc               | 180 Adc               | 180 Adc               |
| Max. discharge current                           | 180 Adc                   | 180 Adc               | 180 Adc               | 180 Adc               |
| Parallel Number                                  | 1S6P                      | 1S7P                  | 1S8P                  | 1S9P                  |
| PV Input data                                    |                           |                       |                       |                       |
| Max. input voltage                               | 500Vdc                    |                       |                       |                       |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                       |                       |                       |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                       |                       |                       |
| Max. input continuous current (dc)               | 26A+26A                   |                       |                       |                       |
| Max. short circuit current (dc)                  | 44A+44A                   |                       |                       |                       |
| Grid Output Data                                 |                           |                       |                       |                       |
| Rated power                                      | 9000W                     |                       |                       |                       |
| Nominal Output                                   | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Output Current                              | 37.5Arms                  |                       |                       |                       |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                       |                       |                       |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                       |                       |
| Grid/ Generator Input Data                       |                           |                       |                       |                       |
| Rated power                                      | 9000W                     |                       |                       |                       |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Input Current                               | 37.5Arms                  |                       |                       |                       |
| Max. Input short circuit current                 | 146A@rms for one inverter |                       |                       |                       |
| Load Output Data                                 |                           |                       |                       |                       |
| Rated power                                      | 9000W                     |                       |                       |                       |
| Rated Voltage                                    | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Output Current                              | 37.5Arms                  |                       |                       |                       |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                       |                       |
| General Data                                     |                           |                       |                       |                       |
| Charging Temperature Range                       | -5°C to 55°C              |                       |                       |                       |
| Discharging Temperature Range                    | -20°C to 55°C             |                       |                       |                       |
| Install Location                                 | Indoor use                |                       |                       |                       |
| Protection Class                                 | IP20                      |                       |                       |                       |

**7.0 Illustrations**

**Illustration 4x - Ratings**

| Model  | 51.2-100V10-SOL<br>9K1    | 51.2-100V11-SOL<br>9K1 | 51.2-100V12-SOL<br>9K1 | 51.2-100V13-SOL<br>9K1 |
|--|---------------------------|------------------------|------------------------|------------------------|
| <b>Battery data</b>                              |                           |                        |                        |                        |
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 1000Ah                    | 1100Ah                 | 1200Ah                 | 1300Ah                 |
| Total energy                                     | 51.2kWh                   | 56.32kWh               | 61.44kWh               | 66.56kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 180 Adc                   | 180 Adc                | 180 Adc                | 180 Adc                |
| Max. discharge current                           | 180 Adc                   | 180 Adc                | 180 Adc                | 180 Adc                |
| Parallel Number                                  | 1S10P                     | 1S11P                  | 1S12P                  | 1S13P                  |
| <b>PV Input data</b>                             |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| <b>Grid Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 9000W                     |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 37.5Arms                  |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>Grid/ Generator Input Data</b>                |                           |                        |                        |                        |
| Rated power                                      | 9000W                     |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 37.5Arms                  |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| <b>Load Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 9000W                     |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 37.5Arms                  |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>General Data</b>                              |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4y - Ratings**

|  |                           |
|--|---------------------------|
| Model  | 51.2-100V14-SOL 9K1       |
| Battery data                                     |                           |
| Battery type                                     | LiFePO4                   |
| Total capacity                                   | 1400Ah                    |
| Total energy                                     | 71.68kWh                  |
| Battery voltage range                            | 44.8-57.6 Vdc             |
| Nominal voltage                                  | 51.2 Vdc                  |
| Max. charge current                              | 180 Adc                   |
| Max. discharge current                           | 180 Adc                   |
| Parallel Number                                  | 1S14P                     |
| PV Input data                                    |                           |
| Max. input voltage                               | 500Vdc                    |
| Range of input operating voltage                 | 175Vdc-425Vdc             |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |
| Max. input continuous current (dc)               | 26A+26A                   |
| Max. short circuit current (dc)                  | 44A+44A                   |
| Grid Output Data                                 |                           |
| Rated power                                      | 9000W                     |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 37.5Arms                  |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| Grid/ Generator Input Data                       |                           |
| Rated power                                      | 9000W                     |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Input Current                               | 37.5Arms                  |
| Max. Input short circuit current                 | 146A@rms for one inverter |
| Load Output Data                                 |                           |
| Rated power                                      | 9000W                     |
| Rated Voltage                                    | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 37.5Arms                  |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| General Data                                     |                           |
| Charging Temperature Range                       | -5°C to 55°C              |
| Discharging Temperature Range                    | -20°C to 55°C             |
| Install Location                                 | Indoor use                |
| Protection Class                                 | IP20                      |

**7.0 Illustrations**

**Illustration 4z - Ratings**

| Model  | 51.2-100V4-SOL<br>9K2     | 51.2-100V5-SOL<br>9K2 | 51.2-100V6-SOL<br>9K2 | 51.2-100V7-SOL<br>9K2 |
|--|---------------------------|-----------------------|-----------------------|-----------------------|
| <b>Battery data</b>                              |                           |                       |                       |                       |
| Battery type                                     | LiFePO4                   |                       |                       |                       |
| Total capacity                                   | 400Ah                     | 500Ah                 | 600Ah                 | 700Ah                 |
| Total energy                                     | 20.48kWh                  | 25.6kWh               | 30.72kWh              | 35.84kWh              |
| Battery voltage range                            | 44.8-57.6 Vdc             |                       |                       |                       |
| Nominal voltage                                  | 51.2 Vdc                  |                       |                       |                       |
| Max. charge current                              | 280 Adc                   | 350 Adc               | 360 Adc               | 360 Adc               |
| Max. discharge current                           | 360 Adc                   | 360 Adc               | 360 Adc               | 360 Adc               |
| Parallel Number                                  | 1S4P                      | 1S5P                  | 1S6P                  | 1S7P                  |
| <b>PV Input data</b>                             |                           |                       |                       |                       |
| Max. input voltage                               | 500Vdc                    |                       |                       |                       |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                       |                       |                       |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                       |                       |                       |
| Max. input continuous current (dc)               | 26A+26A                   |                       |                       |                       |
| Max. short circuit current (dc)                  | 44A+44A                   |                       |                       |                       |
| <b>Grid Output Data</b>                          |                           |                       |                       |                       |
| Rated power                                      | 18000W                    |                       |                       |                       |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Output Current                              | 75Arms                    |                       |                       |                       |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                       |                       |                       |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                       |                       |
| <b>Grid/ Generator Input Data</b>                |                           |                       |                       |                       |
| Rated power                                      | 18000W                    |                       |                       |                       |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Input Current                               | 75Arms                    |                       |                       |                       |
| Max. Input short circuit current                 | 146A@rms for one inverter |                       |                       |                       |
| <b>Load Output Data</b>                          |                           |                       |                       |                       |
| Rated power                                      | 18000W                    |                       |                       |                       |
| Rated Voltage                                    | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Output Current                              | 75Arms                    |                       |                       |                       |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                       |                       |
| <b>General Data</b>                              |                           |                       |                       |                       |
| Charging Temperature Range                       | -5°C to 55°C              |                       |                       |                       |
| Discharging Temperature Range                    | -20°C to 55°C             |                       |                       |                       |
| Install Location                                 | Indoor use                |                       |                       |                       |
| Protection Class                                 | IP20                      |                       |                       |                       |

**7.0 Illustrations**

**Illustration 4ba - Ratings**

| Model  | 51.2-100V8-SOL<br>9K2     | 51.2-100V9-SOL<br>9K2 | 51.2-100V10-SOL<br>9K2 | 51.2-100V11-SOL<br>9K2 |
|--|---------------------------|-----------------------|------------------------|------------------------|
| Battery type                                     | LiFePO4                   |                       |                        |                        |
| Total capacity                                   | 800Ah                     | 900Ah                 | 1000Ah                 | 1100Ah                 |
| Total energy                                     | 40.96kWh                  | 46.08kWh              | 51.2kWh                | 56.32kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                       |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                       |                        |                        |
| Max. charge current                              | 360 Adc                   | 360 Adc               | 360 Adc                | 360 Adc                |
| Max. discharge current                           | 360 Adc                   | 360 Adc               | 360 Adc                | 360 Adc                |
| Parallel Number                                  | 1S8P                      | 1S9P                  | 1S10P                  | 1S11P                  |
| PV Input data                                    |                           |                       |                        |                        |
| Max. input voltage                               | 500Vdc                    |                       |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                       |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                       |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                       |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                       |                        |                        |
| Grid Output Data                                 |                           |                       |                        |                        |
| Rated power                                      | 18000W                    |                       |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                       |                        |                        |
| Rated Frequency                                  | 60Hz                      |                       |                        |                        |
| Max. Output Current                              | 75Arms                    |                       |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                       |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                        |                        |
| Grid/ Generator Input Data                       |                           |                       |                        |                        |
| Rated power                                      | 18000W                    |                       |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                       |                        |                        |
| Rated Frequency                                  | 60Hz                      |                       |                        |                        |
| Max. Input Current                               | 75Arms                    |                       |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                       |                        |                        |
| Load Output Data                                 |                           |                       |                        |                        |
| Rated power                                      | 18000W                    |                       |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                       |                        |                        |
| Rated Frequency                                  | 60Hz                      |                       |                        |                        |
| Max. Output Current                              | 75Arms                    |                       |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                        |                        |
| General Data                                     |                           |                       |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                       |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                       |                        |                        |
| Install Location                                 | Indoor use                |                       |                        |                        |
| Protection Class                                 | IP20                      |                       |                        |                        |

**7.0 Illustrations**

**Illustration 4bb - Ratings**

| Model  | 51.2-100V12-SOL<br>9K2    | 51.2-100V13-SOL<br>9K2 | 51.2-100V14-SOL<br>9K2 | 51.2-100V15-SOL<br>9K2 |
|--|---------------------------|------------------------|------------------------|------------------------|
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 1200Ah                    | 1300Ah                 | 1400Ah                 | 1500Ah                 |
| Total energy                                     | 61.44kWh                  | 66.56kWh               | 71.68kWh               | 76.8kWh                |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Max. discharge current                           | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Parallel Number                                  | 1S12P                     | 1S13P                  | 1S14P                  | 1S15P                  |
| PV Input data                                    |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| Grid Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 75Arms                    |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| Grid/ Generator Input Data                       |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 75Arms                    |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| Load Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 75Arms                    |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| General Data                                     |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4bc - Ratings**

| Model  | 51.2-100V16-SOL<br>9K2    | 51.2-100V17-SOL<br>9K2 | 51.2-100V18-SOL<br>9K2 | 51.2-100V19-SOL<br>9K2 |
|--|---------------------------|------------------------|------------------------|------------------------|
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 1600Ah                    | 1700Ah                 | 1800Ah                 | 1900Ah                 |
| Total energy                                     | 81.92kWh                  | 87.04kWh               | 92.16kWh               | 97.28kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Max. discharge current                           | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Parallel Number                                  | 1S16P                     | 1S17P                  | 1S18P                  | 1S19P                  |
| PV Input data                                    |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| Grid Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 75Arms                    |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| Grid/ Generator Input Data                       |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 75Arms                    |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| Load Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 75Arms                    |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| General Data                                     |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4bd - Ratings**

| Model  | 51.2-100V20-SOL<br>9K2    | 51.2-100V21-SOL<br>9K2 | 51.2-100V22-SOL<br>9K2 | 51.2-100V23-SOL<br>9K2 |
|--|---------------------------|------------------------|------------------------|------------------------|
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 2000Ah                    | 2100Ah                 | 2200Ah                 | 2300Ah                 |
| Total energy                                     | 102.4kWh                  | 107.52kWh              | 112.64kWh              | 117.76kWh              |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Max. discharge current                           | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Parallel Number                                  | 1S20P                     | 1S21P                  | 1S22P                  | 1S23P                  |
| PV Input data                                    |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| Grid Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 75Arms                    |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| Grid/ Generator Input Data                       |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 75Arms                    |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| Load Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 75Arms                    |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| General Data                                     |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4be - Ratings**

| Model  | 51.2-100V24-SOL<br>9K2    | 51.2-100V25-SOL<br>9K2 | 51.2-100V26-SOL<br>9K2 | 51.2-100V27-SOL<br>9K2 |
|--|---------------------------|------------------------|------------------------|------------------------|
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 2400Ah                    | 2500Ah                 | 2600Ah                 | 2700Ah                 |
| Total energy                                     | 122.88kWh                 | 128kWh                 | 133.9kWh               | 138.24kWh              |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Max. discharge current                           | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Parallel Number                                  | 1S24P                     | 1S25P                  | 1S26P                  | 1S27P                  |
| PV Input data                                    |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| Grid Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 75Arms                    |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| Grid/ Generator Input Data                       |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 75Arms                    |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| Load Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 18000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 75Arms                    |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| General Data                                     |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4bf - Ratings**

|  |                           |
|--|---------------------------|
| Model  | 51.2-100V28-SOL 9K2       |
| Battery type                                     | LiFePO4                   |
| Total capacity                                   | 2800Ah                    |
| Total energy                                     | 143.36kWh                 |
| Battery voltage range                            | 44.8-57.6 Vdc             |
| Nominal voltage                                  | 51.2 Vdc                  |
| Max. charge current                              | 360 Adc                   |
| Max. discharge current                           | 360 Adc                   |
| Parallel Number                                  | 1S28P                     |
| PV Input data                                    |                           |
| Max. input voltage                               | 500Vdc                    |
| Range of input operating voltage                 | 175Vdc-425Vdc             |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |
| Max. input continuous current (dc)               | 26A+26A                   |
| Max. short circuit current (dc)                  | 44A+44A                   |
| Grid Output Data                                 |                           |
| Rated power                                      | 18000W                    |
| Nominal Output                                   | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 75Arms                    |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| Grid/ Generator Input Data                       |                           |
| Rated power                                      | 18000W                    |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Input Current                               | 75Arms                    |
| Max. Input short circuit current                 | 146A@rms for one inverter |
| Load Output Data                                 |                           |
| Rated power                                      | 18000W                    |
| Rated Voltage                                    | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 75Arms                    |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| General Data                                     |                           |
| Charging Temperature Range                       | -5°C to 55°C              |
| Discharging Temperature Range                    | -20°C to 55°C             |
| Install Location                                 | Indoor use                |
| Protection Class                                 | IP20                      |

**7.0 Illustrations**

**Illustration 4bg - Ratings**

| Model  | 51.2-100V2-SOL<br>8K1     | 51.2-100V3-SOL<br>8K1 | 51.2-100V4-SOL<br>8K1 | 51.2-100V5-SOL<br>8K1 |
|--|---------------------------|-----------------------|-----------------------|-----------------------|
| <b>Battery data</b>                              |                           |                       |                       |                       |
| Battery type                                     | LiFePO4                   |                       |                       |                       |
| Total capacity                                   | 200Ah                     | 300Ah                 | 400Ah                 | 500Ah                 |
| Total energy                                     | 10.24kWh                  | 15.36kWh              | 20.48kWh              | 25.6kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                       |                       |                       |
| Nominal voltage                                  | 51.2 Vdc                  |                       |                       |                       |
| Max. charge current                              | 140 Adc                   | 180 Adc               | 180 Adc               | 180 Adc               |
| Max. discharge current                           | 180 Adc                   | 180 Adc               | 180 Adc               | 180 Adc               |
| Parallel Number                                  | 1S2P                      | 1S3P                  | 1S4P                  | 1S5P                  |
| <b>PV Input data</b>                             |                           |                       |                       |                       |
| Max. input voltage                               | 500Vdc                    |                       |                       |                       |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                       |                       |                       |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                       |                       |                       |
| Max. input continuous current (dc)               | 26A+26A                   |                       |                       |                       |
| Max. short circuit current (dc)                  | 44A+44A                   |                       |                       |                       |
| <b>Grid Output Data</b>                          |                           |                       |                       |                       |
| Rated power                                      | 8000W                     |                       |                       |                       |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Output Current                              | 33.3Arms                  |                       |                       |                       |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                       |                       |                       |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                       |                       |
| <b>Grid/ Generator Input Data</b>                |                           |                       |                       |                       |
| Rated power                                      | 8000W                     |                       |                       |                       |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Input Current                               | 33.3Arms                  |                       |                       |                       |
| Max. Input short circuit current                 | 146A@rms for one inverter |                       |                       |                       |
| <b>Load Output Data</b>                          |                           |                       |                       |                       |
| Rated power                                      | 8000W                     |                       |                       |                       |
| Rated Voltage                                    | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Output Current                              | 33.3Arms                  |                       |                       |                       |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                       |                       |
| <b>General Data</b>                              |                           |                       |                       |                       |
| Charging Temperature Range                       | -5°C to 55°C              |                       |                       |                       |
| Discharging Temperature Range                    | -20°C to 55°C             |                       |                       |                       |
| Install Location                                 | Indoor use                |                       |                       |                       |
| Protection Class                                 | IP20                      |                       |                       |                       |

**7.0 Illustrations**

**Illustration 4bh - Ratings**

| Model  | 51.2-100V6-SOL<br>8K1     | 51.2-100V7-SOL<br>8K1 | 51.2-100V8-SOL<br>8K1 | 51.2-100V9-SOL<br>8K1 |
|--|---------------------------|-----------------------|-----------------------|-----------------------|
| <b>Battery data</b>                              |                           |                       |                       |                       |
| Battery type                                     | LiFePO4                   |                       |                       |                       |
| Total capacity                                   | 600Ah                     | 700Ah                 | 800Ah                 | 900Ah                 |
| Total energy                                     | 30.72kWh                  | 35.84kWh              | 40.96kWh              | 46.08kWh              |
| Battery voltage range                            | 44.8-57.6 Vdc             |                       |                       |                       |
| Nominal voltage                                  | 51.2 Vdc                  |                       |                       |                       |
| Max. charge current                              | 180 Adc                   | 180 Adc               | 180 Adc               | 180 Adc               |
| Max. discharge current                           | 180 Adc                   | 180 Adc               | 180 Adc               | 180 Adc               |
| Parallel Number                                  | 1S6P                      | 1S7P                  | 1S8P                  | 1S9P                  |
| <b>PV Input data</b>                             |                           |                       |                       |                       |
| Max. input voltage                               | 500Vdc                    |                       |                       |                       |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                       |                       |                       |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                       |                       |                       |
| Max. input continuous current (dc)               | 26A+26A                   |                       |                       |                       |
| Max. short circuit current (dc)                  | 44A+44A                   |                       |                       |                       |
| <b>Grid Output Data</b>                          |                           |                       |                       |                       |
| Rated power                                      | 8000W                     |                       |                       |                       |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Output Current                              | 33.3Arms                  |                       |                       |                       |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                       |                       |                       |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                       |                       |
| <b>Grid/ Generator Input Data</b>                |                           |                       |                       |                       |
| Rated power                                      | 8000W                     |                       |                       |                       |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Input Current                               | 33.3Arms                  |                       |                       |                       |
| Max. Input short circuit current                 | 146A@rms for one inverter |                       |                       |                       |
| <b>Load Output Data</b>                          |                           |                       |                       |                       |
| Rated power                                      | 8000W                     |                       |                       |                       |
| Rated Voltage                                    | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                                  | 60Hz                      |                       |                       |                       |
| Max. Output Current                              | 33.3Arms                  |                       |                       |                       |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                       |                       |
| <b>General Data</b>                              |                           |                       |                       |                       |
| Charging Temperature Range                       | -5°C to 55°C              |                       |                       |                       |
| Discharging Temperature Range                    | -20°C to 55°C             |                       |                       |                       |
| Install Location                                 | Indoor use                |                       |                       |                       |
| Protection Class                                 | IP20                      |                       |                       |                       |

**7.0 Illustrations**

**Illustration 4bi - Ratings**

| Model  | 51.2-100V10-SOL<br>8K1    | 51.2-100V11-SOL<br>8K1 | 51.2-100V12-SOL<br>8K1 | 51.2-100V13-SOL<br>8K1 |
|--|---------------------------|------------------------|------------------------|------------------------|
| <b>Battery data</b>                              |                           |                        |                        |                        |
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 1000Ah                    | 1100Ah                 | 1200Ah                 | 1300Ah                 |
| Total energy                                     | 51.2kWh                   | 56.32kWh               | 61.44kWh               | 66.56kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 180 Adc                   | 180 Adc                | 180 Adc                | 180 Adc                |
| Max. discharge current                           | 180 Adc                   | 180 Adc                | 180 Adc                | 180 Adc                |
| Parallel Number                                  | 1S10P                     | 1S11P                  | 1S12P                  | 1S13P                  |
| <b>PV Input data</b>                             |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| <b>Grid Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 8000W                     |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 33.3Arms                  |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>Grid/ Generator Input Data</b>                |                           |                        |                        |                        |
| Rated power                                      | 8000W                     |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 33.3Arms                  |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| <b>Load Output Data</b>                          |                           |                        |                        |                        |
| Rated power                                      | 8000W                     |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 33.3Arms                  |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| <b>General Data</b>                              |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4bj - Ratings**

|  |                           |
|--|---------------------------|
| Model  | 51.2-100V14-SOL 8K1       |
| Battery data                                     |                           |
| Battery type                                     | LiFePO4                   |
| Total capacity                                   | 1400Ah                    |
| Total energy                                     | 71.68kWh                  |
| Battery voltage range                            | 44.8-57.6 Vdc             |
| Nominal voltage                                  | 51.2 Vdc                  |
| Max. charge current                              | 180 Adc                   |
| Max. discharge current                           | 180 Adc                   |
| Parallel Number                                  | 1S14P                     |
| PV Input data                                    |                           |
| Max. input voltage                               | 500Vdc                    |
| Range of input operating voltage                 | 175Vdc-425Vdc             |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |
| Max. input continuous current (dc)               | 26A+26A                   |
| Max. short circuit current (dc)                  | 44A+44A                   |
| Grid Output Data                                 |                           |
| Rated power                                      | 8000W                     |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 33.3Arms                  |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| Grid/ Generator Input Data                       |                           |
| Rated power                                      | 8000W                     |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Input Current                               | 33.3Arms                  |
| Max. Input short circuit current                 | 146A@rms for one inverter |
| Load Output Data                                 |                           |
| Rated power                                      | 8000W                     |
| Rated Voltage                                    | 208V/240V(120Vac)         |
| Rated Frequency                                  | 60Hz                      |
| Max. Output Current                              | 33.3Arms                  |
| Max. output overcurrent protection               | 200A for one inverter     |
| Max output fault current and duration            | 146A@rms for one inverter |
| General Data                                     |                           |
| Charging Temperature Range                       | -5°C to 55°C              |
| Discharging Temperature Range                    | -20°C to 55°C             |
| Install Location                                 | Indoor use                |
| Protection Class                                 | IP20                      |

**7.0 Illustrations**

**Illustration 4bk - Ratings**

| Model                                 | 51.2-100V4-SOL<br>8K2     | 51.2-100V5-SOL<br>8K2 | 51.2-100V6-SOL<br>8K2 | 51.2-100V7-SOL<br>8K2 |
|---------------------------------------|---------------------------|-----------------------|-----------------------|-----------------------|
| <b>Battery data</b>                   |                           |                       |                       |                       |
| Battery type                          | LiFePO4                   |                       |                       |                       |
| Total capacity                        | 400Ah                     | 500Ah                 | 600Ah                 | 700Ah                 |
| Total energy                          | 20.48kWh                  | 25.6kWh               | 30.72kWh              | 35.84kWh              |
| Battery voltage range                 | 44.8-57.6 Vdc             |                       |                       |                       |
| Nominal voltage                       | 51.2 Vdc                  |                       |                       |                       |
| Max. charge current                   | 280 Adc                   | 350 Adc               | 360 Adc               | 360 Adc               |
| Max. discharge current                | 360 Adc                   | 360 Adc               | 360 Adc               | 360 Adc               |
| Parallel Number                       | 1S4P                      | 1S5P                  | 1S6P                  | 1S7P                  |
| <b>PV Input data</b>                  |                           |                       |                       |                       |
| Max. input voltage                    | 500Vdc                    |                       |                       |                       |
| Range of input operating voltage      | 175Vdc-425Vdc             |                       |                       |                       |
| Range of input operating voltage with | 250Vdc-425Vdc             |                       |                       |                       |
| Max. input continuous current (dc)    | 26A+26A                   |                       |                       |                       |
| Max. short circuit current (dc)       | 44A+44A                   |                       |                       |                       |
| <b>Grid Output Data</b>               |                           |                       |                       |                       |
| Rated power                           | 16000W                    |                       |                       |                       |
| Nominal Output Voltage                | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                       | 60Hz                      |                       |                       |                       |
| Max. Output Current                   | 66.6Arms                  |                       |                       |                       |
| Adjustable Power Factor               | 0.9 Leading ~ 0.9 Lagging |                       |                       |                       |
| Max. output overcurrent protection    | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration | 146A@rms for one inverter |                       |                       |                       |
| <b>Grid/ Generator Input Data</b>     |                           |                       |                       |                       |
| Rated power                           | 16000W                    |                       |                       |                       |
| Nominal Input Voltage                 | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                       | 60Hz                      |                       |                       |                       |
| Max. Input Current                    | 66.6Arms                  |                       |                       |                       |
| Max. Input short circuit current      | 146A@rms for one inverter |                       |                       |                       |
| <b>Load Output Data</b>               |                           |                       |                       |                       |
| Rated power                           | 16000W                    |                       |                       |                       |
| Rated Voltage                         | 208V/240V(120Vac)         |                       |                       |                       |
| Rated Frequency                       | 60Hz                      |                       |                       |                       |
| Max. Output Current                   | 66.6Arms                  |                       |                       |                       |
| Max. output overcurrent protection    | 200A for one inverter     |                       |                       |                       |
| Max output fault current and duration | 146A@rms for one inverter |                       |                       |                       |
| <b>General Data</b>                   |                           |                       |                       |                       |
| Charging Temperature Range            | -5°C to 55°C              |                       |                       |                       |
| Discharging Temperature Range         | -20°C to 55°C             |                       |                       |                       |
| Install Location                      | Indoor use                |                       |                       |                       |
| Protection Class                      | IP20                      |                       |                       |                       |

**7.0 Illustrations**

**Illustration 4b1 - Ratings**

| Model  | 51.2-100V8-SOL<br>8K2     | 51.2-100V9-SOL<br>8K2 | 51.2-100V10-SOL<br>8K2 | 51.2-100V11-SOL<br>8K2 |
|--|---------------------------|-----------------------|------------------------|------------------------|
| Battery type                                     | LiFePO4                   |                       |                        |                        |
| Total capacity                                   | 800Ah                     | 900Ah                 | 1000Ah                 | 1100Ah                 |
| Total energy                                     | 40.96kWh                  | 46.08kWh              | 51.2kWh                | 56.32kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                       |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                       |                        |                        |
| Max. charge current                              | 360 Adc                   | 360 Adc               | 360 Adc                | 360 Adc                |
| Max. discharge current                           | 360 Adc                   | 360 Adc               | 360 Adc                | 360 Adc                |
| Parallel Number                                  | 1S8P                      | 1S9P                  | 1S10P                  | 1S11P                  |
| PV Input data                                    |                           |                       |                        |                        |
| Max. input voltage                               | 500Vdc                    |                       |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                       |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                       |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                       |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                       |                        |                        |
| Grid Output Data                                 |                           |                       |                        |                        |
| Rated power                                      | 16000W                    |                       |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                       |                        |                        |
| Rated Frequency                                  | 60Hz                      |                       |                        |                        |
| Max. Output Current                              | 66.6Arms                  |                       |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                       |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                        |                        |
| Grid/ Generator Input Data                       |                           |                       |                        |                        |
| Rated power                                      | 16000W                    |                       |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                       |                        |                        |
| Rated Frequency                                  | 60Hz                      |                       |                        |                        |
| Max. Input Current                               | 66.6Arms                  |                       |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                       |                        |                        |
| Load Output Data                                 |                           |                       |                        |                        |
| Rated power                                      | 16000W                    |                       |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                       |                        |                        |
| Rated Frequency                                  | 60Hz                      |                       |                        |                        |
| Max. Output Current                              | 66.6Arms                  |                       |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                       |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                       |                        |                        |
| General Data                                     |                           |                       |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                       |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                       |                        |                        |
| Install Location                                 | Indoor use                |                       |                        |                        |
| Protection Class                                 | IP20                      |                       |                        |                        |

**7.0 Illustrations**

**Illustration 4bm - Ratings**

| Model  | 51.2-100V12-SOL<br>8K2    | 51.2-100V13-SOL<br>8K2 | 51.2-100V14-SOL<br>8K2 | 51.2-100V15-SOL<br>8K2 |
|--|---------------------------|------------------------|------------------------|------------------------|
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 1200Ah                    | 1300Ah                 | 1400Ah                 | 1500Ah                 |
| Total energy                                     | 61.44kWh                  | 66.56kWh               | 71.68kWh               | 76.8kWh                |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Max. discharge current                           | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Parallel Number                                  | 1S12P                     | 1S13P                  | 1S14P                  | 1S15P                  |
| PV Input data                                    |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| Grid Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 66.6Arms                  |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| Grid/ Generator Input Data                       |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 66.6Arms                  |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| Load Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 66.6Arms                  |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| General Data                                     |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4bn - Ratings**

| Model  | 51.2-100V16-SOL<br>8K2    | 51.2-100V17-SOL<br>8K2 | 51.2-100V18-SOL<br>8K2 | 51.2-100V19-SOL<br>8K2 |
|--|---------------------------|------------------------|------------------------|------------------------|
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 1600Ah                    | 1700Ah                 | 1800Ah                 | 1900Ah                 |
| Total energy                                     | 81.92kWh                  | 87.04kWh               | 92.16kWh               | 97.28kWh               |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Max. discharge current                           | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Parallel Number                                  | 1S16P                     | 1S17P                  | 1S18P                  | 1S19P                  |
| PV Input data                                    |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| Grid Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 66.6Arms                  |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| Grid/ Generator Input Data                       |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 66.6Arms                  |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| Load Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 66.6Arms                  |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| General Data                                     |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4bo - Ratings**

| Model  | 51.2-100V20-SOL<br>8K2    | 51.2-100V21-SOL<br>8K2 | 51.2-100V22-SOL<br>8K2 | 51.2-100V23-SOL<br>8K2 |
|--|---------------------------|------------------------|------------------------|------------------------|
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 2000Ah                    | 2100Ah                 | 2200Ah                 | 2300Ah                 |
| Total energy                                     | 102.4kWh                  | 107.52kWh              | 112.64kWh              | 117.76kWh              |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Max. discharge current                           | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Parallel Number                                  | 1S20P                     | 1S21P                  | 1S22P                  | 1S23P                  |
| PV Input data                                    |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| Grid Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 66.6Arms                  |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| Grid/ Generator Input Data                       |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 66.6Arms                  |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| Load Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 66.6Arms                  |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| General Data                                     |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4bp - Ratings**

| Model  | 51.2-100V24-SOL<br>8K2    | 51.2-100V25-SOL<br>8K2 | 51.2-100V26-SOL<br>8K2 | 51.2-100V27-SOL<br>8K2 |
|--|---------------------------|------------------------|------------------------|------------------------|
| Battery type                                     | LiFePO4                   |                        |                        |                        |
| Total capacity                                   | 2400Ah                    | 2500Ah                 | 2600Ah                 | 2700Ah                 |
| Total energy                                     | 122.88kWh                 | 128kWh                 | 133.8kWh               | 138.24kWh              |
| Battery voltage range                            | 44.8-57.6 Vdc             |                        |                        |                        |
| Nominal voltage                                  | 51.2 Vdc                  |                        |                        |                        |
| Max. charge current                              | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Max. discharge current                           | 360 Adc                   | 360 Adc                | 360 Adc                | 360 Adc                |
| Parallel Number                                  | 1S24P                     | 1S25P                  | 1S26P                  | 1S27P                  |
| PV Input data                                    |                           |                        |                        |                        |
| Max. input voltage                               | 500Vdc                    |                        |                        |                        |
| Range of input operating voltage                 | 175Vdc-425Vdc             |                        |                        |                        |
| Range of input operating voltage with full power | 250Vdc-425Vdc             |                        |                        |                        |
| Max. input continuous current (dc)               | 26A+26A                   |                        |                        |                        |
| Max. short circuit current (dc)                  | 44A+44A                   |                        |                        |                        |
| Grid Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Nominal Output Voltage                           | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 66.6Arms                  |                        |                        |                        |
| Adjustable Power Factor                          | 0.9 Leading ~ 0.9 Lagging |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| Grid/ Generator Input Data                       |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Nominal Input Voltage                            | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Input Current                               | 66.6Arms                  |                        |                        |                        |
| Max. Input short circuit current                 | 146A@rms for one inverter |                        |                        |                        |
| Load Output Data                                 |                           |                        |                        |                        |
| Rated power                                      | 16000W                    |                        |                        |                        |
| Rated Voltage                                    | 208V/240V(120Vac)         |                        |                        |                        |
| Rated Frequency                                  | 60Hz                      |                        |                        |                        |
| Max. Output Current                              | 66.6Arms                  |                        |                        |                        |
| Max. output overcurrent protection               | 200A for one inverter     |                        |                        |                        |
| Max output fault current and duration            | 146A@rms for one inverter |                        |                        |                        |
| General Data                                     |                           |                        |                        |                        |
| Charging Temperature Range                       | -5°C to 55°C              |                        |                        |                        |
| Discharging Temperature Range                    | -20°C to 55°C             |                        |                        |                        |
| Install Location                                 | Indoor use                |                        |                        |                        |
| Protection Class                                 | IP20                      |                        |                        |                        |

**7.0 Illustrations**

**Illustration 4bq - Ratings**

|                                       |                           |
|---------------------------------------|---------------------------|
| Model                                 | 51.2-100V28-SOL 8K2       |
| Battery type                          | LiFePO4                   |
| Total capacity                        | 2800Ah                    |
| Total energy                          | 143.36kWh                 |
| Battery voltage range                 | 44.8-57.6 Vdc             |
| Nominal voltage                       | 51.2 Vdc                  |
| Max. charge current                   | 360 Adc                   |
| Max. discharge current                | 360 Adc                   |
| Parallel Number                       | 1S28P                     |
| <b>PV Input data</b>                  |                           |
| Max. input voltage                    | 500Vdc                    |
| Range of input operating voltage      | 175Vdc-425Vdc             |
| Range of input operating voltage with | 250Vdc-425Vdc             |
| Max. input continuous current (dc)    | 26A+26A                   |
| Max. short circuit current (dc)       | 44A+44A                   |
| <b>Grid Output Data</b>               |                           |
| Rated power                           | 16000W                    |
| Nominal Output Voltage                | 208V/240V(120Vac)         |
| Rated Frequency                       | 60Hz                      |
| Max. Output Current                   | 66.6Arms                  |
| Adjustable Power Factor               | 0.9 Leading ~ 0.9 Lagging |
| Max. output overcurrent protection    | 200A for one inverter     |
| Max output fault current and duration | 146A@rms for one inverter |
| <b>Grid/ Generator Input Data</b>     |                           |
| Rated power                           | 16000W                    |
| Nominal Input Voltage                 | 208V/240V(120Vac)         |
| Rated Frequency                       | 60Hz                      |
| Max. Input Current                    | 66.6Arms                  |
| Max. Input short circuit current      | 146A@rms for one inverter |
| <b>Load Output Data</b>               |                           |
| Rated power                           | 16000W                    |
| Rated Voltage                         | 208V/240V(120Vac)         |
| Rated Frequency                       | 60Hz                      |
| Max. Output Current                   | 66.6Arms                  |
| Max. output overcurrent protection    | 200A for one inverter     |
| Max output fault current and duration | 146A@rms for one inverter |
| <b>General Data</b>                   |                           |
| Charging Temperature Range            | -5°C to 55°C              |
| Discharging Temperature Range         | -20°C to 55°C             |
| Install Location                      | Indoor use                |
| Protection Class                      | IP20                      |

| 8.0 Test Summary  |  |  |   |
|---|--|--|---|
| Evaluation Period   | 29-Feb-2024 to 10-Aug-2024   |  | Project No. 240229127GZU                      |
| Sample Rec. Date  | 29-Feb-2024  | Condition                              | Prototype                                     |
|   |  |  | Sample ID. S240229127-001, S240229127-005~008 |
| Test Location   | Intertek Testing Services Shenzhen Ltd. Guangzhou Branch<br>Room 101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road,<br>HuangpuDistrict Guangzhou, Guangdong, China |  |   |
| Test Procedure  | Testing Lab  |  |   |
| Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria. |  |  |   |
| The following tests were performed:   |  |  |   |
| Test Description  |  | [ANSI/CAN/UL 9540:2023 Ed.3]<br>Clause |   |
| Normal Operations Test  |  | 30                                     |   |
| Dielectric Voltage Withstand Test   |  | 32                                     |   |
| Impulse Test  |  | 33                                     |   |
| Equipment Grounding and Bonding Test  |  | 34                                     |   |
| Insulation Resistance Test  |  | 35                                     |   |
| Electromagnetic Immunity Tests  |  | 36                                     |   |

| 8.1 Signatures   |                 |              |                  |
|--|-----------------|--------------|------------------|
| A representative sample of the product covered by this report has been evaluated and found to comply with the applicable requirements of the standards indicated in Section 1.0. |                 |              |                  |
| Completed by:  | Qifa Lai        | Reviewed by: | Mira Xiao        |
| Title:   | Engineer        | Title:       | Reviewer         |
| Signature:   | <i>Qifa Lai</i> | Signature:   | <i>Mira Xiao</i> |

**9.0 Correlation Page For Multiple Listings**

The following products, which are identical to those identified in this report except for model number and Listee name, are authorized to bear the ETL label under provisions of the Intertek Multiple Listing Program.

|              |   |
|--------------|---|
| BASIC LISTEE | Energie Volthium Inc                                  |
| Address      | 2600 Boulevard Ford #100, Chateauguay, Quebec J6J 4Z2 |
| Country      | Canada  |
| Product      | Energy Storge Systems                                 |

|   |                     |                          |                     |  |  |
|---|---------------------|--------------------------|---------------------|--|--|
| MULTIPLE LISTEE 1   | None                |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| Brand Name  |                     |                          |                     |  |  |
| ASSOCIATED MANUFACTURER   |                     |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| <table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MULTIPLE LISTEE 1 MODELS</td> <td style="width: 50%;">BASIC LISTEE MODELS</td> </tr> <tr> <td> </td> <td> </td> </tr> </table> |                     | MULTIPLE LISTEE 1 MODELS | BASIC LISTEE MODELS |  |  |
| MULTIPLE LISTEE 1 MODELS  | BASIC LISTEE MODELS |                          |                     |  |  |
|   |                     |                          |                     |  |  |

|   |                     |                          |                     |  |  |
|---|---------------------|--------------------------|---------------------|--|--|
| MULTIPLE LISTEE 2   | None                |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| Brand Name  |                     |                          |                     |  |  |
| ASSOCIATED MANUFACTURER   |                     |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| <table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MULTIPLE LISTEE 2 MODELS</td> <td style="width: 50%;">BASIC LISTEE MODELS</td> </tr> <tr> <td> </td> <td> </td> </tr> </table> |                     | MULTIPLE LISTEE 2 MODELS | BASIC LISTEE MODELS |  |  |
| MULTIPLE LISTEE 2 MODELS  | BASIC LISTEE MODELS |                          |                     |  |  |
|   |                     |                          |                     |  |  |

|   |                     |                          |                     |  |  |
|---|---------------------|--------------------------|---------------------|--|--|
| MULTIPLE LISTEE 3   | None                |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| Brand Name  |                     |                          |                     |  |  |
| ASSOCIATED MANUFACTURER   |                     |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| <table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MULTIPLE LISTEE 3 MODELS</td> <td style="width: 50%;">BASIC LISTEE MODELS</td> </tr> <tr> <td> </td> <td> </td> </tr> </table> |                     | MULTIPLE LISTEE 3 MODELS | BASIC LISTEE MODELS |  |  |
| MULTIPLE LISTEE 3 MODELS  | BASIC LISTEE MODELS |                          |                     |  |  |
|   |                     |                          |                     |  |  |

## 10.0 General Information

The Applicant and Manufacturer have agreed to produce, test and label ETL Listed products in accordance with the requirements of this Report. The Manufacturer has also agreed to notify Intertek and to request authorization prior to using alternate parts, components or materials.

### COMPONENTS

Components used shall be those itemized in this Intertek report covering the product, including any amendments and/or revisions.

### LISTING MARK

The ETL Listing mark applied to the products shall either be separable in form, such as labels purchased from Intertek, or on a product nameplate or other media only as specifically authorized by Intertek. Use of the mark is subject to the control of Intertek.

The mark must include the following four items:

- 1) applicable country identifiers "US" and/or "C" or "US", "C" and "EU"
- 2) the word "Listed" or "Classified" or "Recognized Component" (whichever is appropriate)
- 3) a control number issued by Intertek
- 4) a product descriptor that identifies the standards used for certification. Example:

**For US standards**, the words, "Conforms to" shall appear with the standard number along with the word, "Standard" or "Std." Example: "Conforms to ANSI/UL Std. XX."

**For Canadian standards**, the words "Certified to CAN/CSA Standard CXX No. XX." shall be used, or abbreviated, "Cert. to CAN/CSA Std. CXX No. XX."

Can be used together when both standards are used.

**If all standards on the ATM have the same standard title**, the shared title or its abbreviation may be used in place of the examples above. Example: "Medical Electrical Equipment" or "MEE"; "Information Technology Equipment" or "ITE"; "Audio/Video Information And Communication Technology Equipment" or "AV ICTE".

**Note: A facsimile must be submitted to Intertek, Attn: Follow-up Services for approval prior to use.**

The facsimile need not have a control number. A control number will be issued **after signed Certification Agreements** have been received by the Follow-up Services office, approval of the facsimile of your proposed Listing Mark, satisfactory completion of the Listing Report, and scheduling of a factory assessment in your facility.

### MANUFACTURING AND PRODUCTION TESTS

Manufacturing and Production Tests shall be performed as required in this Report.

### FOLLOW-UP SERVICE

Periodic unannounced audits of the manufacturing facility (and any locations authorized to apply the mark) shall be scheduled by Intertek. An audit report shall be issued after each visit. Special attention will be given to the following:

1. Conformance of the manufactured product to the descriptions in this Report.
2. Conformance of the use of the ETL mark with the requirements of this Report and the Certification Agreement.
3. Manufacturing changes.
4. Performance of specified Manufacturing and Production Tests.

In the event that the Intertek representative identifies non-conformance(s) to any provision of this Report, the Applicant shall take one or more of the following actions:

1. Correct the non-conformance.
2. Remove the ETL Mark from non-conforming product.
3. Contact the issuing product safety evaluation center for instructions.

### **10.1 Evaluation of Unlisted Components**

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

**The Applicant will be notified, in writing, via the applicable contact methods, as defined in Section 1.0, when these components must be selected and sent to Component Evaluation Center (CEC) for re-evaluation.**

**Due to particular testing requirements, some components may be requested to be shipped to specific labs. Thus, specific shipment destination(s) for each sample will be provided in the written notification.**

Managing CEC Location:

Intertek Testing Services Shenzhen Limited Guangzhou Branch

ETL Component Evaluation Center

Room 101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District

Guangzhou, Guangdong, China

Attn: Ms. Joey Kuang

Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

**11.0 Manufacturing and Production Tests**

The manufacturer agrees to conduct the following Manufacturing and Production Tests as specified:

**Required Tests**

None



This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

**Applicant:** Energie Volthium Inc

**Address:** 2600 Boulevard Ford #100,  
Chateauguay, Quebec J6J 4Z2

**Country:** Canada

**Party Authorized To Apply Mark:** Same as Manufacturer

**Report Issuing Office:** Intertek Testing Services Shenzhen Limited Guangzhou Branch

**Control Number:** 5029806

**Authorized by:** \_\_\_\_\_

for L. Matthew Snyder, Certification Manager



This document supersedes all previous Authorizations to Mark for the noted Report Number.

This Authorization to Mark is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Authorization to Mark. Only the Client is authorized to permit copying or distribution of this Authorization to Mark and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the agreement and in this Authorization to Mark. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

Intertek Testing Services NA Inc.  
545 East Algonquin Road, Arlington Heights, IL 60005  
Telephone 800-345-3851 or 847-439-5667 Fax 312-283-1672


|                     |  |
|---------------------|--|
| <b>Standard(s):</b> | Energy Storage Systems and Equipment [ANSI/CAN/UL 9540:2023 Ed.3]  |
| <b>Product:</b>     | Energy Storge Systems  |
| <b>Brand Name:</b>  | Volthium   |
| <b>Models:</b>      | 51.2-100V2-XW Pro 6.8K1, 51.2-100V3-XW Pro 6.8K1, 51.2-100V4-XW Pro 6.8K1, 51.2-100V5-XW Pro 6.8K1, 51.2-100V6-XW Pro 6.8K1, 51.2-100V7-XW Pro 6.8K1, 51.2-100V8-XW Pro 6.8K1, 51.2-100V9-XW Pro 6.8K1, 51.2-100V10-XW Pro 6.8K1, 51.2-100V11-XW Pro 6.8K1, 51.2-100V12-XW Pro 6.8K1, 51.2-100V13-XW Pro 6.8K1, 51.2-100V14-XW Pro 6.8K1, 51.2-100V4-XW Pro 6.8K2, 51.2-100V5-XW Pro 6.8K2, 51.2-100V6-XW Pro 6.8K2, 51.2-100V7-XW Pro 6.8K2, 51.2-100V8-XW Pro 6.8K2, 51.2-100V9-XW Pro 6.8K2, 51.2-100V10-XW Pro 6.8K2, 51.2-100V11-XW Pro 6.8K2, 51.2-100V12-XW Pro 6.8K2, 51.2-100V13-XW Pro 6.8K2, 51.2-100V14-XW Pro 6.8K2, 51.2-100V15-XW Pro 6.8K2, 51.2-100V16-XW Pro 6.8K2, 51.2-100V17-XW Pro 6.8K2, 51.2-100V18-XW Pro 6.8K2, 51.2-100V19-XW Pro 6.8K2, 51.2-100V20-XW Pro 6.8K2, 51.2-100V21-XW Pro 6.8K2, 51.2-100V22-XW Pro 6.8K2, 51.2-100V23-XW Pro 6.8K2, 51.2-100V24-XW Pro 6.8K2, 51.2-100V25-XW Pro 6.8K2, 51.2-100V26-XW Pro 6.8K2, 51.2-100V27-XW Pro 6.8K2, 51.2-100V28-XW Pro 6.8K2 |

| 1.0 Reference and Address |   |                              |               |
|---------------------------|---|------------------------------|---------------|
| Report Number             | 240229127GZU-002  | Original Issued: 30-Jul-2024 | Revised: None |
| Standard(s)               | Energy Storage Systems and Equipment [ANSI/CAN/UL 9540:2023 Ed.3] |                              |               |
| Applicant                 | Energie Volthium Inc  | Manufacturer                 |               |
| Address                   | 2600 Boulevard Ford #100,<br>Chateauguay, Quebec J6J 4Z2          | Address                      |               |
| Country                   | Canada  | Country                      |               |
| Contact                   | Yanni Samson  | Contact                      |               |
| Phone                     | 514-989-9586  | Phone                        |               |
| FAX                       | --  | FAX                          | --            |
| Email                     | yanni.samson@volthium.com   | Email                        |               |

| 2.0 Product Description |  |
|-------------------------|--|
| Product                 | Energy Storage Systems   |
| Brand name              |   |
| Description             | The product covered by this report are intelligent energy storage systems. It includes grid support hybrid inverters and a lithium battery systems (LiFePO4). Installation should be located where specified in installation manual as well as in accordance with the National Electrical Code (NEC) and the Canadian Electrical Code (CEC).   |
| Models                  | 51.2-100V2–XW Pro 6.8K1, 51.2-100V3–XW Pro 6.8K1, 51.2-100V4–XW Pro 6.8K1, 51.2-100V5–XW Pro 6.8K1, 51.2-100V6–XW Pro 6.8K1, 51.2-100V7–XW Pro 6.8K1, 51.2-100V8–XW Pro 6.8K1, 51.2-100V9–XW Pro 6.8K1, 51.2-100V10–XW Pro 6.8K1, 51.2-100V11–XW Pro 6.8K1, 51.2-100V12–XW Pro 6.8K1, 51.2-100V13–XW Pro 6.8K1, 51.2-100V14–XW Pro 6.8K1, 51.2-100V4–XW Pro 6.8K2, 51.2-100V5–XW Pro 6.8K2, 51.2-100V6–XW Pro 6.8K2, 51.2-100V7–XW Pro 6.8K2, 51.2-100V8–XW Pro 6.8K2, 51.2-100V9–XW Pro 6.8K2, 51.2-100V10–XW Pro 6.8K2, 51.2-100V11–XW Pro 6.8K2, 51.2-100V12–XW Pro 6.8K2, 51.2-100V13–XW Pro 6.8K2, 51.2-100V14–XW Pro 6.8K2, 51.2-100V15–XW Pro 6.8K2, 51.2-100V16–XW Pro 6.8K2, 51.2-100V17–XW Pro 6.8K2, 51.2-100V18–XW Pro 6.8K2, 51.2-100V19–XW Pro 6.8K2, 51.2-100V20–XW Pro 6.8K2, 51.2-100V21–XW Pro 6.8K2, 51.2-100V22–XW Pro 6.8K2, 51.2-100V23–XW Pro 6.8K2, 51.2-100V24–XW Pro 6.8K2, 51.2-100V25–XW Pro 6.8K2, 51.2-100V26–XW Pro 6.8K2, 51.2-100V27–XW Pro 6.8K2, 51.2-100V28–XW Pro 6.8K2 |
| Model Similarity        | All models are identical only except the incorporating grid support hybrid inverter and the number of battery moduels.<br>About series model 51.2-100Vx-XW Pro 6.8Kx<br>The suffix "51.2-100" denotes the battery module.<br>The suffix "Vx" denotes the number of battery moduels. It can be 2 to 28.<br>The suffix "XW Pro 6.8K" denotes the maximum output power 6.8K of inverter.<br>The last suffix "x" denotes the number of inverter. It can be 1 or 2.<br>The battery module model 51.2-100-R-H-3U-C is identical to 51.2-100-R-3U-C, except that model 51.2-100-R-H-3U-C of the internal heating sheets can be controlled by software.  |
| Ratings                 | Please refer to section 7.0, Illustration 4, 4a to 4j for details.   |
| Other Ratings           | Please refer to section 7.0, Illustration 4, 4a to 4j for details.   |

**3.0 Product Photographs**

**Photo 1 - Overall view of the battery system**

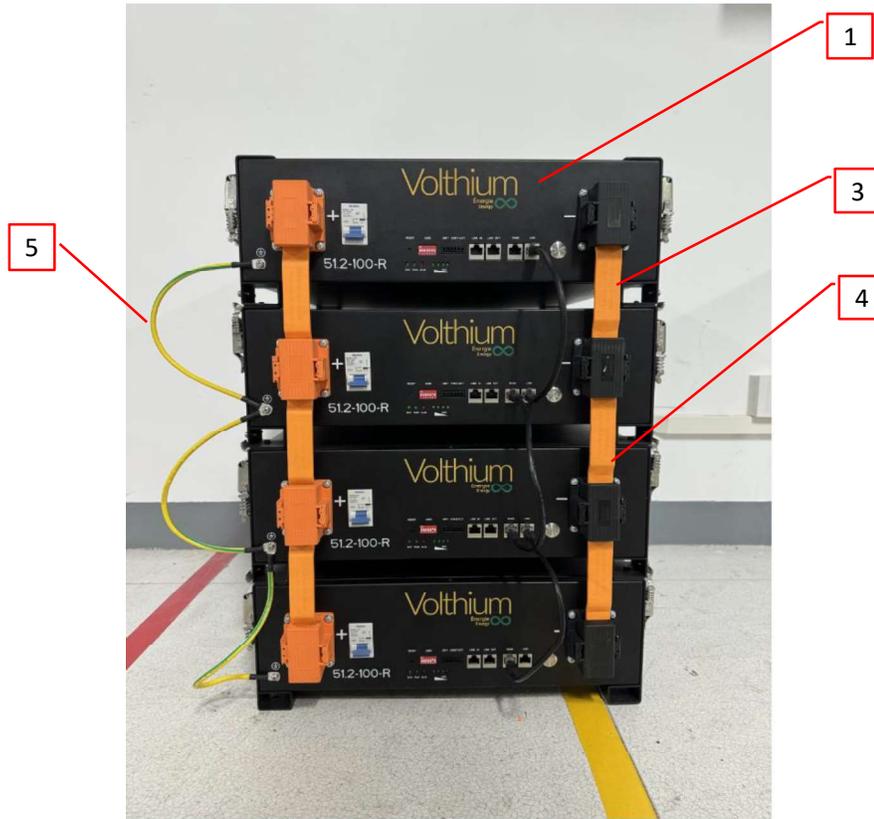

**Photo 2 - Overall view of the inverter**



| 4.0 Critical Components |                       |                             |                                      |                           |  |                                    |
|-------------------------|-----------------------|-----------------------------|--------------------------------------|---------------------------|--|------------------------------------|
| Photo #                 | Item no. <sup>1</sup> | Name                        | Manufacturer/ trademark <sup>2</sup> | Type / model <sup>2</sup> | Technical data and securement means  | Mark(s) of conformity <sup>3</sup> |
| 1                       | 1                     | Lithium iron battery system | Energie Volthium Inc                 | 51.2-100-R-3U-C           | Type of battery: LiFePO4<br>Normal Voltage: 51.2Vdc<br>Max. continue charging current: 70A<br>Max. continue discharging current: 100A<br>Rated capacity: 100Ah<br>Rated energy: 5.12kWh<br>May be used with 2 to 28 battery modules for a system   | cETLus                             |
|                         |                       |                             |                                      | 51.2-100-R-H-3U-C         | Type of battery: LiFePO4<br>Normal Voltage: 51.2Vdc<br>Max. continue charging current: 70A<br>Max. continue discharging current: 100A<br>Rated capacity: 100Ah<br>Rated energy: 5.12kWh<br>May be used with 2 to 28 battery modules for a system   | cETLus                             |
| 2                       | 2                     | Inverter                    | Schneider Electric Solar Inc.        | XW Pro 6848 NA            | Charge mode: 40-64 Vdc, max current: 140 Adc<br>Grid mode: 211-264 Vac (240 Vac) or 105.6-132 Vac (120 Vac), 59.4-60.4 Hz, 28.3 Arms (240Vac), 48 Arms (120 Vac), 6000 W(240 Vac), 5760W(120 Vac)<br>Grid output side: 211~264 Vac(240 Vac) or 105.6~132 Vac(120 Vac), max 28.3 Arms(240 Vac), max 48 Arms(120 Vac), max.6800VA(240 Vac), max.5760VA(120 Vac), 60Hz<br>Stand-alone: 120/240 Vac, 28 Arms(240 Vac), 48 Arms(120 Vac), 6800 W(240 Vac), 5760W(120 Vac), 60Hz | cCSAus                             |

| 4.0 Critical Components |                       |   |  |                           |  |                                    |
|-------------------------|-----------------------|---|--|---------------------------|--|------------------------------------|
| Photo #                 | Item no. <sup>1</sup> | Name  | Manufacturer/ trademark <sup>2</sup>             | Type / model <sup>2</sup> | Technical data and securement means                                | Mark(s) of conformity <sup>3</sup> |
| 1                       | 3                     | Copper bar  | Dongguan Zhongzhi Electronics Technology Co.,Ltd | 528*25*4                  | COOPER, length: 528mm, width: 25mm, thickness: 4mm, pressed nickel | NR                                 |
|                         |                       |   | Various  | Various                   | COOPER, length: 528mm, width: 25mm, thickness: 4mm, pressed nickel | NR                                 |
|                         |                       |   | Dongguan Zhongzhi Electronics Technology Co.,Ltd | 200*25*4                  | COOPER, length: 200mm, width: 25mm, thickness: 4mm, pressed nickel | NR                                 |
|                         |                       |   | Various  | Various                   | COOPER, length: 200mm, width: 25mm, thickness: 4mm, pressed nickel | NR                                 |
| 1                       | 4                     | Tube  | PENGYUAN ELECTRONICS MATERIAL CO LTD             | RDHF                      | 600V, 125°C, thickness: 1-2mm                                      | cURus                              |
|                         |                       |   | Various  | Various                   | 600V, 125°C, thickness: 1-2mm                                      | cURus                              |
| 1                       | 5                     | Ground wire   | DONGGUAN ZHONGZHEN NEW ENERGY TECHNOLOGY CO.,LTD | 3512                      | 600V, 200°C, 10 AWG  | cURus                              |
|                         |                       |   | Various  | 3512                      | 600V, 200°C, 10 AWG  | cURus                              |
| 1                       | 6                     | Connecting wire for battery system and inverter (not shown) | SHENZHEN MYSUN INSULATION MATERIALS CO LTD       | 3512                      | 600V, 200°C, 2/0 AWG   | cURus                              |
|                         |                       |   | Various  | 3512                      | 600V, 200°C, 2/0 AWG   | cURus                              |

| 4.0 Critical Components |                       |                   |                                      |                           |                                     |                                    |
|-------------------------|-----------------------|-------------------|--------------------------------------|---------------------------|-------------------------------------|------------------------------------|
| Photo #                 | Item no. <sup>1</sup> | Name              | Manufacturer/ trademark <sup>2</sup> | Type / model <sup>2</sup> | Technical data and securement means | Mark(s) of conformity <sup>3</sup> |
| 1                       | 7                     | Label (not shown) | Various                              | Various                   | Adhesive-Type, Min. 80°C            | UR                                 |

NOTES:

- 1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.
- 2) "Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.
- 3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates Unlisted and only visual examination is necessary. "See 5.0" indicates Unlisted components or assemblies to be evaluated periodically refer to section 5.0 for details.

## **5.0 Critical Unlisted CEC Components**

No Unlisted CEC components are used in this report.

## 6.0 Critical Features

Recognized Component - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

Listed Component - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

Unlisted Component - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

Critical Features/Components - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the product standard.

Construction Details - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.

1. Mechanical Assembly - Components such as switches, fuseholders, connectors, wiring terminals and display lamps are mounted and prevented from shifting or rotating by the use of lockwashers, starwashers, or other mounting format that prevents turning of the component.
2. Corrosion Protection - All ferrous metal parts are protected against corrosion by painting, plating or the equivalent.
3. Accessibility of Live Parts - All uninsulated live parts in primary circuitry are housed within a metal and non-metallic enclosure constructed with no openings other than those specifically described in Sections 4 and 5.
4. Grounding - All exposed dead-metal parts and all dead-metal parts within the enclosure that are exposed are connected to the grounding lead of the power supply cord or the equipment grounding terminal.
5. Polarized Connection - This product is provided with a polarized power supply connection. All single pole switches and fuses are connected only to the ungrounded supply circuit conductor.
6. Internal Wiring - Internal wiring is routed away from sharp or moving parts. Internal wiring leads terminating in soldered connections are made mechanically secure prior to soldering. Recognized Component separable (quick disconnect) connectors of the positive detent type, closed loop connectors, or other types specifically described in the text of this report are also acceptable as internal wiring terminals. At points where internal wiring passes through metal walls or partitions, the wiring insulation is protected against abrasion or damage by plastic bushings or grommets.
7. Schematics - Refer to Illustration 2 for schematics requiring verification during Field Representative Inspection Audits.
8. Markings - The product is marked as follows: Applicant's brand name, model number, date of manufacturer, electrical ratings.
9. Cautionary Markings - refer to Illustration 1 for details.
10. Installation, Operating and Safety Instructions - Instructions for installation and use of this product are provided by the manufacturer. Refer to Illustrations 3, 3a to 3n for details.

## 7.0 Illustrations

### Illustration 1 - Caution and warning labels



## WARNING / AVERTISSEMENT / ADVERTENCIA

Electric shock hazard.

Do not disassemble.

Do not hit or crush.

Do not connect in reverse  
or short circuit.

Do not expose to excessive heat.

To Reduce the Risk of Injury,  
read all instructions.

Risque d'électrocution.

chaleur excessive.

Ne pas démonter.

Ne pas heurter ni écraser.

Ne branchez pas en marche

arrière ou en court-circuit.

Ne pas exposer à une chaleur excessive.

Pour prévenir les blessures,  
lire toutes les instructions.

Riesgo de shock eléctrico.

No desarmar.

No golpee ni aplaste.

No se conecte en reversa o cortocircuito.


No exponga al calor excesivo.

Para reducir el riesgo de contraer Injury,

lea todas las instrucciones.

**7.0 Illustrations**

**Illustration 2 - Circuit diagram (representative)**

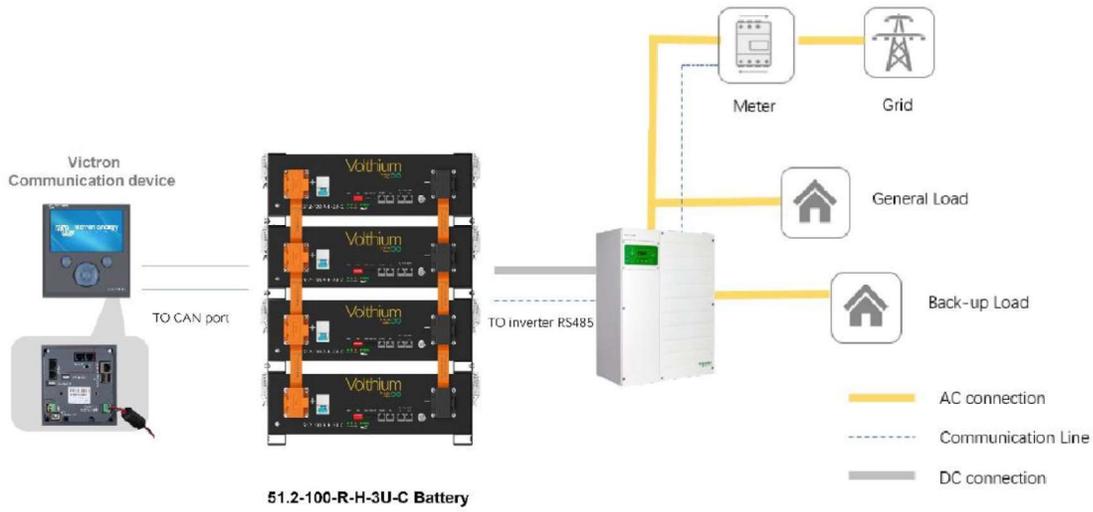

## 7.0 Illustrations

### Illustration 3 - User manual(partly)

## 2. Safety

### 2.1 Safety precautions

#### DANGER

##### Explosion risk

- Do not impact the battery with heavy objects.
- Do not squeeze or pierce the battery pack.
- Do not throw the battery pack into the fire.

#### WARNING

##### Fire risk

- Do not expose the battery pack to the condition over 80°C.
- Do not put the battery near a heat source, such as a fireplace.
- Do not expose the battery pack to direct sunlight or raining.

#### CAUTION

##### Electric shock risk

- Do not allow non-qualified person to disassemble the battery pack.
- Do not touch the battery pack with wet hands.
- Do not expose the battery pack to moisture or liquid environment.

#### NOTICE

##### Damage risk

- Do not short-circuit or reverse connect the battery.
- Do not use chargers or charging devices unapproved by the manufacturer to charge the battery.
- Do not mix batteries from different manufacturers or different kinds, types or brands.

### 2.2 Safety instructions

The battery has been designed and tested in accordance with international (such as UL, IEC, UN38.3 etc.)

## 7.0 Illustrations

### Illustration 3a - User manual(partly)

safety requirements. However, due to various factors during the whole lifetime process, Volthium cannot guarantee absolute safety, in order to prevent personal injury and property damage and ensure long-term operation of the battery, please do read the below section carefully to operate the battery and handle emergency situations.

#### 2.2.1 Safety gear

It is required to wear the following safety gear when installing and handling the battery pack.



Insulated gloves



Safety Glasses



Safety Shoes

#### 2.2.2 Emergency safety measures

##### Water invasion

Please cut off the AC power supply of the system first and then disconnect all switched under the premise of ensuring safety.

##### Electrolyte or gas leakage

If the battery pack leaks electrolyte, avoid contact with the leaking liquid or gas. If one is exposed to the leaked substance, immediately perform the actions described below.

- **Gas Inhalation:** Evacuate the people in the contaminated area and seek medical aid immediately.
- **Eye Contact:** Flush your eye with clean and flowing water for 15 min, and seek medical aid immediately.
- **Skin Contact:** Thoroughly rinse the exposed area with soap and water to be sure no chemical or soap is left on them, and seek medical aid immediately.
- **Ingestion:** Induce vomiting, and seek medical help immediately.

### ⚠ WARNING

In case of fire situations, please use carbon dioxide fire extinguisher rather than liquid to put out fires.

#### 2.2.3 Other Tips

- All the product are strictly inspected before shipment, please contact your supplier for replacement if you notice there's any defectives such as swelling.
- Do not disassemble batteries and components, otherwise the manufacturer will not be responsible for any damage caused by unauthorized disassembly or repair.
- Do enable the battery to be safely grounded before use to make sure the system in safe and normal operation.
- Please ensure that the electric parameters of these devices are compatible mutually before connecting the battery to other devices.
- Please take the environmental factors into careful considerations to ensure that the system can work in a suitable condition as the environment and storage methods have a certain impact on the service life and reliability of this product.

## 7.0 Illustrations

### Illustration 3b - User manual(partly)

#### 4.3 Start Installation

##### Qualified person

##### 4.3.1 Remainder

Please check again the following conditions or equipment whether meet the requirements before installation:

- Check if there's enough space for installation, and if the load-bearing capacity of the bracket or cabinet meets the weight requirements.
- Check whether the power cable pair(s) used meets the maximum current requirement for operation.
- Check whether the overall layout of power supply equipment and batteries at the construction site is reasonable.
- Check whether the installer is wearing anti-static wristband.
- Check whether there're two people on the construction site for installation work.
- Check if there's potential risks at location of installation site, e.g flooding, sun exposure, corrosion, and salt spray.

##### 4.3.2 Procedures

###### CAUTION

Injuries may result if the product is lifted incorrectly or dropped while being transported or mounted.  
Wear suitable personal protective equipment for all work on the product.

###### CAUTION

Ensure that no lines are laid in the wall which could be damaged when drilling holes.

##### 4.3.2.1 Rack mounted

**7.0 Illustrations**

**Illustration 3c - User manual(partly)**

|   |
|---|
| 1.Take the battery pack out from carton.  |
| 2.Get the Rack or cabinet ready and place it horizontally at a reasonable location.   |
| 3.Place the battery on the rack or cabinet tray via manual-lift, Insert the screws and fasten the battery to the rack or cabinet. |
| 4.Finish the cable connection   |

**4.3.2.2 Stack mounted**

|   |  |
|---|--|
| 1.Take the battery pack out from carton.  |  |
| 2.Remove the mounting ear from both side of the battery.  |    |
| 3.Install the stacking component at four corners of the battery.  |   |
| 4.Remove the hook on the stacking component of the bottom battery of each stack.                                      |  |
| 5.Put another battery on top of the previous module, and align the locating holes and connect the 4 lockers together. |  |

|   |  |
|---|--|
| 6.The maximum number in each stack is 4 modules.<br>7.Finish the cable connection |  |
|---|--|

Note: Do not stack the batteries directly.

## 7.0 Illustrations

Illustration 3d - User manual(partly)

### 6.1 Safety precautions

## Product Safety Information

**IMPORTANT:** Remember to read and follow all product safety information in this document.

### General Safety Instructions

Before using the inverter/charger, read all instructions and cautionary markings on the unit, the batteries, and all appropriate sections of this manual.

- Use of accessories not recommended or sold by the manufacturer may result in a risk of fire, electric shock, or injury to persons.
- The inverter/charger is designed to be permanently connected to your AC and DC electrical systems. The manufacturer recommends that all wiring be done by a certified technician or electrician to ensure adherence to the local and national electrical codes applicable in your jurisdiction.
- To avoid a risk of fire and electric shock, make sure that existing wiring is in good condition and that wire is not undersized. Do not operate the inverter/charger with damaged or substandard wiring.
- Do not operate the inverter/charger if it has been damaged in any way.
- Most of the parts in this unit are not user-serviceable parts. Do not disassemble the inverter/charger except where noted for connecting wiring and cabling. See your warranty for instructions on obtaining service. Attempting to service the unit yourself may result in a risk of electrical shock or fire. Internal capacitors remain charged after all power is disconnected.
- To reduce the risk of electrical shock, disconnect both AC and DC power from the inverter/charger before attempting any maintenance or cleaning or working on any components connected to the inverter/charger. Putting the unit in Standby mode will not reduce this risk.
- The inverter/charger must be connected to AC ground, following the instructions in the Conext series.
- Do not expose this unit to rain, snow, or liquids of any type. This product is designed for indoor use only. Damp environments will significantly shorten the life of this product and corrosion caused by dampness will not be covered by the product warranty.
- Remove personal metal items such as rings, bracelets, necklaces, and watches when working with electrical equipment.
- Do not expose this unit to excessive shock or vibration. This product is designed for stationary indoor use only. Mechanical fatigue caused by excessive shock or vibration can significantly shorten the life of this product and will not be covered by the product warranty.

## 7.0 Illustrations

Illustration 3e - User manual(partly)

  **DANGER**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION, ARC FLASH, AND FIRE**

This document is in addition to, and incorporates by reference, the relevant product manuals for XW Pro inverter/charger. Before reviewing this document, you must read the relevant product manuals. Unless specified, information on safety, specifications, installation and operation is as shown in the primary documentation received with the product. Ensure you are familiar with that information before proceeding.

**Failure to follow these instructions will result in death or serious injury.**

  **DANGER**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION, ARC FLASH, AND FIRE**

- Apply appropriate personal protective equipment (PPE) and follow safe electrical work practices. See NFPA 70E or CSA Z462.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Never operate energized with covers removed
- Energized from multiple sources. Before removing covers identify all sources, de-energize, lock-out, and tag-out and wait 5 minutes for circuits to discharge
- Always use a properly rated voltage sensing device to confirm all circuits are de-energized.

**Failure to follow these instructions will result in death or serious injury.**

  **DANGER**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION, ARC FLASH, AND FIRE**

- Disconnect negative and positive DC conductors before servicing. DC conductors are to be treated as Hazardous Live and must be disconnected.
- Normally GROUNDED conductors may be UNGROUNDED and ENERGIZED when a GROUND FAULT is indicated in InsightLocal. Must be serviced by qualified personnel.

**Failure to follow these instructions will result in death or serious injury.**

## 7.0 Illustrations

### Illustration 3f - User manual(partly)

#### Precautions when Working with Batteries

**NOTE:** Battery work and maintenance must be done by qualified personnel knowledgeable about batteries to help ensure compliance with battery handling and maintenance safety precautions.

#### **DANGER**

##### HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH

- Remove watches, rings, or other metal objects.
- This equipment must only be installed and serviced by qualified electrical personnel.
- Keep sparks and flames away from the batteries.
- Use tools with insulated handles.
- Wear protective glasses, gloves and boots.
- Do not lay tools or other metal parts on top of batteries.

**Failure to follow these instructions will result in death or serious injury.**

#### **DANGER**

##### HAZARD OF ELECTRICAL SHOCK, EXPLOSION, OR FIRE

- Battery Circuit Breakers must be installed according to the specifications and requirements defined by Schneider Electric.
- Servicing of batteries must only be performed by qualified personnel knowledgeable about batteries and the required precautions. Keep unqualified personnel away from batteries.
- Disconnect the charging source prior to connecting or disconnecting battery terminals.

**Failure to follow these instructions will result in death or serious injury.**

#### Limitations on Use

#### **WARNING**

##### HAZARD DUE TO UNINTENDED USE

The XW Pro inverter is not intended for use in connection with life support systems or other medical equipment or devices. The XW Pro inverter can only be used in grid-interconnected, off grid, and integrated PV systems. It is not suitable for any other application areas.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

## 7.0 Illustrations

Illustration 3g - User manual(partly)

### Explosive Gas Precautions

| <b>⚠ WARNING</b>  |
|---|
| <b>EXPLOSION HAZARD</b><br>The XW Pro is not ignition protected. To prevent fire or explosion, do not install this product in locations that require ignition-protected equipment. This includes any space containing gasoline-powered machinery, fuel tanks, as well as joints, fittings, or other connections between components of the fuel system.<br><b>Failure to follow these instructions can result in death, serious injury, or equipment damage.</b> |

Working in the vicinity of lead acid batteries is dangerous. Some batteries generate explosive gases during normal operation. Therefore, you must read this Installation Guide and follow the instructions exactly before installing or using your inverter/charger.

To reduce the risk of battery explosion, follow these instructions and those published by the battery manufacturer and the manufacturer of the equipment in which the battery is installed.

### Maintenance

The XW Pro does not require scheduled maintenance. However it is required to be clear of dust and debris, especially around air intake and exhaust areas, at all times. Use a soft-bristle brush to clear the area around the air intake and exhaust.

|  |
|--|
| <b>NOTE:</b> A dirty foam air filter may lead to over-temperature events. If this occurs, qualified personnel may need to clean the foam air filter. See "Troubleshooting" on page 1 for more information. |
|--|

The surface of XW Pro can be cleaned using a lint-free soft cloth.

| <b>NOTICE</b>   |
|---|
| <b>HAZARD OF EQUIPMENT DAMAGE</b><br>Use only a soft cloth dampened with water and mild soap to clean the inverter.<br>Do not use solvents or chemicals that are corrosive or flammable.<br><b>Failure to follow these instructions can result in equipment damage.</b> |

## 7.0 Illustrations

Illustration 3h - User manual(partly)

## 6.3 Pre-Installation Planning

### Pre-Installation

Before installing the XW Pro, read all instructions and cautionary markings in this Installation Guide.

**NOTE:** Obtain all necessary permits prior to starting the installation. **Installations must meet all local codes and standards.** Installation of this equipment should only be performed by skilled personnel such as qualified electricians and Certified Renewable Energy (RE) System installers.

**NOTE:** If multiple XW Pro's are planned, refer to the XW Pro Multi-unit Design Guide (990-91373) for additional details and system solutions for larger installations.

#### **WARNING**

##### **HEAVY EQUIPMENT**

The XW Pro weighs approximately 120 lbs (55.5 kg). A two-person lift is required. To prevent personal injury, always use proper lifting techniques during installation.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

#### **NOTICE**

##### **EQUIPMENT DAMAGE**

- The Automatic Transfer Relays are rated at 60 A.
- Loads connected at AC OUT must not exceed the inverter's overload ratings or the 60 A limit, whichever is lower. Unless an external contactor or external transfer switch (such as the Schneider Electric BCS) is used, the 60 A limit also applies to the total combined loads connected to the AC OUT bus of multiple inverters connected in parallel.

**Failure to follow these instructions can result in equipment damage.**

### Planning the Installation

- Read this entire chapter before beginning the installation. It is important to plan the installation from beginning to end.
- Assemble all tools and materials needed for the installation.
- If multiple XW Pro's are planned, refer to the XW Pro Multi-unit Design Guide (990-91373).

## 7.0 Illustrations

### Illustration 3i - User manual(partly)

#### Installation Tools and Materials

To complete the installation, you will need the following tools:

- Socket wrench, appropriately sized
- Phillips head screwdriver, appropriately sized
- Level

Depending on your installation, additional hardware may be required. The following items are not included with the XW Pro:

- Battery cables from the battery to the PDP
- Grounding wires that lead from a power source, like the main power panel or a battery, to the PDP, nor any grounding wires that lead from the PDP to any subpanel.
- Lag bolts to secure the mounting plates
- Hacksaw for cutting busbars
- Screws for mounting the conduit box
- Additional wiring to connect the PDP to the inverter load sub-panel and utility grid
- Appropriate materials and hardware for additional wall-mount support

#### Location

The XW Pro is certified for dry, indoor (heated or unheated) installations only.

Locate any electronic equipment susceptible to radio frequency and electromagnetic interference as far away from the inverter as possible.

#### Fire safety

| <b>⚠ WARNING</b>   |
|--|
| <b>IGNITION AND FIRE HAZARD</b>  |
| This equipment is not ignition protected. To prevent fire or explosion, do not install this product in locations that require ignition-protected equipment. This includes any confined space containing lead acid batteries, or flammable chemicals such as, natural gas (NG), liquid petroleum gas (LPG) or gasoline (Benzine/Petrol).  |
| <ul style="list-style-type: none"><li>▪ Do not install in a confined space with machinery powered by flammable chemicals, or storage tanks, fittings, or other connections between components of fuel or flammable chemical systems.</li><li>▪ Do not install the inverter on a flammable surface. If installing the inverter on a wood surface, ensure that the wood is flame retardant.</li><li>▪ Do not install the inverter near readily flammable materials such as cloth, paper, straw, or plastic sheeting. Keep flammable materials a minimum distance of 600 cm (24 in.) from the top surface and 30 cm (12 in.) from either side surface and the front of the XW Pro Inverter/Charger.</li></ul> |
| <b>Failure to follow these instructions can result in death, serious injury, or equipment damage.</b>  |


**7.0 Illustrations**

**Illustration 3j - User manual(partly)**

**Clearance Requirements**

Provide at least 91 cm (36 in.) of clearance in front of the inverter, and a minimum of 15 cm (6 in.) of clearance at the top and bottom of the inverter for ventilation. Ensure the vents remain unobstructed, and that the XW Pro Power Distribution Panel door has adequate room to fully open.

*Figure 13 Example of clearance requirements for a Conext XW Pro with PDP*

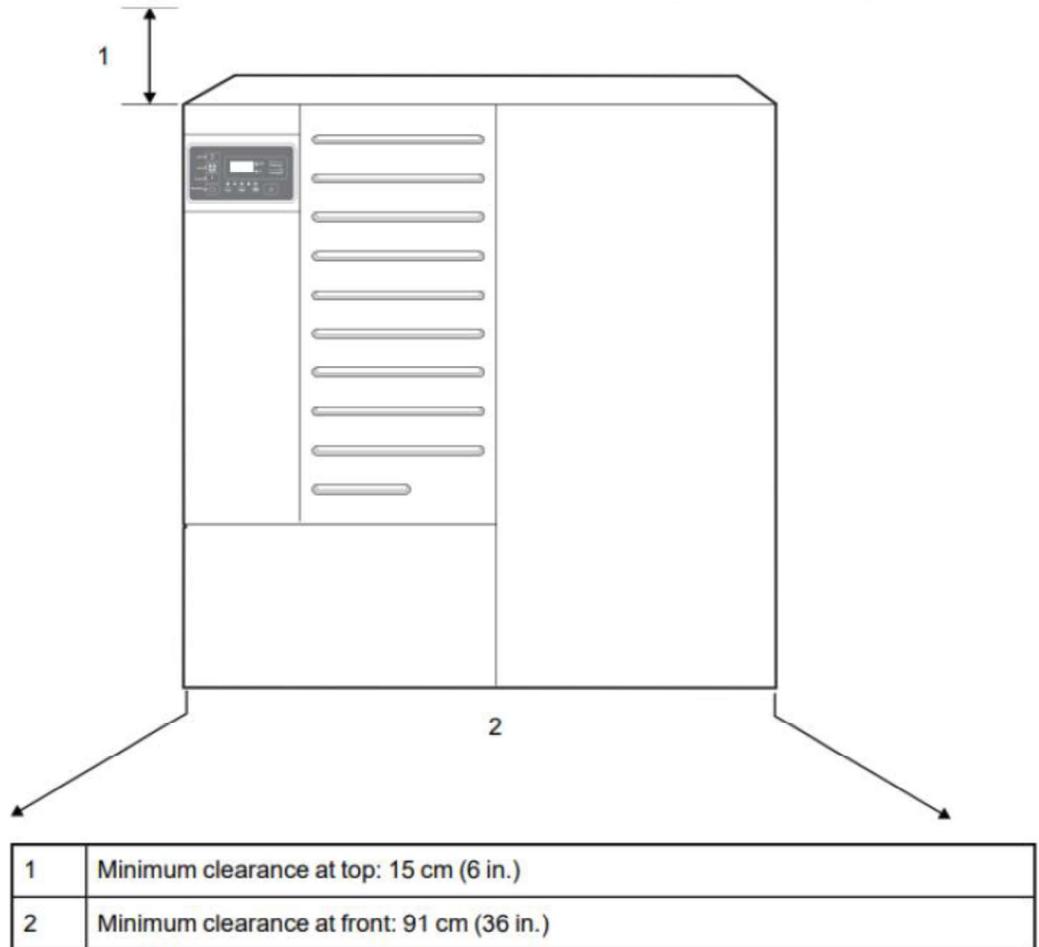

## 7.0 Illustrations

Illustration 3k - User manual(partly)

### Knockout Selection


**NOTE:** Do not drill, cut, or punch holes into the XW Pro, conduit box or Power Distribution Panel (PDP). Use only the knockouts provided for conduit entry.

The XW Pro, Power Distribution Panel (PDP), and conduit box are equipped with nested dual knockouts for wiring through conduits.

Read "AUX Port" on page 53 and choose the knockouts for your installation.

See below, for an example of available knockouts along the top and side of the Power Distribution Panel (PDP).

Figure 14 Example of available knockouts on the PDP

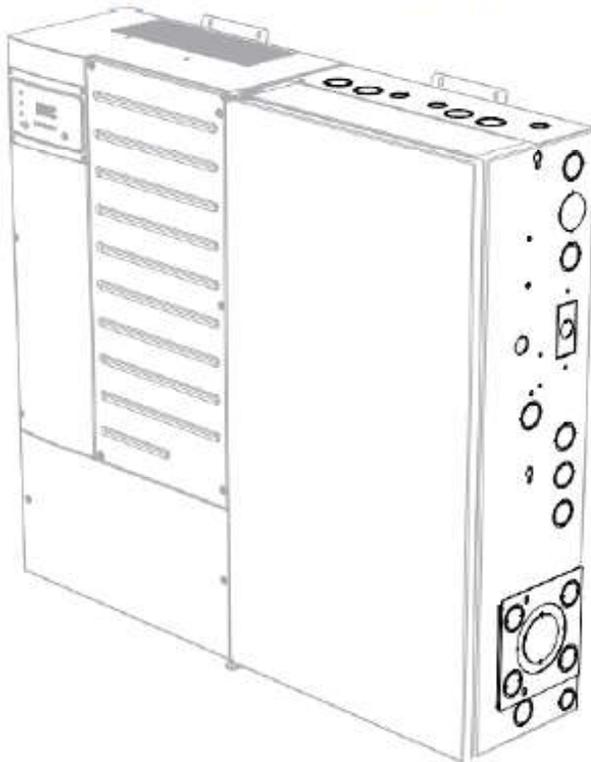

Remove your choice of knockouts from the XW Pro chassis, conduit box, and/or Power Distribution Panel (PDP). Verify that no debris remains inside the chassis. Insert appropriately-sized conduit bushings into each conduit hole.

## 7.0 Illustrations

Illustration 3I - User manual(partly)


### Air Filter and AUX Port Connector Installation

Insert the air filter by tucking it into the grooves on the sides of the air vent cover, see Figure 15 .

If you are planning to use the auxiliary (AUX) port features, insert the AUX port connector into the AUX port, see Figure 15 .

For more information, see AUX Port on page 53 of this Guide.

Figure 15 Air Filter and AUX Port Connector Installation

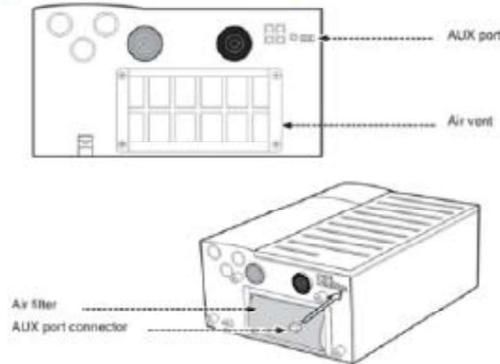

### Wall-Mounting

#### **⚠ WARNING**

##### **HEAVY EQUIPMENT**

The XW Pro can cause serious injury if it falls or is dropped on a person.

For structural and seismic stability, the XW Pro must be mounted onto a vertical supporting surface strong enough to support a minimum of 500 lbs (227 kg).

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

A mounting plate is included with each XW Pro and Power Distribution Panel (PDP), designed to meet standards for structural and seismic stability. When properly installed, the system also meets Section 59 of UL 1741 for Static Loads.

Each XW Pro and Power Distribution Panel (PDP) requires a separate generic mounting plate. Attach the mounting plate to the wall before you attach the XW Pro or Power Distribution Panel (PDP) to the mounting plate.

Each mounting plate requires a minimum of four 1/4-inch diameter lag bolts or other fasteners (not included). The fasteners must be strong enough to support 500 lbs (227 kg).

## 7.0 Illustrations

### Illustration 3m - User manual(partly)

#### Installing the Mounting Plate


##### To install the mounting plate:

1. Locate the wall studs.
2. If necessary, secure a  $\frac{3}{4}$ " fire-rated plywood<sup>1</sup> panel or other appropriate additional support panel to the wall studs. The additional support panel must span at least three wall studs.

**NOTE:** To secure the additional support panel to the wall, use hardware sized to support a minimum of 500 lbs. (Hardware not included.)

3. Using a level, secure the first mounting bracket to the wall. Verify that the mounting plate is centered on the wall studs, as shown in Figure 17. Use recommended anchoring hardware to secure the plate, see .

Figure 17 Mounting plate centered on wall studs

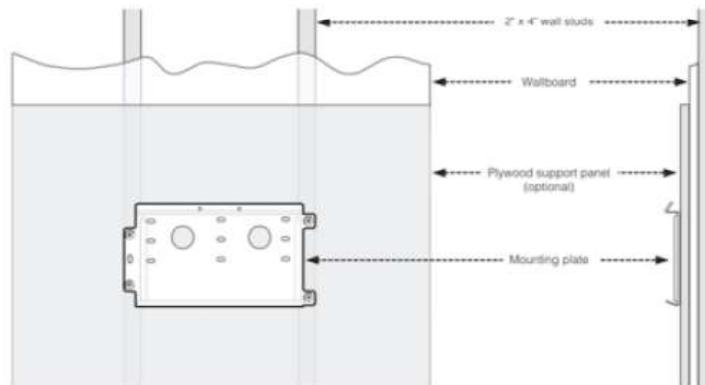

##### Installation tip

If you install the bottom of the mounting plate at 60" from floor, the inverter information panel will be approximately 65" from the floor.


4. Install additional mounting plates adjacent to each other as needed.

**NOTE:** The mounting plates are designed to interlock, as shown in the figure below, so that multiple plates can be installed without additional measuring or leveling.

**7.0 Illustrations**

**Illustration 3n - User manual(partly)**

Figure 18 Two interlocking mounting plates

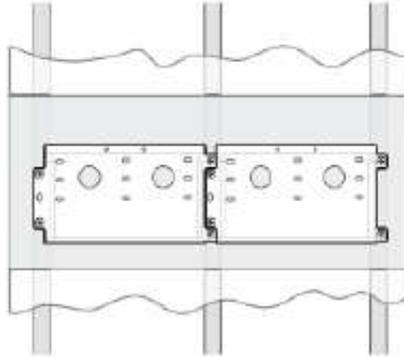


**Wall-Mounting the XW Pro and PDP**

**To wall-mount the XW Pro Inverter/Charger:**

1. Align the flange on the back of the XW Pro chassis with the bottom edge of the mounting plate, as shown in .

Figure 19 Wall-mounting the XW Pro

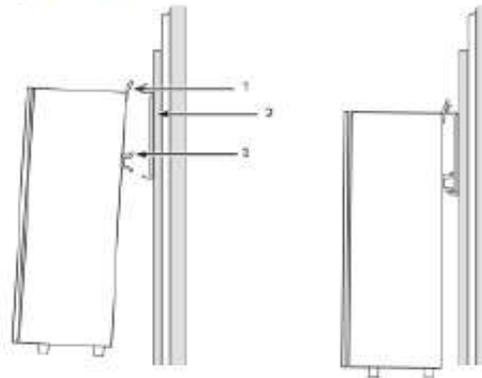

|   |                                |
|---|--------------------------------|
| 1 | XW Pro and the chassis bracket |
| 2 | Mounting plate                 |
| 3 | XW Pro and chassis flange      |

**⚠ WARNING**

**HEAVY EQUIPMENT**

The XW Pro weighs approximately 120 lbs. A two-person lift is required. To prevent personal injury, always use proper lifting techniques during installation.

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

**7.0 Illustrations**

**Illustration 4 - Ratings**

| Model                                     | 51.2-100V2-XW Pro<br>6.8K1  | 51.2-100V3-XW Pro<br>6.8K1 | 51.2-100V4-XW Pro<br>6.8K1 | 51.2-100V5-XW Pro<br>6.8K1 |
|---|---|----------------------------|----------------------------|----------------------------|
| <b>Battery data</b>                       |   |                            |                            |                            |
| Battery type                              | LiFePO4   |                            |                            |                            |
| Total capacity                            | 200Ah   | 300Ah                      | 400Ah                      | 500Ah                      |
| Total energy                              | 10.24kWh  | 15.36kWh                   | 20.48kWh                   | 25.6kWh                    |
| Battery voltage range                     | 44.8-57.6 d.c.V   |                            |                            |                            |
| Nominal voltage                           | 51.2 d.c.V  |                            |                            |                            |
| Max. charge current                       | 140 d.c.A   | 140 d.c.A                  | 140 d.c.A                  | 140 d.c.A                  |
| Max. discharge current                    | 140 d.c.A   | 140 d.c.A                  | 140 d.c.A                  | 140 d.c.A                  |
| Parallel Number                           | 1S2P  | 1S3P                       | 1S4P                       | 1S5P                       |
| <b>Grid-interactive mode</b>              |   |                            |                            |                            |
| Range of operating DC voltage             | 47-58 Vdc   |                            |                            |                            |
| Max. operating current                    | 160 Adc   |                            |                            |                            |
| Max. input short circuit current          | 3000 Adc for one inverter   |                            |                            |                            |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |                            |                            |                            |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |                            |                            |                            |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |                            |                            |                            |
| Nominal output voltage                    | 240 Vac or 120 Vac  |                            |                            |                            |
| Max. output current                       | 28.3 Arms @ 240 Vac<br>48 Arms @ 120 Vac  |                            |                            |                            |
| Max. output power                         | 6000 W @ 240 Vac<br>5760 W @ 120 Vac  |                            |                            |                            |
| Apparent output power                     | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |                            |                            |                            |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |                            |                            |                            |
| Max. output overcurrent protection        | 60 A for one inverter   |                            |                            |                            |
| <b>Stand-alone</b>                        |   |                            |                            |                            |
| Range of operating DC voltage             | 42 -60 Vdc  |                            |                            |                            |
| Max. operating current                    | 180 Adc   |                            |                            |                            |
| Max. input short circuit current          | 3000 Adc for one inverter   |                            |                            |                            |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |                            |                            |                            |
| Output frequency                          | 60 Hz   |                            |                            |                            |
| Max. output current                       | 28 Arms @ 240 Vac<br>48 Arms @ 120 Vac  |                            |                            |                            |
| Max. output power                         | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |                            |                            |                            |
| Apparent output power                     | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |                            |                            |                            |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |                            |                            |                            |
| Max. output over current protection       | 30 A for one inverter   |                            |                            |                            |
| <b>General Data</b>                       |   |                            |                            |                            |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |                            |                            |                            |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |                            |                            |                            |
| Install Location                          | Indoor use  |                            |                            |                            |
| Protection Class                          | IP20  |                            |                            |                            |

**7.0 Illustrations**

**Illustration 4a - Ratings**

| Model                                     | 51.2-100V6-XW Pro<br>6.8K1  | 51.2-100V7-XW Pro<br>6.8K1 | 51.2-100V8-XW Pro<br>6.8K1 | 51.2-100V9-XW Pro<br>6.8K1 |
|---|---|----------------------------|----------------------------|----------------------------|
| <b>Battery data</b>                       |   |                            |                            |                            |
| Battery type                              | LiFePO4   |                            |                            |                            |
| Total capacity                            | 600Ah   | 700Ah                      | 800Ah                      | 900Ah                      |
| Total energy                              | 30.72kWh  | 35.84kWh                   | 40.96kWh                   | 46.08kWh                   |
| Battery voltage range                     | 44.8-57.6 d.c.V   |                            |                            |                            |
| Nominal voltage                           | 51.2 d.c.V  |                            |                            |                            |
| Max. charge current                       | 140 d.c.A   | 140 d.c.A                  | 140 d.c.A                  | 140 d.c.A                  |
| Max. discharge current                    | 140 d.c.A   | 140 d.c.A                  | 140 d.c.A                  | 140 d.c.A                  |
| Parallel Number                           | 1S6P  | 1S7P                       | 1S8P                       | 1S9P                       |
| <b>Grid-interactive mode</b>              |   |                            |                            |                            |
| Range of operating DC voltage             | 47-58 Vdc   |                            |                            |                            |
| Max. operating current                    | 160 Adc   |                            |                            |                            |
| Max. input short circuit current          | 3000 Adc for one inverter   |                            |                            |                            |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |                            |                            |                            |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |                            |                            |                            |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |                            |                            |                            |
| Nominal output voltage                    | 240 Vac or 120 Vac  |                            |                            |                            |
| Max. output current                       | 28.3 Arms @ 240 Vac<br>48 Arms @ 120 Vac  |                            |                            |                            |
| Max. output power                         | 6000 W @ 240 Vac<br>5760 W @ 120 Vac  |                            |                            |                            |
| Apparent output power                     | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |                            |                            |                            |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |                            |                            |                            |
| Max. output overcurrent protection        | 60 A for one inverter   |                            |                            |                            |
| <b>Stand-alone</b>                        |   |                            |                            |                            |
| Range of operating DC voltage             | 42 -60 Vdc  |                            |                            |                            |
| Max. operating current                    | 180 Adc   |                            |                            |                            |
| Max. input short circuit current          | 3000 Adc for one inverter   |                            |                            |                            |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |                            |                            |                            |
| Output frequency                          | 60 Hz   |                            |                            |                            |
| Max. output current                       | 28 Arms @ 240 Vac<br>48 Arms @ 120 Vac  |                            |                            |                            |
| Max. output power                         | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |                            |                            |                            |
| Apparent output power                     | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |                            |                            |                            |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |                            |                            |                            |
| Max. output over current protection       | 30 A for one inverter   |                            |                            |                            |
| <b>General Data</b>                       |   |                            |                            |                            |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |                            |                            |                            |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |                            |                            |                            |
| Install Location                          | Indoor use  |                            |                            |                            |
| Protection Class                          | IP20  |                            |                            |                            |

**7.0 Illustrations**

**Illustration 4b - Ratings**

| Model                                     | 51.2-100V10-XW Pro<br>6.8K1   | 51.2-100V11-XW Pro<br>6.8K1 | 51.2-100V12-XW Pro<br>6.8K1 | 51.2-100V13-XW Pro<br>6.8K1 |
|---|---|-----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                             |                             |                             |
| Battery type                              | LiFePO4   |                             |                             |                             |
| Total capacity                            | 1000Ah  | 1100Ah                      | 1200Ah                      | 1300Ah                      |
| Total energy                              | 51.2kWh   | 56.32kWh                    | 61.44kWh                    | 66.56kWh                    |
| Battery voltage range                     | 44.8-57.6 d.c.V   |                             |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                             |                             |                             |
| Max. charge current                       | 140 d.c.A   | 140 d.c.A                   | 140 d.c.A                   | 140 d.c.A                   |
| Max. discharge current                    | 140 d.c.A   | 140 d.c.A                   | 140 d.c.A                   | 140 d.c.A                   |
| Parallel Number                           | 1S10P   | 1S11P                       | 1S12P                       | 1S13P                       |
| <b>Grid-interactive mode</b>              |   |                             |                             |                             |
| Range of operating DC voltage             | 47-58 Vdc   |                             |                             |                             |
| Max. operating current                    | 160 Adc   |                             |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                             |                             |                             |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |                             |                             |                             |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |                             |                             |                             |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |                             |                             |                             |
| Nominal output voltage                    | 240 Vac or 120 Vac  |                             |                             |                             |
| Max. output current                       | 28.3 Arms @ 240 Vac<br>48 Arms @ 120 Vac  |                             |                             |                             |
| Max. output power                         | 6000 W @ 240 Vac<br>5760 W @ 120 Vac  |                             |                             |                             |
| Apparent output power                     | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |                             |                             |                             |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |                             |                             |                             |
| Max. output overcurrent protection        | 60 A for one inverter   |                             |                             |                             |
| <b>Stand-alone</b>                        |   |                             |                             |                             |
| Range of operating DC voltage             | 42 -60 Vdc  |                             |                             |                             |
| Max. operating current                    | 180 Adc   |                             |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                             |                             |                             |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |                             |                             |                             |
| Output frequency                          | 60 Hz   |                             |                             |                             |
| Max. output current                       | 28 Arms @ 240 Vac<br>48 Arms @ 120 Vac  |                             |                             |                             |
| Max. output power                         | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |                             |                             |                             |
| Apparent output power                     | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |                             |                             |                             |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |                             |                             |                             |
| Max. output over current protection       | 30 A for one inverter   |                             |                             |                             |
| <b>General Data</b>                       |   |                             |                             |                             |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |                             |                             |                             |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |                             |                             |                             |
| Install Location                          | Indoor use  |                             |                             |                             |
| Protection Class                          | IP20  |                             |                             |                             |

**7.0 Illustrations**

**Illustration 4c - Ratings**

|   |   |
|---|---|
| Model                                     | 51.2-100V14-XW Pro 6.8K1  |
| Battery data                              |   |
| Battery type                              | LiFePO4   |
| Total capacity                            | 1400Ah  |
| Total energy                              | 71.68kWh  |
| Battery voltage range                     | 44.8-57.6 d.c.V   |
| Nominal voltage                           | 51.2 d.c.V  |
| Max. charge current                       | 140 d.c.A   |
| Max. discharge current                    | 140 d.c.A   |
| Parallel Number                           | 1S14P   |
| Grid-interactive mode                     |   |
| Range of operating DC voltage             | 47-58 Vdc   |
| Max. operating current                    | 160 Adc   |
| Max. input short circuit current          | 3000 Adc for one inverter   |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |
| Nominal output voltage                    | 240 Vac or 120 Vac  |
| Max. output current                       | 28.3 Arms @ 240 Vac<br>48 Arms @ 120 Vac  |
| Max. output power                         | 6000 W @ 240 Vac<br>5760 W @ 120 Vac  |
| Apparent output power                     | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |
| Max. output overcurrent protection        | 60 A for one inverter   |
| Stand-alone                               |   |
| Range of operating DC voltage             | 42 -60 Vdc  |
| Max. operating current                    | 180 Adc   |
| Max. input short circuit current          | 3000 Adc for one inverter   |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |
| Output frequency                          | 60 Hz   |
| Max. output current                       | 28 Arms @ 240 Vac<br>48 Arms @ 120 Vac  |
| Max. output power                         | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |
| Apparent output power                     | 6800 W @ 240 Vac<br>5760 W @ 120 Vac  |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |
| Max. output over current protection       | 30 A for one inverter   |
| General Data                              |   |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |
| Install Location                          | Indoor use  |
| Protection Class                          | IP20  |

**7.0 Illustrations**

**Illustration 4d - Ratings**

| Model                                     | 51.2-100V4-XW Pro<br>6.8K2  | 51.2-100V5-XW Pro<br>6.8K2 | 51.2-100V6-XW Pro<br>6.8K2 | 51.2-100V7-XW Pro<br>6.8K2 |
|---|---|----------------------------|----------------------------|----------------------------|
| Battery data                              |   |                            |                            |                            |
| Battery type                              | LiFePO4   |                            |                            |                            |
| Total capacity                            | 400Ah   | 500Ah                      | 600Ah                      | 700Ah                      |
| Total energy                              | 20.48kWh  | 25.6kWh                    | 30.72kWh                   | 35.84kWh                   |
| Battery voltage range                     | 44.8-57.6 d.c.V   |                            |                            |                            |
| Nominal voltage                           | 51.2 d.c.V  |                            |                            |                            |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                  | 280 d.c.A                  | 280 d.c.A                  |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                  | 280 d.c.A                  | 280 d.c.A                  |
| Parallel Number                           | 1S4P  | 1S5P                       | 1S6P                       | 1S7P                       |
| Grid-interactive mode                     |   |                            |                            |                            |
| Range of operating DC voltage             | 47-58 Vdc   |                            |                            |                            |
| Max. operating current                    | 320 Adc   |                            |                            |                            |
| Max. input short circuit current          | 3000 Adc for one inverter   |                            |                            |                            |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |                            |                            |                            |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |                            |                            |                            |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |                            |                            |                            |
| Nominal output voltage                    | 240 Vac or 120 Vac  |                            |                            |                            |
| Max. output current                       | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                            |                            |                            |
| Max. output power                         | 12000 W @ 240 Vac<br>11520 W @ 120 Vac  |                            |                            |                            |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                            |                            |                            |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |                            |                            |                            |
| Max. output overcurrent protection        | 60 A for one inverter   |                            |                            |                            |
| Stand-alone                               |   |                            |                            |                            |
| Range of operating DC voltage             | 42 -60 Vdc  |                            |                            |                            |
| Max. operating current                    | 360 Adc   |                            |                            |                            |
| Max. input short circuit current          | 3000 Adc for one inverter   |                            |                            |                            |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |                            |                            |                            |
| Output frequency                          | 60 Hz   |                            |                            |                            |
| Max. output current                       | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                            |                            |                            |
| Max. output power                         | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                            |                            |                            |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                            |                            |                            |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |                            |                            |                            |
| Max. output over current protection       | 30 A for one inverter   |                            |                            |                            |
| General Data                              |   |                            |                            |                            |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |                            |                            |                            |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |                            |                            |                            |
| Install Location                          | Indoor use  |                            |                            |                            |
| Protection Class                          | IP20  |                            |                            |                            |

**7.0 Illustrations**

**Illustration 4e - Ratings**

| Model                                     | 51.2-100V8-XW Pro<br>6.8K2  | 51.2-100V9-XW Pro<br>6.8K2 | 51.2-100V10-XW Pro<br>6.8K2 | 51.2-100V11-XW Pro<br>6.8K2 |
|---|---|----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                            |                             |                             |
| Battery type                              | LiFePO4   |                            |                             |                             |
| Total capacity                            | 800Ah   | 900Ah                      | 1000Ah                      | 1100Ah                      |
| Total energy                              | 40.96kWh  | 46.08kWh                   | 51.2kWh                     | 56.32kWh                    |
| Battery voltage range                     | 44.8-57.6 d.c.V   |                            |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                            |                             |                             |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                  | 280 d.c.A                   | 280 d.c.A                   |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                  | 280 d.c.A                   | 280 d.c.A                   |
| Parallel Number                           | 1S8P  | 1S9P                       | 1S10P                       | 1S11P                       |
| <b>Grid-interactive mode</b>              |   |                            |                             |                             |
| Range of operating DC voltage             | 47-58 Vdc   |                            |                             |                             |
| Max. operating current                    | 320 Adc   |                            |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                            |                             |                             |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |                            |                             |                             |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |                            |                             |                             |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |                            |                             |                             |
| Nominal output voltage                    | 240 Vac or 120 Vac  |                            |                             |                             |
| Max. output current                       | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                            |                             |                             |
| Max. output power                         | 12000 W @ 240 Vac<br>11520 W @ 120 Vac  |                            |                             |                             |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                            |                             |                             |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |                            |                             |                             |
| Max. output overcurrent protection        | 60 A for one inverter   |                            |                             |                             |
| <b>Stand-alone</b>                        |   |                            |                             |                             |
| Range of operating DC voltage             | 42 -60 Vdc  |                            |                             |                             |
| Max. operating current                    | 360 Adc   |                            |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                            |                             |                             |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |                            |                             |                             |
| Output frequency                          | 60 Hz   |                            |                             |                             |
| Max. output current                       | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                            |                             |                             |
| Max. output power                         | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                            |                             |                             |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                            |                             |                             |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |                            |                             |                             |
| Max. output over current protection       | 30 A for one inverter   |                            |                             |                             |
| <b>General Data</b>                       |   |                            |                             |                             |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |                            |                             |                             |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |                            |                             |                             |
| Install Location                          | Indoor use  |                            |                             |                             |
| Protection Class                          | IP20  |                            |                             |                             |

**7.0 Illustrations**

**Illustration 4f - Ratings**

| Model                                     | 51.2-100V12-XW Pro<br>6.8K2   | 51.2-100V13-XW Pro<br>6.8K2 | 51.2-100V14-XW Pro<br>6.8K2 | 51.2-100V15-XW Pro<br>6.8K2 |
|---|---|-----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                             |                             |                             |
| Battery type                              | LiFePO4   |                             |                             |                             |
| Total capacity                            | 1200Ah  | 1300Ah                      | 1400Ah                      | 1500Ah                      |
| Total energy                              | 61.44kWh  | 66.56kWh                    | 71.68kWh                    | 76.8kWh                     |
| Battery voltage range                     | 44.8-57.6 d.c.V   |                             |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                             |                             |                             |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Parallel Number                           | 1S12P   | 1S13P                       | 1S14P                       | 1S15P                       |
| <b>Grid-interactive mode</b>              |   |                             |                             |                             |
| Range of operating DC voltage             | 47-58 Vdc   |                             |                             |                             |
| Max. operating current                    | 320 Adc   |                             |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                             |                             |                             |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |                             |                             |                             |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |                             |                             |                             |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |                             |                             |                             |
| Nominal output voltage                    | 240 Vac or 120 Vac  |                             |                             |                             |
| Max. output current                       | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                             |                             |                             |
| Max. output power                         | 12000 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |                             |                             |                             |
| Max. output overcurrent protection        | 60 A for one inverter   |                             |                             |                             |
| <b>Stand-alone</b>                        |   |                             |                             |                             |
| Range of operating DC voltage             | 42 -60 Vdc  |                             |                             |                             |
| Max. operating current                    | 360 Adc   |                             |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                             |                             |                             |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |                             |                             |                             |
| Output frequency                          | 60 Hz   |                             |                             |                             |
| Max. output current                       | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                             |                             |                             |
| Max. output power                         | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |                             |                             |                             |
| Max. output over current protection       | 30 A for one inverter   |                             |                             |                             |
| <b>General Data</b>                       |   |                             |                             |                             |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |                             |                             |                             |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |                             |                             |                             |
| Install Location                          | Indoor use  |                             |                             |                             |
| Protection Class                          | IP20  |                             |                             |                             |

**7.0 Illustrations**

**Illustration 4g - Ratings**

| Model                                     | 51.2-100V16-XW Pro<br>6.8K2   | 51.2-100V17-XW Pro<br>6.8K2 | 51.2-100V18-XW Pro<br>6.8K2 | 51.2-100V19-XW Pro<br>6.8K2 |
|---|---|-----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                             |                             |                             |
| Battery type                              | LiFePO4   |                             |                             |                             |
| Total capacity                            | 1600Ah  | 1700Ah                      | 1800Ah                      | 1900Ah                      |
| Total energy                              | 81.92kWh  | 87.04kWh                    | 92.16kWh                    | 97.28kWh                    |
| Battery voltage range                     | 44.8-57.6 d.c.V   |                             |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                             |                             |                             |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Parallel Number                           | 1S16P   | 1S17P                       | 1S18P                       | 1S19P                       |
| <b>Grid-interactive mode</b>              |   |                             |                             |                             |
| Range of operating DC voltage             | 47-58 Vdc   |                             |                             |                             |
| Max. operating current                    | 320 Adc   |                             |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                             |                             |                             |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |                             |                             |                             |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |                             |                             |                             |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |                             |                             |                             |
| Nominal output voltage                    | 240 Vac or 120 Vac  |                             |                             |                             |
| Max. output current                       | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                             |                             |                             |
| Max. output power                         | 12000 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |                             |                             |                             |
| Max. output overcurrent protection        | 60 A for one inverter   |                             |                             |                             |
| <b>Stand-alone</b>                        |   |                             |                             |                             |
| Range of operating DC voltage             | 42 -60 Vdc  |                             |                             |                             |
| Max. operating current                    | 360 Adc   |                             |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                             |                             |                             |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |                             |                             |                             |
| Output frequency                          | 60 Hz   |                             |                             |                             |
| Max. output current                       | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                             |                             |                             |
| Max. output power                         | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |                             |                             |                             |
| Max. output over current protection       | 30 A for one inverter   |                             |                             |                             |
| <b>General Data</b>                       |   |                             |                             |                             |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |                             |                             |                             |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |                             |                             |                             |
| Install Location                          | Indoor use  |                             |                             |                             |
| Protection Class                          | IP20  |                             |                             |                             |

**7.0 Illustrations**

**Illustration 4h - Ratings**

| Model                                     | 51.2-100V20-XW Pro<br>6.8K2   | 51.2-100V21-XW Pro<br>6.8K2 | 51.2-100V22-XW Pro<br>6.8K2 | 51.2-100V23-XW Pro<br>6.8K2 |
|---|---|-----------------------------|-----------------------------|-----------------------------|
| Battery data                              |   |                             |                             |                             |
| Battery type                              | LiFePO4   |                             |                             |                             |
| Total capacity                            | 2000Ah  | 2100Ah                      | 2200Ah                      | 2300Ah                      |
| Total energy                              | 102.4kWh  | 107.52kWh                   | 112.64kWh                   | 117.76kWh                   |
| Battery voltage range                     | 44.8-57.6 d.c.V   |                             |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                             |                             |                             |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Parallel Number                           | 1S20P   | 1S21P                       | 1S22P                       | 1S23P                       |
| Grid-interactive mode                     |   |                             |                             |                             |
| Range of operating DC voltage             | 47-58 Vdc   |                             |                             |                             |
| Max. operating current                    | 320 Adc   |                             |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                             |                             |                             |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |                             |                             |                             |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |                             |                             |                             |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |                             |                             |                             |
| Nominal output voltage                    | 240 Vac or 120 Vac  |                             |                             |                             |
| Max. output current                       | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                             |                             |                             |
| Max. output power                         | 12000 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |                             |                             |                             |
| Max. output overcurrent protection        | 60 A for one inverter   |                             |                             |                             |
| Stand-alone                               |   |                             |                             |                             |
| Range of operating DC voltage             | 42 -60 Vdc  |                             |                             |                             |
| Max. operating current                    | 360 Adc   |                             |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                             |                             |                             |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |                             |                             |                             |
| Output frequency                          | 60 Hz   |                             |                             |                             |
| Max. output current                       | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                             |                             |                             |
| Max. output power                         | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |                             |                             |                             |
| Max. output over current protection       | 30 A for one inverter   |                             |                             |                             |
| General Data                              |   |                             |                             |                             |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |                             |                             |                             |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |                             |                             |                             |
| Install Location                          | Indoor use  |                             |                             |                             |
| Protection Class                          | IP20  |                             |                             |                             |

**7.0 Illustrations**

**Illustration 4i - Ratings**

| Model                                     | 51.2-100V24-XW Pro<br>6.8K2   | 51.2-100V25-XW Pro<br>6.8K2 | 51.2-100V26-XW Pro<br>6.8K2 | 51.2-100V27-XW Pro<br>6.8K2 |
|---|---|-----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                             |                             |                             |
| Battery type                              | LiFePO4   |                             |                             |                             |
| Total capacity                            | 2400Ah  | 2500Ah                      | 2600Ah                      | 2700Ah                      |
| Total energy                              | 122.88kWh   | 128kWh                      | 133.12kWh                   | 138.24kWh                   |
| Battery voltage range                     | 44.8-57.6 d.c.V   |                             |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                             |                             |                             |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Parallel Number                           | 1S24P   | 1S25P                       | 1S26P                       | 1S27P                       |
| <b>Grid-interactive mode</b>              |   |                             |                             |                             |
| Range of operating DC voltage             | 47-58 Vdc   |                             |                             |                             |
| Max. operating current                    | 320 Adc   |                             |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                             |                             |                             |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |                             |                             |                             |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |                             |                             |                             |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |                             |                             |                             |
| Nominal output voltage                    | 240 Vac or 120 Vac  |                             |                             |                             |
| Max. output current                       | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                             |                             |                             |
| Max. output power                         | 12000 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |                             |                             |                             |
| Max. output overcurrent protection        | 60 A for one inverter   |                             |                             |                             |
| <b>Stand-alone</b>                        |   |                             |                             |                             |
| Range of operating DC voltage             | 42 -60 Vdc  |                             |                             |                             |
| Max. operating current                    | 360 Adc   |                             |                             |                             |
| Max. input short circuit current          | 3000 Adc for one inverter   |                             |                             |                             |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |                             |                             |                             |
| Output frequency                          | 60 Hz   |                             |                             |                             |
| Max. output current                       | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |                             |                             |                             |
| Max. output power                         | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |                             |                             |                             |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |                             |                             |                             |
| Max. output over current protection       | 30 A for one inverter   |                             |                             |                             |
| <b>General Data</b>                       |   |                             |                             |                             |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |                             |                             |                             |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |                             |                             |                             |
| Install Location                          | Indoor use  |                             |                             |                             |
| Protection Class                          | IP20  |                             |                             |                             |

**7.0 Illustrations**

**Illustration 4j - Ratings**

|   |   |
|---|---|
| Model                                     | 51.2-100V28-XW Pro 6.8K2  |
| Battery data                              |   |
| Battery type                              | LiFePO4   |
| Total capacity                            | 2800Ah  |
| Total energy                              | 143.36kWh   |
| Battery voltage range                     | 44.8-57.6 d.c.V   |
| Nominal voltage                           | 51.2 d.c.V  |
| Max. charge current                       | 280 d.c.A   |
| Max. discharge current                    | 280 d.c.A   |
| Parallel Number                           | 1S28P   |
| Grid-interactive mode                     |   |
| Range of operating DC voltage             | 47-58 Vdc   |
| Max. operating current                    | 320 Adc   |
| Max. input short circuit current          | 3000 Adc for one inverter   |
| Output power factor rating                | >0.95 (adjustable 0.8 leading to 0.8 lagging)   |
| Operating voltage range                   | 211-264 V ac @ 240 Vac<br>105.6-132 V ac @ 120 Vac  |
| Operating frequency range                 | 59.4 Hz ~ 60.4 Hz   |
| Nominal output voltage                    | 240 Vac or 120 Vac  |
| Max. output current                       | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |
| Max. output power                         | 12000 W @ 240 Vac<br>11520 W @ 120 Vac  |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |
| Max. output fault current and duration    | 425A pk @ 0.4 milliseconds for one inverter   |
| Max. output overcurrent protection        | 60 A for one inverter   |
| Stand-alone                               |   |
| Range of operating DC voltage             | 42 -60 Vdc  |
| Max. operating current                    | 360 Adc   |
| Max. input short circuit current          | 3000 Adc for one inverter   |
| Nominal output voltage                    | 120 Vac/ 240 Vac  |
| Output frequency                          | 60 Hz   |
| Max. output current                       | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac  |
| Max. output power                         | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |
| Apparent output power                     | 13600 W @ 240 Vac<br>11520 W @ 120 Vac  |
| Maximum Output Fault Current and Duration | 925A pk @ 0.5 milliseconds for one inverter   |
| Max. output over current protection       | 30 A for one inverter   |
| General Data                              |   |
| Charging Temperature Range                | -5°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -5°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max)   |
| Discharging Temperature Range             | -20°C to 60°C (Derated operation for elevated ambient temperatures: rated continuous power from -20°C to 25°C. Operates at reduced power at temperatures above these ratings to 60°C max) |
| Install Location                          | Indoor use  |
| Protection Class                          | IP20  |

| 8.0 Test Summary  |  |  |   |
|---|--|--|---|
| Evaluation Period   | 29-Feb-2024 to 10-July-2024  |  | Project No. 240229127GZU                      |
| Sample Rec. Date  | 29-Feb-2024  | Condition                              | Prototype                                     |
|   |  |  | Sample ID. S240229127-011~012, S240229127-017 |
| Test Location   | Intertek Testing Services Shenzhen Ltd. Guangzhou Branch<br>Room 101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road,<br>HuangpuDistrict Guangzhou, Guangdong, China |  |   |
| Test Procedure  | Testing Lab  |  |   |
| Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria. |  |  |   |
| The following tests were performed:   |  |  |   |
| Test Description  |  | [ANSI/CAN/UL 9540:2023 Ed.3]<br>Clause |   |
| Normal Operations Test  |  | 30                                     |   |
| Dielectric Voltage Withstand Test   |  | 32                                     |   |
| Impulse Test  |  | 33                                     |   |
| Equipment Grounding and Bonding Test  |  | 34                                     |   |
| Insulation Resistance Test  |  | 35                                     |   |
| Electromagnetic Immunity Tests  |  | 36                                     |   |

| 8.1 Signatures   |                 |              |                  |
|--|-----------------|--------------|------------------|
| A representative sample of the product covered by this report has been evaluated and found to comply with the applicable requirements of the standards indicated in Section 1.0. |                 |              |                  |
| Completed by:  | Qifa Lai        | Reviewed by: | Mira Xiao        |
| Title:   | Engineer        | Title:       | Reviewer         |
| Signature:   | <i>Qifa Lai</i> | Signature:   | <i>Mira Xiao</i> |

**9.0 Correlation Page For Multiple Listings**

The following products, which are identical to those identified in this report except for model number and Listee name, are authorized to bear the ETL label under provisions of the Intertek Multiple Listing Program.

|              |   |
|--------------|---|
| BASIC LISTEE | Energie Volthium Inc                                  |
| Address      | 2600 Boulevard Ford #100, Chateauguay, Quebec J6J 4Z2 |
| Country      | Canada  |
| Product      | Energy Storge Systems                                 |

|   |                     |                          |                     |  |  |
|---|---------------------|--------------------------|---------------------|--|--|
| MULTIPLE LISTEE 1   | None                |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| Brand Name  |                     |                          |                     |  |  |
| ASSOCIATED MANUFACTURER   |                     |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| <table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MULTIPLE LISTEE 1 MODELS</td> <td style="width: 50%;">BASIC LISTEE MODELS</td> </tr> <tr> <td> </td> <td> </td> </tr> </table> |                     | MULTIPLE LISTEE 1 MODELS | BASIC LISTEE MODELS |  |  |
| MULTIPLE LISTEE 1 MODELS  | BASIC LISTEE MODELS |                          |                     |  |  |
|   |                     |                          |                     |  |  |

|   |                     |                          |                     |  |  |
|---|---------------------|--------------------------|---------------------|--|--|
| MULTIPLE LISTEE 2   | None                |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| Brand Name  |                     |                          |                     |  |  |
| ASSOCIATED MANUFACTURER   |                     |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| <table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MULTIPLE LISTEE 2 MODELS</td> <td style="width: 50%;">BASIC LISTEE MODELS</td> </tr> <tr> <td> </td> <td> </td> </tr> </table> |                     | MULTIPLE LISTEE 2 MODELS | BASIC LISTEE MODELS |  |  |
| MULTIPLE LISTEE 2 MODELS  | BASIC LISTEE MODELS |                          |                     |  |  |
|   |                     |                          |                     |  |  |

|   |                     |                          |                     |  |  |
|---|---------------------|--------------------------|---------------------|--|--|
| MULTIPLE LISTEE 3   | None                |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| Brand Name  |                     |                          |                     |  |  |
| ASSOCIATED MANUFACTURER   |                     |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| <table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MULTIPLE LISTEE 3 MODELS</td> <td style="width: 50%;">BASIC LISTEE MODELS</td> </tr> <tr> <td> </td> <td> </td> </tr> </table> |                     | MULTIPLE LISTEE 3 MODELS | BASIC LISTEE MODELS |  |  |
| MULTIPLE LISTEE 3 MODELS  | BASIC LISTEE MODELS |                          |                     |  |  |
|   |                     |                          |                     |  |  |

## 10.0 General Information

The Applicant and Manufacturer have agreed to produce, test and label ETL Listed products in accordance with the requirements of this Report. The Manufacturer has also agreed to notify Intertek and to request authorization prior to using alternate parts, components or materials.

### COMPONENTS

Components used shall be those itemized in this Intertek report covering the product, including any amendments and/or revisions.

### LISTING MARK

The ETL Listing mark applied to the products shall either be separable in form, such as labels purchased from Intertek, or on a product nameplate or other media only as specifically authorized by Intertek. Use of the mark is subject to the control of Intertek.

The mark must include the following four items:

- 1) applicable country identifiers "US" and/or "C" or "US", "C" and "EU"
- 2) the word "Listed" or "Classified" or "Recognized Component" (whichever is appropriate)
- 3) a control number issued by Intertek
- 4) a product descriptor that identifies the standards used for certification. Example:

**For US standards**, the words, "Conforms to" shall appear with the standard number along with the word, "Standard" or "Std." Example: "Conforms to ANSI/UL Std. XX."

**For Canadian standards**, the words "Certified to CAN/CSA Standard CXX No. XX." shall be used, or abbreviated, "Cert. to CAN/CSA Std. CXX No. XX."

Can be used together when both standards are used.

**If all standards on the ATM have the same standard title**, the shared title or its abbreviation may be used in place of the examples above. Example: "Medical Electrical Equipment" or "MEE"; "Information Technology Equipment" or "ITE"; "Audio/Video Information And Communication Technology Equipment" or "A/V ICTE".

**Note: A facsimile must be submitted to Intertek, Attn: Follow-up Services for approval prior to use.**

The facsimile need not have a control number. A control number will be issued **after signed Certification Agreements** have been received by the Follow-up Services office, approval of the facsimile of your proposed Listing Mark, satisfactory completion of the Listing Report, and scheduling of a factory assessment in your facility.

### MANUFACTURING AND PRODUCTION TESTS

Manufacturing and Production Tests shall be performed as required in this Report.

### FOLLOW-UP SERVICE

Periodic unannounced audits of the manufacturing facility (and any locations authorized to apply the mark) shall be scheduled by Intertek. An audit report shall be issued after each visit. Special attention will be given to the following:

1. Conformance of the manufactured product to the descriptions in this Report.
2. Conformance of the use of the ETL mark with the requirements of this Report and the Certification Agreement.
3. Manufacturing changes.
4. Performance of specified Manufacturing and Production Tests.

In the event that the Intertek representative identifies non-conformance(s) to any provision of this Report, the Applicant shall take one or more of the following actions:

1. Correct the non-conformance.
2. Remove the ETL Mark from non-conforming product.
3. Contact the issuing product safety evaluation center for instructions.

### 10.1 Evaluation of Unlisted Components

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

**The Applicant will be notified, in writing, via the applicable contact methods, as defined in Section 1.0, when these components must be selected and sent to Component Evaluation Center (CEC) for re-evaluation.**

**Due to particular testing requirements, some components may be requested to be shipped to specific labs. Thus, specific shipment destination(s) for each sample will be provided in the written notification.**

Managing CEC Location:

Intertek Testing Services Shenzhen Limited Guangzhou Branch

ETL Component Evaluation Center

Room 101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu

District

Guangzhou, Guangdong, China

Attn: Ms. Joey Kuang

Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

**11.0 Manufacturing and Production Tests**

The manufacturer agrees to conduct the following Manufacturing and Production Tests as specified:

**Required Tests**

None



| 1.0 Reference and Address |   |                              |               |
|---------------------------|---|------------------------------|---------------|
| Report Number             | 240229127GZU-003  | Original Issued: 10-Jul-2024 | Revised: None |
| Standard(s)               | Energy Storage Systems and Equipment [ANSI/CAN/UL 9540:2023 Ed.3] |                              |               |
| Applicant                 | Energie Volthium Inc  | Manufacturer                 |               |
| Address                   | 2600 Boulevard Ford #100,<br>Chateauguay, Quebec J6J 4Z2          | Address                      |               |
| Country                   | Canada  | Country                      |               |
| Contact                   | Yanni Samson  | Contact                      |               |
| Phone                     | 514-989-9586  | Phone                        | --            |
| FAX                       | --  | FAX                          |               |
| Email                     | yanni.samson@volthium.com   | Email                        |               |


| <b>2.0 Product Description</b> |  |
|--------------------------------|--|
| Product                        | Energy Storage Systems   |
| Brand name                     |   |
| Description                    | The product covered by this report are intelligent energy storage systems. It includes an grid support hybrid inverter and a lithium iron battery system (LiFePO4). Installation should be located where specified in installation manual as well as in accordance with the National Electrical Code (NEC) and the Canadian Electrical Code (CEC).   |
| Models                         | 51.2-100V2–XW Pro 6.8K1, 51.2-100V3–XW Pro 6.8K1, 51.2-100V4–XW Pro 6.8K1, 51.2-100V5–XW Pro 6.8K1, 51.2-100V6–XW Pro 6.8K1, 51.2-100V7–XW Pro 6.8K1, 51.2-100V8–XW Pro 6.8K1, 51.2-100V9–XW Pro 6.8K1, 51.2-100V10–XW Pro 6.8K1, 51.2-100V11–XW Pro 6.8K1, 51.2-100V12–XW Pro 6.8K1, 51.2-100V13–XW Pro 6.8K1, 51.2-100V14–XW Pro 6.8K1, 51.2-100V4–XW Pro 6.8K2, 51.2-100V5–XW Pro 6.8K2, 51.2-100V6–XW Pro 6.8K2, 51.2-100V7–XW Pro 6.8K2, 51.2-100V8–XW Pro 6.8K2, 51.2-100V9–XW Pro 6.8K2, 51.2-100V10–XW Pro 6.8K2, 51.2-100V11–XW Pro 6.8K2, 51.2-100V12–XW Pro 6.8K2, 51.2-100V13–XW Pro 6.8K2, 51.2-100V14–XW Pro 6.8K2, 51.2-100V15–XW Pro 6.8K2, 51.2-100V16–XW Pro 6.8K2, 51.2-100V17–XW Pro 6.8K2, 51.2-100V18–XW Pro 6.8K2, 51.2-100V19–XW Pro 6.8K2, 51.2-100V20–XW Pro 6.8K2, 51.2-100V21–XW Pro 6.8K2, 51.2-100V22–XW Pro 6.8K2, 51.2-100V23–XW Pro 6.8K2, 51.2-100V24–XW Pro 6.8K2, 51.2-100V25–XW Pro 6.8K2, 51.2-100V26–XW Pro 6.8K2, 51.2-100V27–XW Pro 6.8K2, 51.2-100V28–XW Pro 6.8K2 |
| Model Similarity               | All models are identical only except the incorporating grid support hybrid inverter and the number of battery moduels.<br>About series model 51.2-100Vx-XW Pro 6.8Kx<br>The suffix "51.2-100" denotes the battery module.<br>The suffix "Vx" denotes the number of battery moduels (2 to 28).<br>The suffix "XW Pro 6.8K" denotes the maximum output power 6.8K of PCS.<br>The last suffix "x" denotes the number of inverter (1 to 2).<br>The battery module model 51.2-100-R-H-3U-C is identical to 51.2-100-R-3U-C, except that the internal heating sheets can be controlled by software.<br>The wall mounted energy storge system only for model that system energy less than or equal to 20kWh.  |
| Ratings                        | Please refer to section 7.0, Illustration 3, 3a to 3u for details.   |
| Other Ratings                  | Please refer to section 7.0, Illustration 3, 3a to 3u for details.   |

**3.0 Product Photographs**

**Photo 1 - Overall view of the battery system**



**Photo 2 - Overall view of the inverter**

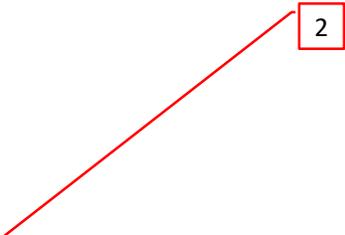

| 4.0 Critical Components |                       |                             |                                      |                           |  |                                    |
|-------------------------|-----------------------|-----------------------------|--------------------------------------|---------------------------|--|------------------------------------|
| Photo #                 | Item no. <sup>1</sup> | Name                        | Manufacturer/ trademark <sup>2</sup> | Type / model <sup>2</sup> | Technical data and securement means  | Mark(s) of conformity <sup>3</sup> |
| 1                       | 1                     | Lithium iron battery system | Energie Volthium Inc                 | 51.2-100-R-3U-C           | May be used with 2 to 28 battery modules for a system<br>Type of battery: LiFePO4<br>Normal Voltage: 51.2Vdc<br>Max. continue charging current: 70A<br>Max. continue discharging current: 100A<br>Rated capacity: 100Ah<br>Rated energy: 5.12kWh   | cETLus                             |
|                         |                       |                             |                                      | 51.2-100-R-H-3U-C         | May be used with 2 to 28 battery modules for a system<br>Type of battery: LiFePO4<br>Normal Voltage: 51.2Vdc<br>Max. continue charging current: 70A<br>Max. continue discharging current: 100A<br>Rated capacity: 100Ah<br>Rated energy: 5.12kWh   | cETLus                             |
| 2                       | 2                     | Inverter                    | Schneider Electric Solar Inc.        | XW Pro 6848 NA            | Charge mode: 40-64 Vdc, charged and discharge current: 140 d.c.A<br>Grid side: 208/240a.c.V, max 28.3 Arms(240 Vac), max 48 Arms(120 Vac), max.6800VA(240 Vac), max.5760VA(120 Vac), 60Hz<br>off-grid side: 120/240 Vac, max 28 Arms(240 Vac), max 48 Arms(120 Vac), max.6800VA(240 Vac), max.5760VA(120 Vac), 60Hz<br>Enclosure type: | cCSAus                             |

| 4.0 Critical Components |                       |  |  |                           |                                     |                                    |
|-------------------------|-----------------------|--|--|---------------------------|-------------------------------------|------------------------------------|
| Photo #                 | Item no. <sup>1</sup> | Name   | Manufacturer/ trademark <sup>2</sup>             | Type / model <sup>2</sup> | Technical data and securement means | Mark(s) of conformity <sup>3</sup> |
| 1                       | 3                     | Copper bar   | Dongguan Zhongzhi Electronics Technology Co.,Ltd | 528*25*4                  | COOPER, 528*25*4, pressed nickel    | NR                                 |
|                         |                       |  | Various  | Various                   | COOPER, 528*25*4, pressed nickel    | NR                                 |
|                         |                       |  | Dongguan Zhongzhi Electronics Technology Co.,Ltd | 200*25*4                  | COOPER, 200*25*4, pressed nickel    | NR                                 |
|                         |                       |  | Various  | Various                   | COOPER, 200*25*4, pressed nickel    | NR                                 |
| 1                       | 4                     | Tube   | PENGYUAN ELECTRONICS MATERIAL CO LTD             | RDHF                      | 600V, 125°C, thickness: 1-2mm       | cURus                              |
|                         |                       |  | Various  | Various                   | 600V, 125°C, thickness: 1-2mm       | cURus                              |
| 1                       | 5                     | Interconnecting cord per a battery port between inverter and battery (not shown) | SHENZHEN MYSUN INSULATION MATERIALS CO LTD       | 3512                      | 600V, 200°C, 2/0 AWG                | cURus                              |
|                         |                       |  | Various  | Various                   | 600V, 200°C, 2/0 AWG                | cURus                              |
| 1                       | 6                     | Label (not shown)  | Various  | Various                   | Adhesive-Type, Min. 80°C            | UR                                 |

NOTES:

1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.

2) "Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.

3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates Unlisted and only visual examination is necessary. "See 5.0" indicates Unlisted components or assemblies to be evaluated periodically refer to section 5.0 for details.

**5.0 Critical Unlisted CEC Components**

No Unlisted CEC components are used in this report.

## 6.0 Critical Features

Recognized Component - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

Listed Component - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

Unlisted Component - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

Critical Features/Components - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the product standard.

Construction Details - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.

1. Mechanical Assembly - Components such as switches, fuseholders, connectors, wiring terminals and display lamps are mounted and prevented from shifting or rotating by the use of lockwashers, starwashers, or other mounting format that prevents turning of the component.
2. Corrosion Protection - All ferrous metal parts are protected against corrosion by painting, plating or the equivalent.
3. Accessibility of Live Parts - All uninsulated live parts in primary circuitry are housed within a metal and non-metallic enclosure constructed with no openings other than those specifically described in Sections 4 and 5.
4. Grounding - All exposed dead-metal parts and all dead-metal parts within the enclosure that are exposed are connected to the grounding lead of the power supply cord or the equipment grounding terminal.
5. Polarized Connection - This product is provided with a polarized power supply connection. All single pole switches and fuses are connected only to the ungrounded supply circuit conductor.
6. Internal Wiring - Internal wiring is routed away from sharp or moving parts. Internal wiring leads terminating in soldered connections are made mechanically secure prior to soldering. Recognized Component separable (quick disconnect) connectors of the positive detent type, closed loop connectors, or other types specifically described in the text of this report are also acceptable as internal wiring terminals. At points where internal wiring passes through metal walls or partitions, the wiring insulation is protected against abrasion or damage by plastic bushings or grommets.
7. Markings - The product is marked as follows: Applicant's brand name, model number, date of manufacturer; electrical ratings.
8. Cautionary Markings - refer to Illustration 1 for details.
9. Installation, Operating and Safety Instructions - Instructions for installation and use of this product are provided by the manufacturer. Refer to Illustrations 2, 2a to 2r for details.

## 7.0 Illustrations

### Illustration 1 - Caution and warning labels



## WARNING / AVERTISSEMENT / ADVERTENCIA

Electric shock hazard.

Do not disassemble.

Do not hit or crush.

Do not connect in reverse  
or short circuit.

Do not expose to excessive heat

To Reduce the Risk of Injury,  
read all instructions

Risque d'électrocution.

chaleur excessive.

Ne pas démonter

Ne pas heurter ni écraser.

Ne branchez pas en marche

arrière ou en court-circuit.

Ne pas exposer à une chaleur excessive

Pour prévenir les blessures,  
lire toutes les instructions

Riesgo de shock eléctrico

No desarmar

No golpee ni aplaste

No se conecte en reversa o cortocircuito.

No exponga al calor excesivo

Para reducir el riesgo de contraer Injury,

lea todas las instrucciones

## 7.0 Illustrations

### Illustration 2 - User manual(partly)

## 2. Safety

### 2.1 Safety precautions

#### DANGER

##### Explosion risk

- Do not impact the battery with heavy objects.
- Do not squeeze or pierce the battery pack.
- Do not throw the battery pack into the fire.

#### WARNING

##### Fire risk

- Do not expose the battery pack to the condition over 80°C.
- Do not put the battery near a heat source, such as a fireplace.
- Do not expose the battery pack to direct sunlight or raining.

#### CAUTION

##### Electric shock risk

- Do not allow non-qualified person to disassemble the battery pack.
- Do not touch the battery pack with wet hands.
- Do not expose the battery pack to moisture or liquid environment.

#### NOTICE

##### Damage risk

- Do not short-circuit or reverse connect the battery.
- Do not use chargers or charging devices unapproved by the manufacturer to charge the battery.
- Do not mix batteries from different manufacturers or different kinds, types or brands.

### 2.2 Safety instructions

The battery has been designed and tested in accordance with international (such as UL, IEC, UN38.3 etc.)

## 7.0 Illustrations

### Illustration 2a - User manual(partly)

safety requirements. However, due to various factors during the whole lifetime process, Volthium cannot guarantee absolute safety, in order to prevent personal injury and property damage and ensure long-term operation of the battery, please do read the below section carefully to operate the battery and handle emergency situations.

#### 2.2.1 Safety gear

It is required to wear the following safety gear when installing and handling the battery pack.



Insulated gloves



Safety Glasses



Safety Shoes

#### 2.2.2 Emergency safety measures

##### Water invasion

Please cut off the AC power supply of the system first and then disconnect all switched under the premise of ensuring safety.

##### Electrolyte or gas leakage

If the battery pack leaks electrolyte, avoid contact with the leaking liquid or gas. If one is exposed to the leaked substance, immediately perform the actions described below.

- **Gas Inhalation:** Evacuate the people in the contaminated area and seek medical aid immediately.
- **Eye Contact:** Flush your eye with clean and flowing water for 15 min, and seek medical aid immediately.
- **Skin Contact:** Thoroughly rinse the exposed area with soap and water to be sure no chemical or soap is left on them, and seek medical aid immediately.
- **Ingestion:** Induce vomiting, and seek medical help immediately.

### ⚠ WARNING

In case of fire situations, please use carbon dioxide fire extinguisher rather than liquid to put out fires.

#### 2.2.3 Other Tips

- All the product are strictly inspected before shipment, please contact your supplier for replacement if you notice there's any defectives such as swelling.
- Do not disassemble batteries and components, otherwise the manufacturer will not be responsible for any damage caused by unauthorized disassembly or repair.
- Do enable the battery to be safely grounded before use to make sure the system in safe and normal operation.
- Please ensure that the electric parameters of these devices are compatible mutually before connecting the battery to other devices.
- Please take the environmental factors into careful considerations to ensure that the system can work in a suitable condition as the environment and storage methods have a certain impact on the service life and reliability of this product.

## 7.0 Illustrations

### Illustration 2b - User manual(partly)

#### 4.3 Start Installation

##### Qualified person

##### 4.3.1 Remainder

Please check again the following conditions or equipment whether meet the requirements before installation:

- Check if there's enough space for installation, and if the load-bearing capacity of the bracket or cabinet meets the weight requirements.
- Check whether the power cable pair(s) used meets the maximum current requirement for operation.
- Check whether the overall layout of power supply equipment and batteries at the construction site is reasonable.
- Check whether the installer is wearing anti-static wristband.
- Check whether there're two people on the construction site for installation work.
- Check if there's potential risks at location of installation site, e.g flooding, sun exposure, corrosion, and salt spray.

##### 4.3.2 Procedures

###### CAUTION

Injuries may result if the product is lifted incorrectly or dropped while being transported or mounted.  
Wear suitable personal protective equipment for all work on the product.

###### CAUTION

Ensure that no lines are laid in the wall which could be damaged when drilling holes.

##### 4.3.2.1 Rack mounted

**7.0 Illustrations**

**Illustration 2c - User manual(partly)**


|   |
|---|
| 1.Take the battery pack out from carton.  |
| 2.Get the Rack or cabinet ready and place it horizontally at a reasonable location.   |
| 3.Place the battery on the rack or cabinet tray via manual-lift, Insert the screws and fasten the battery to the rack or cabinet. |
| 4.Finish the cable connection   |

**4.3.2.2 Stack mounted**

|   |  |
|---|--|
| 1.Take the battery pack out from carton.  |  |
| 2.Remove the mounting ear from both side of the battery.  |    |
| 3.Install the stacking component at four corners of the battery.  |   |
| 4.Remove the hook on the stacking component of the bottom battery of each stack.                                      |  |
| 5.Put another battery on top of the previous module, and align the locating holes and connect the 4 lockers together. |  |



**7.0 Illustrations**

**Illustration 2d - User manual(partly)**

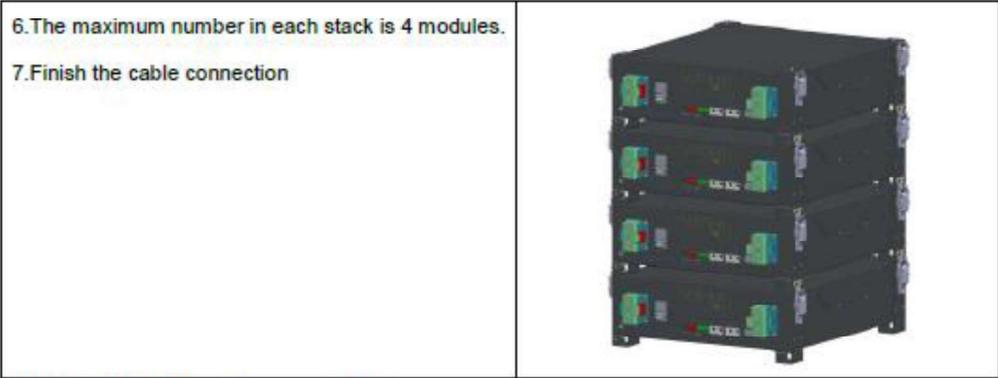


Note: Do not stack the batteries directly.

**4.3.2.1 Floor mounted**

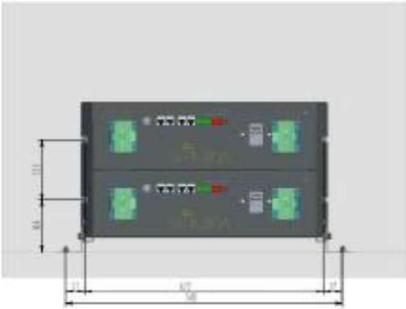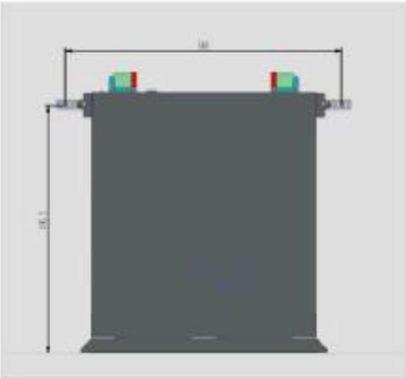


**7.0 Illustrations**

**Illustration 2e - User manual(partly)**
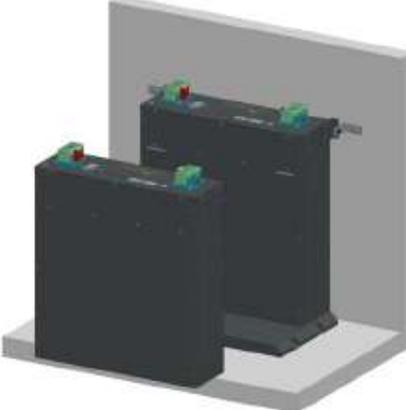
|  |  |
|--|--|
| <p>1. Place the base against the wall on the ground and drill holes according to the position.</p> |  An isometric illustration showing a grey rectangular base unit placed against a light grey wall. The base unit has a black rectangular component on its top surface. Two small circular marks on the wall indicate the positions for drilling holes.                                      |
| <p>2. Fix the wall bracket onto the battery.</p>   |  An isometric illustration of a black battery unit. A metal wall bracket is attached to the top-left corner of the battery. The battery has red and green terminals on top.   |
| <p>3. Place two batteries on the base and secure the wall bracket</p>                              |  An isometric illustration showing two black battery units mounted on the grey base unit against the wall. Each battery has a metal wall bracket attached to its top-left corner. The batteries are connected in parallel, with their red and green terminals facing the same direction. |

**7.0 Illustrations**


**Illustration 2f - User manual(partly)**
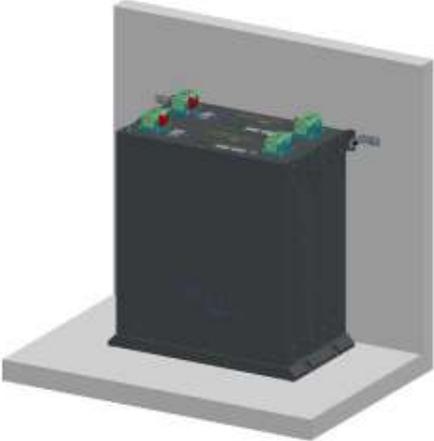
|   |  |
|---|--|
| <p>4. Install the battery mounting bracket.</p>   |  A 3D perspective illustration of a black battery unit mounted on a grey base. A grey mounting bracket is being attached to the top of the battery. The battery has red and green terminals on top. The background is a light grey wall. |
| <p>5. Secure the decorative cover plate lock.</p> |  A 3D perspective illustration of the battery unit with the mounting bracket now fully secured to the wall. The battery is shown from a slightly different angle, highlighting the lock mechanism on the decorative cover plate.        |
| <p>6. The installation is completed.</p>          |  A 3D perspective illustration of the battery unit fully installed and secured to the wall. The battery is shown from a front-three-quarter view, resting on its base.   |


**7.0 Illustrations**

**Illustration 2g - User manual(partly)**

**4.3.2.1 Wall mounted**



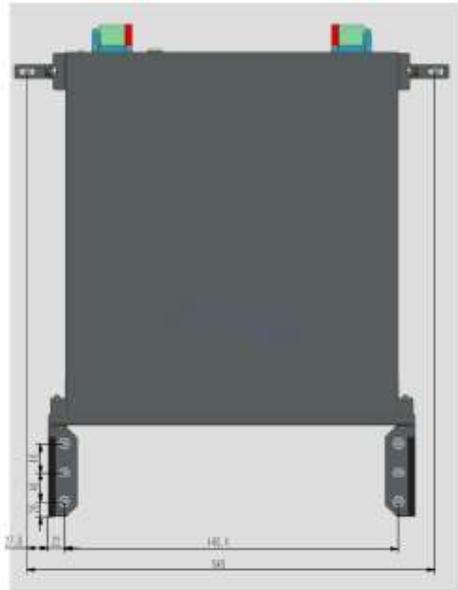


1. Drill holes on the wall according to the dimensions in the picture

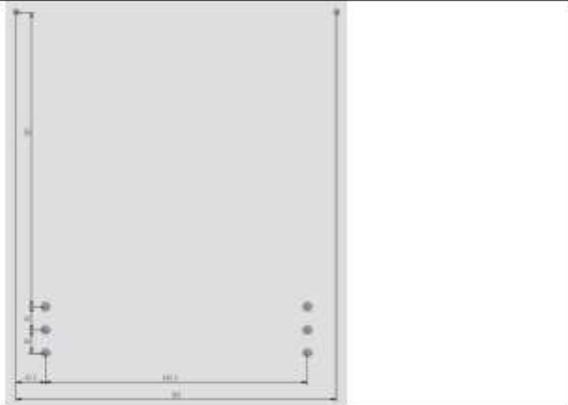


**7.0 Illustrations**

**Illustration 2h - User manual(partly)**
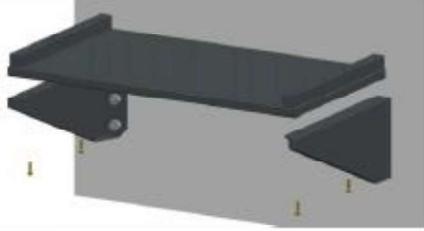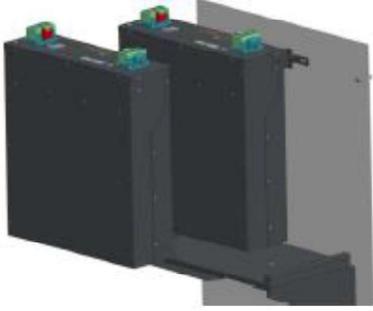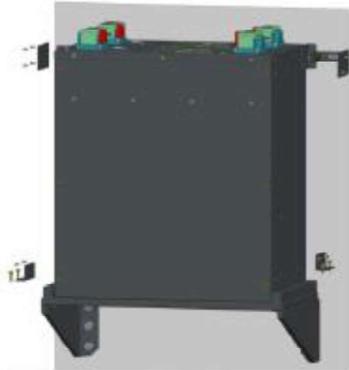
|   |  |
|---|--|
| <p>2. Fix the wall mounting bracket to the wall.</p>                  |    |
| <p>3. Place the battery on the wall mount bracket.</p>                |    |
| <p>4. Fix the side fixing piece between the battery and the wall.</p> |   |
| <p>5. Secure the decorative cover plate lock.</p>                     |  |

**7.0 Illustrations**

**Illustration 2i - User manual(partly)**

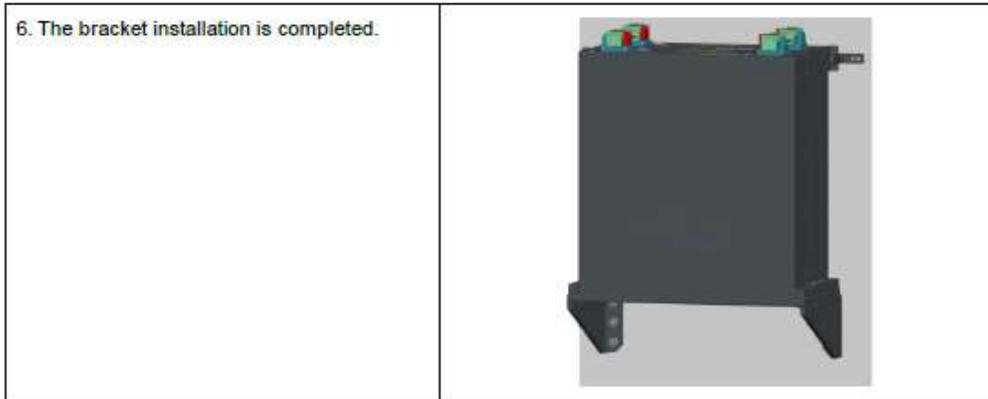

**4.3.3 Tips**

**4.3.3.1 Installation not allowed**

| Direct upside down   | Left side flip   | Right side flip   |
|--|--|---|
|  <p style="text-align: center; color: red; font-weight: bold;">X</p> |  <p style="text-align: center; color: red; font-weight: bold;">X</p> |  <p style="text-align: center; color: red; font-weight: bold;">X</p> |

**4.3.3.2 Other Installation**

| Hang on the wall with Holder   | Placing on the desk  |
|--|--|
|  <p>Please make sure the holder can handle a minimum weight of 50kg</p> |  <p>Please make sure the desk can bear the total weight.</p> |

**⚠ NOTICE**  
 ANY others installations, please avoid the battery directly contacting the ground and avoid of high salinity, humidity to prevent the product from rusting and corrosion.

**7.0 Illustrations**

**Illustration 2j** - User manual(partly)

**7.0 Illustrations**

**Illustration 2k** - User manual(partly)

**7.0 Illustrations**

**Illustration 2I** - User manual(partly)

**7.0 Illustrations**

**Illustration 2m** - User manual(partly)

**7.0 Illustrations**

**Illustration 2n** - User manual(partly)

**7.0 Illustrations**

**Illustration 2o** - User manual(partly)

**7.0 Illustrations**

**Illustration 2p** - User manual(partly)

**7.0 Illustrations**

**Illustration 2q** - User manual(partly)

**7.0 Illustrations**

**Illustration 2r** - User manual(partly)

**7.0 Illustrations**

**Illustration 3 - Ratings**

| Model                                     | 51.2-100V2-XW Pro<br>6.8K1                            | 51.2-100V3-XW Pro<br>6.8K1 | 51.2-100V4-XW Pro<br>6.8K1 | 51.2-100V5-XW Pro<br>6.8K1 |
|---|---|----------------------------|----------------------------|----------------------------|
| <b>Battery data</b>                       |   |                            |                            |                            |
| Battery type                              | LiFePO4   |                            |                            |                            |
| Total capacity                            | 200Ah   | 300Ah                      | 400Ah                      | 500Ah                      |
| Total energy                              | 10.24kWh  | 15.36kWh                   | 20.48kWh                   | 25.6kWh                    |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |                            |                            |                            |
| Nominal voltage                           | 51.2 d.c.V  |                            |                            |                            |
| Max. charge current                       | 140 d.c.A   | 140 d.c.A                  | 140 d.c.A                  | 140 d.c.A                  |
| Max. discharge current                    | 140 d.c.A   | 140 d.c.A                  | 140 d.c.A                  | 140 d.c.A                  |
| Parallel Number                           | 1S2P  | 1S3P                       | 1S4P                       | 1S5P                       |
| <b>AC input/output for grid</b>           |   |                            |                            |                            |
| Nominal voltage                           | 211 - 264 V ac @ 240 Vac<br>105.6 - 132 V ac @ 120 ac |                            |                            |                            |
| Max. input/output current                 | 28.3 Arms @ 240 Vac<br>48 Arms @ 120 Vac              |                            |                            |                            |
| Max. input short circuit current          | 3000 A  |                            |                            |                            |
| Nominal input/output power                | 6000 W @ 240 Vac<br>5760 W @ 120 Vac                  |                            |                            |                            |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |                            |                            |                            |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |                            |                            |                            |
| Max. output over current protection       | 60 A  |                            |                            |                            |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |                            |                            |                            |
| Frequency                                 | 60Hz  |                            |                            |                            |
| <b>AC output for off-grid</b>             |   |                            |                            |                            |
| Nominal voltage                           | 120/240 V ac  |                            |                            |                            |
| Max. continuous current                   | 28 Arms @ 240 Vac<br>48 Arms @ 120 Vac                |                            |                            |                            |
| Max. AC power                             | 6800 W @ 240 Vac<br>5760 W @ 120 Vac                  |                            |                            |                            |
| AC frequency                              | 60Hz  |                            |                            |                            |
| Output power factor rating                | 0 - 1.00  |                            |                            |                            |
| <b>General Data</b>                       |   |                            |                            |                            |
| Charging Temperature Range                | -5°C to 50°C  |                            |                            |                            |
| Discharging Temperature Range             | -20°C to 55°C   |                            |                            |                            |
| Install Location                          | Indoor use  |                            |                            |                            |
| Protection Class                          | IP20  |                            |                            |                            |

**7.0 Illustrations**

**Illustration 3a - Ratings**

| Model                                     | 51.2-100V6-XW Pro<br>6.8K1                            | 51.2-100V7-XW Pro<br>6.8K1 | 51.2-100V8-XW Pro<br>6.8K1 | 51.2-100V9-XW Pro<br>6.8K1 |
|---|---|----------------------------|----------------------------|----------------------------|
| Battery data                              |   |                            |                            |                            |
| Battery type                              | LiFePO4   |                            |                            |                            |
| Total capacity                            | 600Ah   | 700Ah                      | 800Ah                      | 900Ah                      |
| Total energy                              | 30.72kWh  | 35.84kWh                   | 40.96kWh                   | 46.08kWh                   |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |                            |                            |                            |
| Nominal voltage                           | 51.2 d.c.V  |                            |                            |                            |
| Max. charge current                       | 140 d.c.A   | 140 d.c.A                  | 140 d.c.A                  | 140 d.c.A                  |
| Max. discharge current                    | 140 d.c.A   | 140 d.c.A                  | 140 d.c.A                  | 140 d.c.A                  |
| Parallel Number                           | 1S6P  | 1S7P                       | 1S8P                       | 1S9P                       |
| AC input/output for grid                  |   |                            |                            |                            |
| Nominal voltage                           | 211 - 264 V ac @ 240 Vac<br>105.6 - 132 V ac @ 120 ac |                            |                            |                            |
| Max. input/output current                 | 28.3 Arms @ 240 Vac<br>48 Arms @ 120 Vac              |                            |                            |                            |
| Max. input short circuit current          | 3000 A  |                            |                            |                            |
| Nominal input/output power                | 6000 W @ 240 Vac<br>5760 W @ 120 Vac                  |                            |                            |                            |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |                            |                            |                            |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |                            |                            |                            |
| Max. output over current protection       | 60 A  |                            |                            |                            |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |                            |                            |                            |
| Frequency                                 | 60Hz  |                            |                            |                            |
| AC output for off-grid                    |   |                            |                            |                            |
| Nominal voltage                           | 120/240 V ac  |                            |                            |                            |
| Max. continuous current                   | 28 Arms @ 240 Vac<br>48 Arms @ 120 Vac                |                            |                            |                            |
| Max. AC power                             | 6800 W @ 240 Vac<br>5760 W @ 120 Vac                  |                            |                            |                            |
| AC frequency                              | 60Hz  |                            |                            |                            |
| Output power factor                       | 0 - 1.00  |                            |                            |                            |
| General Data                              |   |                            |                            |                            |
| Charging Temperature Range                | -5°C to 50°C  |                            |                            |                            |
| Discharging Temperature Range             | -20°C to 55°C   |                            |                            |                            |
| Install Location                          | Indoor use  |                            |                            |                            |
| Protection Class                          | IP20  |                            |                            |                            |

**7.0 Illustrations**

**Illustration 3b - Ratings**

| Model                                     | 51.2-100V10-XW Pro<br>6.8K1                           | 51.2-100V11-XW Pro<br>6.8K1 | 51.2-100V12-XW Pro<br>6.8K1 | 51.2-100V13-XW<br>Pro 6.8K1 |
|---|---|-----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                             |                             |                             |
| Battery type                              | LiFePO4   |                             |                             |                             |
| Total capacity                            | 1000Ah  | 1100Ah                      | 1200Ah                      | 1300Ah                      |
| Total energy                              | 51.2kWh   | 56.32kWh                    | 61.44kWh                    | 66.56kWh                    |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |                             |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                             |                             |                             |
| Max. charge current                       | 140 d.c.A   | 140 d.c.A                   | 140 d.c.A                   | 140 d.c.A                   |
| Max. discharge current                    | 140 d.c.A   | 140 d.c.A                   | 140 d.c.A                   | 140 d.c.A                   |
| Parallel Number                           | 1S10P   | 1S11P                       | 1S12P                       | 1S13P                       |
| <b>AC input/output for grid</b>           |   |                             |                             |                             |
| Nominal voltage                           | 211 - 264 V ac @ 240 Vac<br>105.6 - 132 V ac @ 120 ac |                             |                             |                             |
| Max.input/output current                  | 28.3 Arms @ 240 Vac<br>48 Arms @ 120 Vac              |                             |                             |                             |
| Max. input short circuit current          | 3000 A  |                             |                             |                             |
| Nominal input/output power                | 6000 W @ 240 Vac<br>5760 W @ 120 Vac                  |                             |                             |                             |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |                             |                             |                             |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |                             |                             |                             |
| Max. output over current protection       | 60 A  |                             |                             |                             |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |                             |                             |                             |
| Frequency                                 | 60Hz  |                             |                             |                             |
| <b>AC output for off-grid</b>             |   |                             |                             |                             |
| Nominal voltage                           | 120/240 V ac  |                             |                             |                             |
| Max. continuous current                   | 28 Arms @ 240 Vac<br>48 Arms @ 120 Vac                |                             |                             |                             |
| Max. AC power                             | 6800 W @ 240 Vac<br>5760 W @ 120 Vac                  |                             |                             |                             |
| AC frequency                              | 60Hz  |                             |                             |                             |
| Output power factor rating                | 0 - 1.00  |                             |                             |                             |
| <b>General Data</b>                       |   |                             |                             |                             |
| Charging Temperature Range                | -5°C to 50°C  |                             |                             |                             |
| Discharging Temperature Range             | -20°C to 55°C   |                             |                             |                             |
| Install Location                          | Indoor use  |                             |                             |                             |
| Protection Class                          | IP20  |                             |                             |                             |

**7.0 Illustrations**

**Illustration 3c - Ratings**

|   |   |
|---|---|
| Model                                     | 51.2-100V14-XW Pro 6.8K1                              |
| <b>Battery data</b>                       |   |
| Battery type                              | LiFePO4   |
| Total capacity                            | 1400Ah  |
| Total energy                              | 71.68kWh  |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |
| Nominal voltage                           | 51.2 d.c.V  |
| Max. charge current                       | 140 d.c.A   |
| Max. discharge current                    | 140 d.c.A   |
| Parallel Number                           | 1S14P   |
| <b>AC input/output for grid</b>           |   |
| Nominal voltage                           | 211 - 264 V ac @ 240 Vac<br>105.6 - 132 V ac @ 120 ac |
| Max. input/output current                 | 28.3 Arms @ 240 Vac<br>48 Arms @ 120 Vac              |
| Max. input short circuit current          | 3000 A  |
| Nominal input/output power                | 6000 W @ 240 Vac<br>5760 W @ 120 Vac                  |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |
| Max. output over current protection       | 60 A  |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |
| Frequency                                 | 60Hz  |
| <b>AC output for off-grid</b>             |   |
| Nominal voltage                           | 120/240 V ac  |
| Max. continuous current                   | 28 Arms @ 240 Vac<br>48 Arms @ 120 Vac                |
| Max. AC power                             | 6800 W @ 240 Vac<br>5760 W @ 120 Vac                  |
| AC frequency                              | 60Hz  |
| Output power factor rating                | 0 - 1.00  |
| <b>General Data</b>                       |   |
| Charging Temperature Range                | -5°C to 50°C  |
| Discharging Temperature Range             | -20°C to 55°C   |
| Install Location                          | Indoor use  |
| Protection Class                          | IP20  |

**7.0 Illustrations**

**Illustration 3d - Ratings**

| Model                                     | 51.2-100V4-XW Pro<br>6.8K2                            | 51.2-100V5-XW Pro<br>6.8K2 | 51.2-100V6-XW Pro<br>6.8K2 | 51.2-100V7-XW Pro<br>6.8K2 |
|---|---|----------------------------|----------------------------|----------------------------|
| <b>Battery data</b>                       |   |                            |                            |                            |
| Battery type                              | LiFePO4   |                            |                            |                            |
| Total capacity                            | 400Ah   | 500Ah                      | 600Ah                      | 700Ah                      |
| Total energy                              | 20.48kWh  | 25.6kWh                    | 30.72kWh                   | 35.84kWh                   |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |                            |                            |                            |
| Nominal voltage                           | 51.2 d.c.V  |                            |                            |                            |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                  | 280 d.c.A                  | 280 d.c.A                  |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                  | 280 d.c.A                  | 280 d.c.A                  |
| Parallel Number                           | 1S4P  | 1S5P                       | 1S6P                       | 1S7P                       |
| <b>AC input/output for grid</b>           |   |                            |                            |                            |
| Nominal voltage                           | 211 - 264 V ac @ 240 Vac<br>105.6 - 132 V ac @ 120 ac |                            |                            |                            |
| Max. input/output current                 | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac              |                            |                            |                            |
| Max. short circuit current                | 3000 A  |                            |                            |                            |
| Nominal input/output power                | 12000 W @ 240 Vac<br>11520 W @ 120 Vac                |                            |                            |                            |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |                            |                            |                            |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |                            |                            |                            |
| Max. output over current protection       | 60 A  |                            |                            |                            |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |                            |                            |                            |
| Frequency                                 | 60Hz  |                            |                            |                            |
| <b>AC output for off-grid</b>             |   |                            |                            |                            |
| Nominal voltage                           | 120/240 V ac  |                            |                            |                            |
| Max. continuous current                   | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac                |                            |                            |                            |
| Max. AC power                             | 13600 W @ 240 Vac<br>11520 W @ 120 Vac                |                            |                            |                            |
| AC frequency                              | 60Hz  |                            |                            |                            |
| Output power factor rating                | 0 - 1.00  |                            |                            |                            |
| <b>General Data</b>                       |   |                            |                            |                            |
| Charging Temperature Range                | -5°C to 50°C  |                            |                            |                            |
| Discharging Temperature Range             | -20°C to 55°C   |                            |                            |                            |
| Install Location                          | Indoor use  |                            |                            |                            |
| Protection Class                          | IP20  |                            |                            |                            |

**7.0 Illustrations**

**Illustration 3e - Ratings**

| Model                                     | 51.2-100V8-XW Pro<br>6.8K2                            | 51.2-100V9-XW Pro<br>6.8K2 | 51.2-100V10-XW Pro<br>6.8K2 | 51.2-100V11-XW<br>Pro 6.8K2 |
|---|---|----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                            |                             |                             |
| Battery type                              | LiFePO4   |                            |                             |                             |
| Total capacity                            | 800Ah   | 900Ah                      | 1000Ah                      | 1100Ah                      |
| Total energy                              | 40.96kWh  | 46.08kWh                   | 51.2kWh                     | 56.32kWh                    |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |                            |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                            |                             |                             |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                  | 280 d.c.A                   | 280 d.c.A                   |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                  | 280 d.c.A                   | 280 d.c.A                   |
| Parallel Number                           | 1S8P  | 1S9P                       | 1S10P                       | 1S11P                       |
| <b>AC input/output for grid</b>           |   |                            |                             |                             |
| Nominal voltage                           | 211 - 264 V ac @ 240 Vac<br>105.6 - 132 V ac @ 120 ac |                            |                             |                             |
| Max. input/output current                 | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac              |                            |                             |                             |
| Max. short circuit current and duration   | 3000 A  |                            |                             |                             |
| Nominal input/output power                | 12000 W @ 240 Vac<br>11520 W @ 120 Vac                |                            |                             |                             |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |                            |                             |                             |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |                            |                             |                             |
| Max. output over current protection       | 60 A  |                            |                             |                             |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |                            |                             |                             |
| Frequency                                 | 60Hz  |                            |                             |                             |
| <b>AC output for off-grid</b>             |   |                            |                             |                             |
| Nominal voltage                           | 120/240 V ac  |                            |                             |                             |
| Max. continuous current                   | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac                |                            |                             |                             |
| Max. AC power                             | 13600 W @ 240 Vac<br>11520 W @ 120 Vac                |                            |                             |                             |
| AC frequency                              | 60Hz  |                            |                             |                             |
| Output power factor rating                | 0 - 1.00  |                            |                             |                             |
| <b>General Data</b>                       |   |                            |                             |                             |
| Charging Temperature Range                | -5°C to 50°C  |                            |                             |                             |
| Discharging Temperature Range             | -20°C to 55°C   |                            |                             |                             |
| Install Location                          | Indoor use  |                            |                             |                             |
| Protection Class                          | IP20  |                            |                             |                             |

**7.0 Illustrations**

**Illustration 3f - Ratings**

| Model                                     | 51.2-100V12-XW Pro<br>6.8K2                           | 51.2-100V13-XW Pro<br>6.8K2 | 51.2-100V14-XW Pro<br>6.8K2 | 51.2-100V15-XW<br>Pro 6.8K2 |
|---|---|-----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                             |                             |                             |
| Battery type                              | LiFePO4   |                             |                             |                             |
| Total capacity                            | 1200Ah  | 1300Ah                      | 1400Ah                      | 1500Ah                      |
| Total energy                              | 61.44kWh  | 66.56kWh                    | 71.68kWh                    | 76.8kWh                     |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |                             |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                             |                             |                             |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Parallel Number                           | 1S12P   | 1S13P                       | 1S14P                       | 1S15P                       |
| <b>AC input/output for grid</b>           |   |                             |                             |                             |
| Nominal voltage                           | 211 - 264 V ac @ 240 Vac<br>105.6 - 132 V ac @ 120 ac |                             |                             |                             |
| Max. input/output current                 | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac              |                             |                             |                             |
| Max. short circuit current and duration   | 3000 A  |                             |                             |                             |
| Nominal input/output power                | 12000 W @ 240 Vac<br>11520 W @ 120 Vac                |                             |                             |                             |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |                             |                             |                             |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |                             |                             |                             |
| Max. output over current protection       | 60 A  |                             |                             |                             |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |                             |                             |                             |
| Frequency                                 | 60Hz  |                             |                             |                             |
| <b>AC output for off-grid</b>             |   |                             |                             |                             |
| Nominal voltage                           | 120/240 V ac  |                             |                             |                             |
| Max. continuous current                   | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac                |                             |                             |                             |
| Max. AC power                             | 13600 W @ 240 Vac<br>11520 W @ 120 Vac                |                             |                             |                             |
| AC frequency                              | 60Hz  |                             |                             |                             |
| Output power factor rating                | 0 - 1.00  |                             |                             |                             |
| <b>General Data</b>                       |   |                             |                             |                             |
| Charging Temperature Range                | -5°C to 50°C  |                             |                             |                             |
| Discharging Temperature Range             | -20°C to 55°C   |                             |                             |                             |
| Install Location                          | Indoor use  |                             |                             |                             |
| Protection Class                          | IP20  |                             |                             |                             |

**7.0 Illustrations**

**Illustration 3g - Ratings**

| Model                                     | 51.2-100V16-XW Pro<br>6.8K2                           | 51.2-100V17-XW Pro<br>6.8K2 | 51.2-100V18-XW Pro<br>6.8K2 | 51.2-100V19-XW<br>Pro 6.8K2 |
|---|---|-----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                             |                             |                             |
| Battery type                              | LiFePO4   |                             |                             |                             |
| Total capacity                            | 1600Ah  | 1700Ah                      | 1800Ah                      | 1900Ah                      |
| Total energy                              | 81.92kWh  | 87.04kWh                    | 92.16kWh                    | 97.28kWh                    |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |                             |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                             |                             |                             |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Parallel Number                           | 1S16P   | 1S17P                       | 1S18P                       | 1S19P                       |
| <b>AC input/output for grid</b>           |   |                             |                             |                             |
| Nominal voltage                           | 211 - 264 V ac @ 240 Vac<br>105.6 - 132 V ac @ 120 ac |                             |                             |                             |
| Max. input/output current                 | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac              |                             |                             |                             |
| Max. short circuit current and duration   | 3000 A  |                             |                             |                             |
| Nominal input/output power                | 12000 W @ 240 Vac<br>11520 W @ 120 Vac                |                             |                             |                             |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |                             |                             |                             |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |                             |                             |                             |
| Max. output over current protection       | 60 A  |                             |                             |                             |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |                             |                             |                             |
| Frequency                                 | 60Hz  |                             |                             |                             |
| <b>AC output for off-grid</b>             |   |                             |                             |                             |
| Nominal voltage                           | 120/240 V ac  |                             |                             |                             |
| Max. continuous current                   | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac                |                             |                             |                             |
| Max. AC power                             | 13600 W @ 240 Vac<br>11520 W @ 120 Vac                |                             |                             |                             |
| AC frequency                              | 60Hz  |                             |                             |                             |
| Output power factor rating                | 0 - 1.00  |                             |                             |                             |
| <b>General Data</b>                       |   |                             |                             |                             |
| Charging Temperature Range                | -5°C to 50°C  |                             |                             |                             |
| Discharging Temperature Range             | -20°C to 55°C   |                             |                             |                             |
| Install Location                          | Indoor use  |                             |                             |                             |
| Protection Class                          | IP20  |                             |                             |                             |

**7.0 Illustrations**

**Illustration 3h - Ratings**

| Model                                     | 51.2-100V20-XW Pro<br>6.8K2                           | 51.2-100V21-XW Pro<br>6.8K2 | 51.2-100V22-XW Pro<br>6.8K2 | 51.2-100V23-XW<br>Pro 6.8K2 |
|---|---|-----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                             |                             |                             |
| Battery type                              | LiFePO4   |                             |                             |                             |
| Total capacity                            | 2000Ah  | 2100Ah                      | 2200Ah                      | 2300Ah                      |
| Total energy                              | 102.4kWh  | 107.52kWh                   | 112.64kWh                   | 117.76kWh                   |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |                             |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                             |                             |                             |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Parallel Number                           | 1S20P   | 1S21P                       | 1S22P                       | 1S23P                       |
| <b>AC input/output for grid</b>           |   |                             |                             |                             |
| Nominal voltage                           | 211 - 264 V ac @ 240 vac<br>105.6 - 132 V ac @ 120 ac |                             |                             |                             |
| Max. input/output current                 | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac              |                             |                             |                             |
| Max. short circuit current and duration   | 3000 A  |                             |                             |                             |
| Nominal input/output power                | 12000 W @ 240 Vac<br>11520 W @ 120 Vac                |                             |                             |                             |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |                             |                             |                             |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |                             |                             |                             |
| Max. output over current protection       | 60 A  |                             |                             |                             |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |                             |                             |                             |
| Frequency                                 | 60Hz  |                             |                             |                             |
| <b>AC output for off-grid</b>             |   |                             |                             |                             |
| Nominal voltage                           | 120/240 V ac  |                             |                             |                             |
| Max. continuous current                   | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac                |                             |                             |                             |
| Max. AC power                             | 13600 W @ 240 Vac<br>11520 W @ 120 Vac                |                             |                             |                             |
| AC frequency                              | 60Hz  |                             |                             |                             |
| Output power factor rating                | 0 - 1.00  |                             |                             |                             |
| <b>General Data</b>                       |   |                             |                             |                             |
| Charging Temperature Range                | -5°C to 50°C  |                             |                             |                             |
| Discharging Temperature Range             | -20°C to 55°C   |                             |                             |                             |
| Install Location                          | Indoor use  |                             |                             |                             |
| Protection Class                          | IP20  |                             |                             |                             |

**7.0 Illustrations**

**Illustration 3i - Ratings**

| Model                                     | 51.2-100V24-XW Pro<br>6.8K2                           | 51.2-100V25-XW Pro<br>6.8K2 | 51.2-100V26-XW Pro<br>6.8K2 | 51.2-100V27-XW<br>Pro 6.8K2 |
|---|---|-----------------------------|-----------------------------|-----------------------------|
| <b>Battery data</b>                       |   |                             |                             |                             |
| Battery type                              | LiFePO4   |                             |                             |                             |
| Total capacity                            | 2400Ah  | 2500Ah                      | 2600Ah                      | 2700Ah                      |
| Total energy                              | 122.88kWh   | 128kWh                      | 133.12kWh                   | 138.24kWh                   |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |                             |                             |                             |
| Nominal voltage                           | 51.2 d.c.V  |                             |                             |                             |
| Max. charge current                       | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Max. discharge current                    | 280 d.c.A   | 280 d.c.A                   | 280 d.c.A                   | 280 d.c.A                   |
| Parallel Number                           | 1S24P   | 1S25P                       | 1S26P                       | 1S27P                       |
| <b>AC input/output for grid</b>           |   |                             |                             |                             |
| Nominal voltage                           | 211 - 264 V ac @ 240 Vac<br>105.6 - 132 V ac @ 120 ac |                             |                             |                             |
| Max. input/output current                 | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac              |                             |                             |                             |
| Max. short circuit current and duration   | 3000 A  |                             |                             |                             |
| Nominal input/output power                | 12000 W @ 240 Vac<br>11520 W @ 120 Vac                |                             |                             |                             |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |                             |                             |                             |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |                             |                             |                             |
| Max. output over current protection       | 60 A  |                             |                             |                             |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |                             |                             |                             |
| Frequency                                 | 60Hz  |                             |                             |                             |
| <b>AC output for off-grid</b>             |   |                             |                             |                             |
| Nominal voltage                           | 120/240 V ac  |                             |                             |                             |
| Max. continuous current                   | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac                |                             |                             |                             |
| Max. AC power                             | 13600 W @ 240 Vac<br>11520 W @ 120 Vac                |                             |                             |                             |
| AC frequency                              | 60Hz  |                             |                             |                             |
| Output power factor rating                | 0 - 1.00  |                             |                             |                             |
| <b>General Data</b>                       |   |                             |                             |                             |
| Charging Temperature Range                | -5°C to 50°C  |                             |                             |                             |
| Discharging Temperature Range             | -20°C to 55°C   |                             |                             |                             |
| Install Location                          | Indoor use  |                             |                             |                             |
| Protection Class                          | IP20  |                             |                             |                             |

**7.0 Illustrations**

**Illustration 3j - Ratings**

|   |   |
|---|---|
| Model                                     | 51.2-100V28-XW Pro 6.8K2                              |
| Battery data                              |   |
| Battery type                              | LiFePO4   |
| Total capacity                            | 2800Ah  |
| Total energy                              | 143.36kWh   |
| Battery voltage range                     | 44.8-57.6 d.c.V                                       |
| Nominal voltage                           | 51.2 d.c.V  |
| Max. charge current                       | 280 d.c.A   |
| Max. discharge current                    | 280 d.c.A   |
| Parallel Number                           | 1S28P   |
| AC input/output for grid                  |   |
| Nominal voltage                           | 211 - 264 V ac @ 240 Vac<br>105.6 - 132 V ac @ 120 ac |
| Max. input/output current                 | 56.6 Arms @ 240 Vac<br>96 Arms @ 120 Vac              |
| Max. short circuit current and duration   | 3000 A  |
| Nominal input/output power                | 12000 W @ 240 Vac<br>11520 W @ 120 Vac                |
| Max. output apparent Power                | 6800 VA @ 240 Vac<br>5760 VA @ 120 Vac                |
| Maximum Output Fault Current and Duration | 425A pk<br>~0.4 milliseconds                          |
| Max. output over current protection       | 60 A  |
| Output power factor rating                | 0.8 Leading to 0.8 Lagging                            |
| Frequency                                 | 60Hz  |
| AC output for off-grid                    |   |
| Nominal voltage                           | 120/240 V ac  |
| Max. continuous current                   | 56 Arms @ 240 Vac<br>96 Arms @ 120 Vac                |
| Max. AC power                             | 13600 W @ 240 Vac<br>11520 W @ 120 Vac                |
| AC frequency                              | 60Hz  |
| Output power factor rating                | 0 - 1.00  |
| General Data                              |   |
| Charging Temperature Range                | -5°C to 50°C  |
| Discharging Temperature Range             | -20°C to 55°C   |
| Install Location                          | Indoor use  |
| Protection Class                          | IP20  |

| <b>8.0 Test Summary</b>   |  |  |   |
|---|--|--|---|
| Evaluation Period   | 29-Feb-2024 to 10-July-2024  |  | Project No. 240229127GZU                      |
| Sample Rec. Date  | 29-Feb-2024  | Condition                              | Prototype                                     |
|   |  |  | Sample ID. S240229127-011~012, S240229127-017 |
| Test Location   | Intertek Testing Services Shenzhen Ltd. Guangzhou Branch<br>Room 101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road,<br>HuangpuDistrict Guangzhou, Guangdong, China |  |   |
| Test Procedure  | Testing Lab  |  |   |
| Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria. |  |  |   |
| The following tests were performed:   |  |  |   |
| Test Description  |  | [ANSI/CAN/UL 9540:2023 Ed.3]<br>Clause |   |
| Normal Operations Test  |  | 30                                     |   |
| Dielectric Voltage Withstand Test   |  | 32                                     |   |
| Impulse Test  |  | 33                                     |   |
| Equipment Grounding and Bonding Test  |  | 34                                     |   |
| Insulation Resistance Test  |  | 35                                     |   |
| Electromagnetic Immunity Tests  |  | 36                                     |   |
| Wall mount fixture/test   |  | 40.1                                   |   |

| <b>8.1 Signatures</b>  |          |              |            |
|--|----------|--------------|------------|
| A representative sample of the product covered by this report has been evaluated and found to comply with the applicable requirements of the standards indicated in Section 1.0. |          |              |            |
| Completed by:  | Qifa Lai | Reviewed by: | Joss Huang |
| Title:   | Engineer | Title:       | Reviewer   |
| Signature:   |          | Signature:   |            |

**9.0 Correlation Page For Multiple Listings**

The following products, which are identical to those identified in this report except for model number and Listee name, are authorized to bear the ETL label under provisions of the Intertek Multiple Listing Program.

|              |   |
|--------------|---|
| BASIC LISTEE | Energie Volthium Inc                                  |
| Address      | 2600 Boulevard Ford #100, Chateauguay, Quebec J6J 4Z2 |
| Country      | Canada  |
| Product      | Energy Storge Systems                                 |

|   |                     |                          |                     |  |  |
|---|---------------------|--------------------------|---------------------|--|--|
| MULTIPLE LISTEE 1   | None                |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| Brand Name  |                     |                          |                     |  |  |
| ASSOCIATED MANUFACTURER   |                     |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| <table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MULTIPLE LISTEE 1 MODELS</td> <td style="width: 50%;">BASIC LISTEE MODELS</td> </tr> <tr> <td> </td> <td> </td> </tr> </table> |                     | MULTIPLE LISTEE 1 MODELS | BASIC LISTEE MODELS |  |  |
| MULTIPLE LISTEE 1 MODELS  | BASIC LISTEE MODELS |                          |                     |  |  |
|   |                     |                          |                     |  |  |

|   |                     |                          |                     |  |  |
|---|---------------------|--------------------------|---------------------|--|--|
| MULTIPLE LISTEE 2   | None                |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| Brand Name  |                     |                          |                     |  |  |
| ASSOCIATED MANUFACTURER   |                     |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| <table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MULTIPLE LISTEE 2 MODELS</td> <td style="width: 50%;">BASIC LISTEE MODELS</td> </tr> <tr> <td> </td> <td> </td> </tr> </table> |                     | MULTIPLE LISTEE 2 MODELS | BASIC LISTEE MODELS |  |  |
| MULTIPLE LISTEE 2 MODELS  | BASIC LISTEE MODELS |                          |                     |  |  |
|   |                     |                          |                     |  |  |

|   |                     |                          |                     |  |  |
|---|---------------------|--------------------------|---------------------|--|--|
| MULTIPLE LISTEE 3   | None                |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| Brand Name  |                     |                          |                     |  |  |
| ASSOCIATED MANUFACTURER   |                     |                          |                     |  |  |
| Address   |                     |                          |                     |  |  |
| Country   |                     |                          |                     |  |  |
| <table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MULTIPLE LISTEE 3 MODELS</td> <td style="width: 50%;">BASIC LISTEE MODELS</td> </tr> <tr> <td> </td> <td> </td> </tr> </table> |                     | MULTIPLE LISTEE 3 MODELS | BASIC LISTEE MODELS |  |  |
| MULTIPLE LISTEE 3 MODELS  | BASIC LISTEE MODELS |                          |                     |  |  |
|   |                     |                          |                     |  |  |

## 10.0 General Information

The Applicant and Manufacturer have agreed to produce, test and label ETL Listed products in accordance with the requirements of this Report. The Manufacturer has also agreed to notify Intertek and to request authorization prior to using alternate parts, components or materials.

### COMPONENTS

Components used shall be those itemized in this Intertek report covering the product, including any amendments and/or revisions.

### LISTING MARK

The ETL Listing mark applied to the products shall either be separable in form, such as labels purchased from Intertek, or on a product nameplate or other media only as specifically authorized by Intertek. Use of the mark is subject to the control of Intertek.

The mark must include the following four items:

- 1) applicable country identifiers "US" and/or "C" or "US", "C" and "EU"
- 2) the word "Listed" or "Classified" or "Recognized Component" (whichever is appropriate)
- 3) a control number issued by Intertek
- 4) a product descriptor that identifies the standards used for certification. Example:

**For US standards**, the words, "Conforms to" shall appear with the standard number along with the word, "Standard" or "Std." Example: "Conforms to ANSI/UL Std. XX."

**For Canadian standards**, the words "Certified to CAN/CSA Standard CXX No. XX." shall be used, or abbreviated, "Cert. to CAN/CSA Std. CXX No. XX."

Can be used together when both standards are used.

**If all standards on the ATM have the same standard title**, the shared title or its abbreviation may be used in place of the examples above. Example: "Medical Electrical Equipment" or "MEE"; "Information Technology Equipment" or "ITE"; "Audio/Video Information And Communication Technology Equipment" or "AV ICTE".

**Note: A facsimile must be submitted to Intertek, Attn: Follow-up Services for approval prior to use.**

The facsimile need not have a control number. A control number will be issued **after signed Certification Agreements** have been received by the Follow-up Services office, approval of the facsimile of your proposed Listing Mark, satisfactory completion of the Listing Report, and scheduling of a factory assessment in your facility.

### MANUFACTURING AND PRODUCTION TESTS

Manufacturing and Production Tests shall be performed as required in this Report.

### FOLLOW-UP SERVICE

Periodic unannounced audits of the manufacturing facility (and any locations authorized to apply the mark) shall be scheduled by Intertek. An audit report shall be issued after each visit. Special attention will be given to the following:

1. Conformance of the manufactured product to the descriptions in this Report.
2. Conformance of the use of the ETL mark with the requirements of this Report and the Certification Agreement.
3. Manufacturing changes.
4. Performance of specified Manufacturing and Production Tests.

In the event that the Intertek representative identifies non-conformance(s) to any provision of this Report, the Applicant shall take one or more of the following actions:

1. Correct the non-conformance.
2. Remove the ETL Mark from non-conforming product.
3. Contact the issuing product safety evaluation center for instructions.

### **10.1 Evaluation of Unlisted Components**

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

**The Applicant will be notified, in writing, via the applicable contact methods, as defined in Section 1.0, when these components must be selected and sent to Component Evaluation Center (CEC) for re-evaluation.**

**Due to particular testing requirements, some components may be requested to be shipped to specific labs. Thus, specific shipment destination(s) for each sample will be provided in the written notification.**

Managing CEC Location:

Intertek Testing Services Shenzhen Limited Guangzhou Branch

ETL Component Evaluation Center

Room 101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu  
Guangzhou, Guangdong, China

Attn: Ms. Joey Kuang

Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

**11.0 Manufacturing and Production Tests**

The manufacturer agrees to conduct the following Manufacturing and Production Tests as specified:

**Required Tests**

None



This authorizes the application of the Certification Mark(s) shown below to the models described in the Product(s) Covered section when made in accordance with the conditions set forth in the Certification Agreement and Listing Report. This authorization also applies to multiple listee model(s) identified on the correlation page of the Listing Report.

This document is the property of Intertek Testing Services and is not transferable. The certification mark(s) may be applied only at the location of the Party Authorized To Apply Mark.

**Applicant:** Energie Volthium Inc


**Address:** 2600 Boulevard Ford #100,  
Chateauguay, Quebec J6J 4Z2

**Country:** Canada

**Party Authorized To Apply Mark:** Same as Manufacturer

**Report Issuing Office:** Intertek Testing Services Shenzhen Limited Guangzhou Branch

**Control Number:** 5029806

**Authorized by:**   
for L. Matthew Snyder, Certification Manager



This document supersedes all previous Authorizations to Mark for the noted Report Number.

This Authorization to Mark is for the exclusive use of Intertek's Client and is provided pursuant to the Certification agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Authorization to Mark. Only the Client is authorized to permit copying or distribution of this Authorization to Mark and then only in its entirety. Use of Intertek's Certification mark is restricted to the conditions laid out in the agreement and in this Authorization to Mark. Any further use of the Intertek name for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. Initial Factory Assessments and Follow up Services are for the purpose of assuring appropriate usage of the Certification mark in accordance with the agreement, they are not for the purposes of production quality control and do not relieve the Client of their obligations in this respect.

Intertek Testing Services NA Inc.  
545 East Algonquin Road, Arlington Heights, IL 60005  
Telephone 800-345-3851 or 847-439-5667 Fax 312-283-1672

|                     |   |
|---------------------|---|
| <b>Standard(s):</b> | Energy Storage Systems and Equipment [ANSI/CAN/UL 9540:2023 Ed.3] |
| <b>Product:</b>     | Energy Storge Systems   |
| <b>Brand Name:</b>  | Volthium  |

**Models:**


51.2-100V2-LUX 12K1, 51.2-100V3-LUX 12K1, 51.2-100V4-LUX 12K1,  
51.2-100V5-LUX 12K1, 51.2-100V6-LUX 12K1, 51.2-100V7-LUX 12K1,  
51.2-100V8-LUX 12K1, 51.2-100V9-LUX 12K1, 51.2-100V10-LUX 12K1,  
51.2-100V11-LUX 12K1, 51.2-100V12-LUX 12K1, 51.2-100V13-LUX 12K1,  
51.2-100V14-LUX 12K1, 51.2-100V4-LUX 12K2, 51.2-100V5-LUX 12K2,  
51.2-100V6-LUX 12K2, 51.2-100V7-LUX 12K2, 51.2-100V8-LUX 12K2,  
51.2-100V9-LUX 12K2, 51.2-100V10-LUX 12K2, 51.2-100V11-LUX 12K2,  
51.2-100V12-LUX 12K2, 51.2-100V13-LUX 12K2, 51.2-100V14-LUX 12K2,  
51.2-100V15-LUX 12K2, 51.2-100V16-LUX 12K2, 51.2-100V17-LUX 12K2,  
51.2-100V18-LUX 12K2, 51.2-100V19-LUX 12K2, 51.2-100V20-LUX 12K2,  
51.2-100V21-LUX 12K2, 51.2-100V22-LUX 12K2, 51.2-100V23-LUX 12K2,  
51.2-100V24-LUX 12K2, 51.2-100V25-LUX 12K2, 51.2-100V26-LUX 12K2,  
51.2-100V27-LUX 12K2, 51.2-100V28-LUX 12K2, 51.2-100V2-LUX 11.4K1,  
51.2-100V3-LUX 11.4K1, 51.2-100V4-LUX 11.4K1, 51.2-100V5-LUX 11.4K1,  
51.2-100V6-LUX 11.4K1, 51.2-100V7-LUX 11.4K1, 51.2-100V8-LUX 11.4K1,  
51.2-100V9-LUX 11.4K1, 51.2-100V10-LUX 11.4K1, 51.2-100V11-LUX 11.4K1,  
51.2-100V12-LUX 11.4K1, 51.2-100V13-LUX 11.4K1, 51.2-100V14-LUX 11.4K1,  
51.2-100V4-LUX 11.4K2, 51.2-100V5-LUX 11.4K2, 51.2-100V6-LUX 11.4K2,  
51.2-100V7-LUX 11.4K2, 51.2-100V8-LUX 11.4K2, 51.2-100V9-LUX 11.4K2,  
51.2-100V10-LUX 11.4K2, 51.2-100V11-LUX 11.4K2, 51.2-100V12-LUX 11.4K2,  
51.2-100V13-LUX 11.4K2, 51.2-100V14-LUX 11.4K2, 51.2-100V15-LUX 11.4K2,  
51.2-100V16-LUX 11.4K2, 51.2-100V17-LUX 11.4K2, 51.2-100V18-LUX 11.4K2,  
51.2-100V19-LUX 11.4K2, 51.2-100V20-LUX 11.4K2, 51.2-100V21-LUX 11.4K2,  
51.2-100V22-LUX 11.4K2, 51.2-100V23-LUX 11.4K2, 51.2-100V24-LUX 11.4K2,  
51.2-100V25-LUX 11.4K2, 51.2-100V26-LUX 11.4K2, 51.2-100V27-LUX 11.4K2,  
51.2-100V28-LUX 11.4K2

| 1.0 Reference and Address |  |                              |               |
|---------------------------|--|------------------------------|---------------|
| Report Number             | 240229127GZU-001   | Original Issued: 18-Jun-2024 | Revised: None |
| Standard(s)               | Energy Storage Systems and Equipment [ANSI/CAN/UL 9540:2023 Ed.3]        |                              |               |
| Applicant                 | Energie Volthium Inc   | Manufacturer                 |               |
| Address                   | 2600 Boulevard Ford #100,<br>Chateauguay, Quebec J6J 4Z2                 | Address                      |               |
| Country                   | Canada   | Country                      |               |
| Contact                   | Yanni Samson   | Contact                      |               |
| Phone                     | 514-989-9586   | Phone                        | --            |
| FAX                       | --   | FAX                          |               |
| Email                     | <a href="mailto:yanni.samson@volthium.com">yanni.samson@volthium.com</a> | Email                        |               |

| 2.0 Product Description |  |
|-------------------------|--|
| Product                 | Energy Storage Systems   |
| Brand name              |   |
| Description             | The product covered by this report are intelligent energy storage systems. It includes an grid support hybrid inverter and a lithium iron battery system (LiFePO4). Installation should be located where specified in installation manual as well as in accordance with the National Electrical Code (NEC) and the Canadian Electrical Code (CEC).   |
| Models                  | 51.2-100V2-LUX 12K1, 51.2-100V3-LUX 12K1, 51.2-100V4-LUX 12K1, 51.2-100V5-LUX 12K1, 51.2-100V6-LUX 12K1, 51.2-100V7-LUX 12K1, 51.2-100V8-LUX 12K1, 51.2-100V9-LUX 12K1, 51.2-100V10-LUX 12K1, 51.2-100V11-LUX 12K1, 51.2-100V12-LUX 12K1, 51.2-100V13-LUX 12K1, 51.2-100V14-LUX 12K1, 51.2-100V4-LUX 12K2, 51.2-100V5-LUX 12K2, 51.2-100V6-LUX 12K2, 51.2-100V7-LUX 12K2, 51.2-100V8-LUX 12K2, 51.2-100V9-LUX 12K2, 51.2-100V10-LUX 12K2, 51.2-100V11-LUX 12K2, 51.2-100V12-LUX 12K2, 51.2-100V13-LUX 12K2, 51.2-100V14-LUX 12K2, 51.2-100V15-LUX 12K2, 51.2-100V16-LUX 12K2, 51.2-100V17-LUX 12K2, 51.2-100V18-LUX 12K2, 51.2-100V19-LUX 12K2, 51.2-100V20-LUX 12K2, 51.2-100V21-LUX 12K2, 51.2-100V22-LUX 12K2, 51.2-100V23-LUX 12K2, 51.2-100V24-LUX 12K2, 51.2-100V25-LUX 12K2, 51.2-100V26-LUX 12K2, 51.2-100V27-LUX 12K2, 51.2-100V28-LUX 12K2, 51.2-100V2-LUX 11.4K1, 51.2-100V3-LUX 11.4K1, 51.2-100V4-LUX 11.4K1, 51.2-100V5-LUX 11.4K1, 51.2-100V6-LUX 11.4K1, 51.2-100V7-LUX 11.4K1, 51.2-100V8-LUX 11.4K1, 51.2-100V9-LUX 11.4K1, 51.2-100V10-LUX 11.4K1, 51.2-100V11-LUX 11.4K1, 51.2-100V12-LUX 11.4K1, 51.2-100V13-LUX 11.4K1, 51.2-100V14-LUX 11.4K1, 51.2-100V4-LUX 11.4K2, 51.2-100V5-LUX 11.4K2, 51.2-100V6-LUX 11.4K2, 51.2-100V7-LUX 11.4K2, 51.2-100V8-LUX 11.4K2, 51.2-100V9-LUX 11.4K2, 51.2-100V10-LUX 11.4K2, 51.2-100V11-LUX 11.4K2, 51.2-100V12-LUX 11.4K2, 51.2-100V13-LUX 11.4K2, 51.2-100V14-LUX 11.4K2, 51.2-100V15-LUX 11.4K2, 51.2-100V16-LUX 11.4K2, 51.2-100V17-LUX 11.4K2, 51.2-100V18-LUX 11.4K2, 51.2-100V19-LUX 11.4K2, 51.2-100V20-LUX 11.4K2, 51.2-100V21-LUX 11.4K2, 51.2-100V22-LUX 11.4K2, 51.2-100V23-LUX 11.4K2, 51.2-100V24-LUX 11.4K2, 51.2-100V25-LUX 11.4K2, 51.2-100V26-LUX 11.4K2, 51.2-100V27-LUX 11.4K2, 51.2-100V28-LUX 11.4K2 |
| Model Similarity        | All models are identical only except the incorporating grid support hybrid inverter and the number of battery moduels.<br>About series model 51.2-100Vx-LUX xKx<br>The suffix "51.2-100" denotes the battery module.<br>The suffix "Vx" denotes the number of battery moduels (2 to 28).<br>The suffix "LUX xK" denotes the maximum output power of PCS, it can be 12K, 11.4K. 12K represents output power is 12kW. 11.4K represents output power is 11.4kW.<br>The last suffix "x" denotes the number of inverter (1 to 2).<br>The battery module model 51.2-100-R-H-3U-C is identical to 51.2-100-R-3U-C, except that the internal heating sheets can be controlled by software.<br>The wall mounted energy storge system only for model that system energy less than or equal to 20kWh.   |
| Ratings                 | Please refer to section 7.0, Illustration 3, 3a to 3u for details.   |
| Other Ratings           | Please refer to section 7.0, Illustration 3, 3a to 3u for details.   |

**3.0 Product Photographs**

**Photo 1 - Overall view of the battery system**

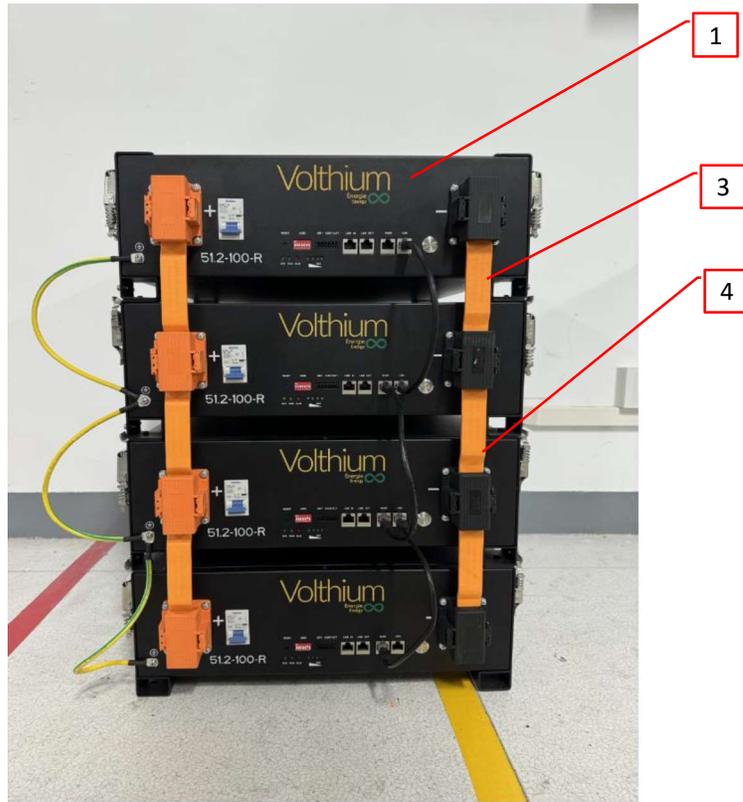

**Photo 2 - Overall view of the inverter**



| 4.0 Critical Components |                       |                             |                                      |                           |  |                                    |
|-------------------------|-----------------------|-----------------------------|--------------------------------------|---------------------------|--|------------------------------------|
| Photo #                 | Item no. <sup>1</sup> | Name                        | Manufacturer/ trademark <sup>2</sup> | Type / model <sup>2</sup> | Technical data and securement means  | Mark(s) of conformity <sup>3</sup> |
| 1                       | 1                     | Lithium iron battery system | Energie Volthium Inc                 | 51.2-100-R-3U-C           | May be used with 2 to 28 battery modules for a system<br>Type of battery: LiFePO4<br>Normal Voltage: 51.2Vdc<br>Max. continue charging current: 70A<br>Max. continue discharging current: 100A<br>Rated capacity: 100Ah<br>Rated energy: 5.12kWh   | cETLus                             |
|                         |                       |                             |                                      | 51.2-100-R-H-3U-C         | May be used with 2 to 28 battery modules for a system<br>Type of battery: LiFePO4<br>Normal Voltage: 51.2Vdc<br>Max. continue charging current: 70A<br>Max. continue discharging current: 100A<br>Rated capacity: 100Ah<br>Rated energy: 5.12kWh   | cETLus                             |
| 2                       | 2                     | Inverter                    | Shenzhen Sea Star Industry Co., Ltd  | LXP-LB-US 12K             | PV input: 120-500d.c.V (Max.600d.c.V), 25/15/15d.c.A (Max.31/19/19d.c.A)<br>Battery side: 48-60d.c.V, chargedand discharge current 250d.c.A<br>Grid side: 208/240a.c.V, 50a.c.A,max.12000VA(240a.c.A), max.10400VA(208a.c.A), 60Hz<br>off-grid side: 208Vac, 120/240Vac split phase, 50a.c.A, max.12000VA(240a.c.A), max.10400VA(208a.c.A), 60Hz<br>Enclosure type: NEMA 4X  | cETLus                             |
|                         |                       |                             |                                      | LXP-LB-US 11.4K           | PV input: 120-500d.c.V (Max.600d.c.V), 25/15/15d.c.A (Max.31/19/19d.c.A)<br>Battery side: 48-60d.c.V, chargedand discharge current 238d.c.A<br>Grid side: 208/240a.c.V, 47.5a.c.A, max.11400VA(240a.c.A), max.9880VA(208a.c.A), 60Hz<br>off-grid side: 208Vac, 120/240Vac split phase, 50a.c.A, max.11400VA(240a.c.A), max.9880VA(208a.c.A), 60Hz<br>Enclosure type: NEMA 4X | cETLus                             |

| 4.0 Critical Components |                       |  |  |                           |                                     |                                    |
|-------------------------|-----------------------|--|--|---------------------------|-------------------------------------|------------------------------------|
| Photo #                 | Item no. <sup>1</sup> | Name   | Manufacturer/ trademark <sup>2</sup>             | Type / model <sup>2</sup> | Technical data and securement means | Mark(s) of conformity <sup>3</sup> |
| 1                       | 3                     | Copper bar   | Dongguan Zhongzhi Electronics Technology Co.,Ltd | 528*25*4                  | COOPER, 528*25*4, pressed nickel    | NR                                 |
|                         |                       |  | Various  | Various                   | COOPER, 528*25*4, pressed nickel    | NR                                 |
|                         |                       |  | Dongguan Zhongzhi Electronics Technology Co.,Ltd | 200*25*4                  | COOPER, 200*25*4, pressed nickel    | NR                                 |
|                         |                       |  | Various  | Various                   | COOPER, 200*25*4, pressed nickel    | NR                                 |
| 1                       | 4                     | Tube   | PENGYUAN ELECTRONICS MATERIAL CO LTD             | RDHF                      | 600V, 125°C, thickness: 1-2mm       | cURus                              |
|                         |                       |  | Various  | Various                   | 600V, 125°C, thickness: 1-2mm       | cURus                              |
| 1                       | 5                     | Interconnecting cord per a battery port between inverter and battery (not shown) | SHENZHEN MYSUN INSULATION MATERIALS CO LTD       | 3512                      | 600V, 200°C, 2/0 AWG                | cURus                              |
|                         |                       |  | Various  | Various                   | 600V, 200°C, 2/0 AWG                | cURus                              |
| 1                       | 6                     | Label (not shown)  | Various  | Various                   | Adhesive-Type, Min. 80°C            | UR                                 |

NOTES:

- 1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.
- 2) "Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.
- 3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates Unlisted and only visual examination is necessary. "See 5.0" indicates Unlisted components or assemblies to be evaluated periodically refer to section 5.0 for details.

**5.0 Critical Unlisted CEC Components**

No Unlisted CEC components are used in this report.

**6.0 Critical Features**

Recognized Component - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

Listed Component - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

Unlisted Component - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

Critical Features/Components - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the product standard.

Construction Details - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.

1. Mechanical Assembly - Components such as switches, fuseholders, connectors, wiring terminals and display lamps are mounted and prevented from shifting or rotating by the use of lockwashers, starwashers, or other mounting format that prevents turning of the component.
2. Corrosion Protection - All ferrous metal parts are protected against corrosion by painting, plating or the equivalent.
3. Accessibility of Live Parts - All uninsulated live parts in primary circuitry are housed within a metal and non-metallic enclosure constructed with no openings other than those specifically described in Sections 4 and 5.
4. Grounding - All exposed dead-metal parts and all dead-metal parts within the enclosure that are exposed are connected to the grounding lead of the power supply cord or the equipment grounding terminal.
5. Polarized Connection - This product is provided with a polarized power supply connection. All single pole switches and fuses are connected only to the ungrounded supply circuit conductor.
6. Internal Wiring - Internal wiring is routed away from sharp or moving parts. Internal wiring leads terminating in soldered connections are made mechanically secure prior to soldering. Recognized Component separable (quick disconnect) connectors of the positive detent type, closed loop connectors, or other types specifically described in the text of this report are also acceptable as internal wiring terminals. At points where internal wiring passes through metal walls or partitions, the wiring insulation is protected against abrasion or damage by plastic bushings or grommets.
7. Markings - The product is marked as follows: Applicant's brand name, model number, date of manufacturer; electrical ratings.
8. Cautionary Markings - refer to Illustration 1 for details.
9. Installation, Operating and Safety Instructions - Instructions for installation and use of this product are provided by the manufacturer. Refer to Illustrations 2, 2a to 2r for details.

## 7.0 Illustrations

### Illustration 1 - Caution and warning labels



## WARNING / AVERTISSEMENT / ADVERTENCIA

Electric shock hazard.

Do not disassemble.

Do not hit or crush.

Do not connect in reverse

or short circuit.

Do not expose to excessive heat.

To Reduce the Risk of Injury,  
read all instructions.

Risque d'électrocution.

chaleur excessive.

Ne pas démonter.

Ne pas heurter ni écraser.

Ne branchez pas en marche

arrière ou en court-circuit.

Ne pas exposer à une chaleur excessive.

Pour prévenir les blessures,  
lire toutes les instructions.

Riesgo de shock eléctrico.

No desarmar.

No golpee ni aplaste.

No se conecte en reversa o cortocircuito.

No exponga al calor excesivo.

Para reducir el riesgo de contraer Injury,

lea todas las instrucciones.

## 7.0 Illustrations

### Illustration 2 - User manual(partly)

## 2. Safety

### 2.1 Safety precautions

|  <b>DANGER</b>   |
|---|
| <b>Explosion risk</b> <ul style="list-style-type: none"><li>• Do not impact the battery with heavy objects.</li><li>• Do not squeeze or pierce the battery pack.</li><li>• Do not throw the battery pack into the fire.</li></ul> |

|  <b>WARNING</b>  |
|---|
| <b>Fire risk</b> <ul style="list-style-type: none"><li>• Do not expose the battery pack to the condition over 80°C.</li><li>• Do not put the battery near a heat source, such as a fireplace.</li><li>• Do not expose the battery pack to direct sunlight or raining.</li></ul> |

|  <b>CAUTION</b>  |
|---|
| <b>Electric shock risk</b> <ul style="list-style-type: none"><li>• Do not allow non-qualified person to disassemble the battery pack.</li><li>• Do not touch the battery pack with wet hands.</li><li>• Do not expose the battery pack to moisture or liquid environment.</li></ul> |

|  <b>NOTICE</b>  |
|--|
| <b>Damage risk</b> <ul style="list-style-type: none"><li>• Do not short-circuit or reverse connect the battery.</li><li>• Do not use chargers or charging devices unapproved by the manufacturer to charge the battery.</li><li>• Do not mix batteries from different manufacturers or different kinds, types or brands.</li></ul> |

### 2.2 Safety instructions

The battery has been designed and tested in accordance with international (such as UL, IEC, UN38.3 etc.)

## 7.0 Illustrations

### Illustration 2a - User manual(partly)

safety requirements. However, due to various factors during the whole lifetime process, Volthium cannot guarantee absolute safety, in order to prevent personal injury and property damage and ensure long-term operation of the battery, please do read the below section carefully to operate the battery and handle emergency situations.

#### 2.2.1 Safety gear

It is required to wear the following safety gear when installing and handling the battery pack.



Insulated gloves



Safety Glasses



Safety Shoes

#### 2.2.2 Emergency safety measures

##### Water invasion

Please cut off the AC power supply of the system first and then disconnect all switched under the premise of ensuring safety.

##### Electrolyte or gas leakage

If the battery pack leaks electrolyte, avoid contact with the leaking liquid or gas. If one is exposed to the leaked substance, immediately perform the actions described below.

- **Gas Inhalation:** Evacuate the people in the contaminated area and seek medical aid immediately.
- **Eye Contact:** Flush your eye with clean and flowing water for 15 min, and seek medical aid immediately.
- **Skin Contact:** Thoroughly rinse the exposed area with soap and water to be sure no chemical or soap is left on them, and seek medical aid immediately.
- **Ingestion:** Induce vomiting, and seek medical help immediately.

### WARNING

In case of fire situations, please use carbon dioxide fire extinguisher rather than liquid to put out fires.

#### 2.2.3 Other Tips

- All the product are strictly inspected before shipment, please contact your supplier for replacement if you notice there's any defectives such as swelling.
- Do not disassemble batteries and components, otherwise the manufacturer will not be responsible for any damage caused by unauthorized disassembly or repair.
- Do enable the battery to be safely grounded before use to make sure the system in safe and normal operation.
- Please ensure that the electric parameters of these devices are compatible mutually before connecting the battery to other devices.
- Please take the environmental factors into careful considerations to ensure that the system can work in a suitable condition as the environment and storage methods have a certain impact on the service life and reliability of this product.

## 7.0 Illustrations

### Illustration 2b - User manual(partly)

#### 4.3 Start Installation

##### Qualified person

##### 4.3.1 Remainder

Please check again the following conditions or equipment whether meet the requirements before installation:

- Check if there's enough space for installation, and if the load-bearing capacity of the bracket or cabinet meets the weight requirements.
- Check whether the power cable pair(s) used meets the maximum current requirement for operation.
- Check whether the overall layout of power supply equipment and batteries at the construction site is reasonable.
- Check whether the installer is wearing anti-static wristband.
- Check whether there're two people on the construction site for installation work.
- Check if there's potential risks at location of installation site, e.g flooding, sun exposure, corrosion, and salt spray.

##### 4.3.2 Procedures

###### CAUTION

Injuries may result if the product is lifted incorrectly or dropped while being transported or mounted.  
Wear suitable personal protective equipment for all work on the product.

###### CAUTION

Ensure that no lines are laid in the wall which could be damaged when drilling holes.

##### 4.3.2.1 Rack mounted

**7.0 Illustrations**

**Illustration 2c - User manual(partly)**


|  |
|--|
| 1. Take the battery pack out from carton.  |
| 2. Get the Rack or cabinet ready and place it horizontally at a reasonable location.   |
| 3. Place the battery on the rack or cabinet tray via manual-lift, Insert the screws and fasten the battery to the rack or cabinet. |
| 4. Finish the cable connection   |

**4.3.2.2 Stack mounted**

|  |  |
|--|--|
| 1. Take the battery pack out from carton.  |  |
| 2. Remove the mounting ear from both side of the battery.  |    |
| 3. Install the stacking component at four corners of the battery.  |   |
| 4. Remove the hook on the stacking component of the bottom battery of each stack.                                      |  |
| 5. Put another battery on top of the previous module, and align the locating holes and connect the 4 lockers together. |  |



**7.0 Illustrations**

**Illustration 2d - User manual(partly)**

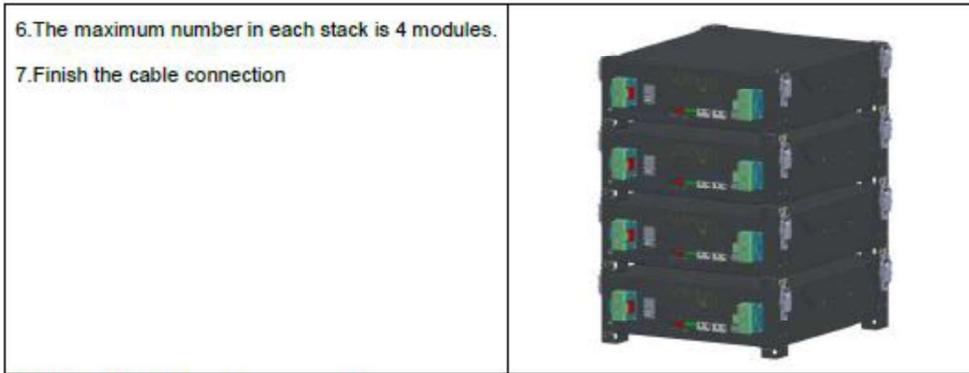


Note: Do not stack the batteries directly.

**4.3.2.1 Floor mounted**

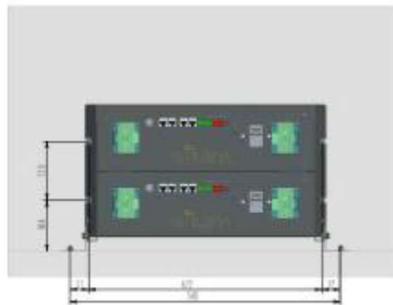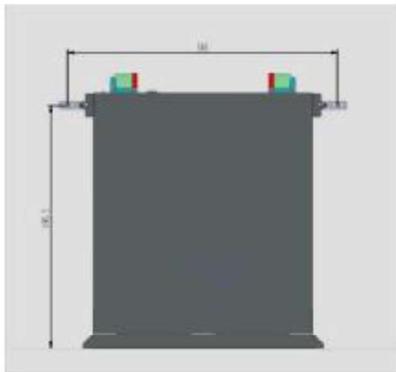


**7.0 Illustrations**

**Illustration 2e - User manual(partly)**
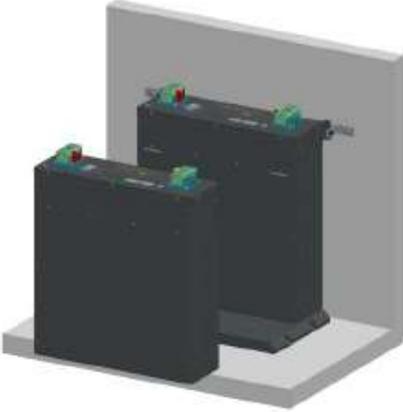
|  |  |
|--|--|
| <p>1. Place the base against the wall on the ground and drill holes according to the position.</p> |    |
| <p>2. Fix the wall bracket onto the battery.</p>   |   |
| <p>3. Place two batteries on the base and secure the wall bracket</p>                              |  |

**7.0 Illustrations**


**Illustration 2f - User manual(partly)**
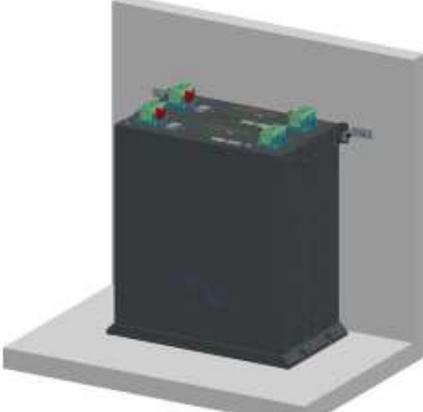
|   |  |
|---|--|
| <p>4. Install the battery mounting bracket.</p>   |    |
| <p>5. Secure the decorative cover plate lock.</p> |   |
| <p>6. The installation is completed.</p>          |  |


**7.0 Illustrations**

**Illustration 2g - User manual(partly)**

**4.3.2.1 Wall mounted**


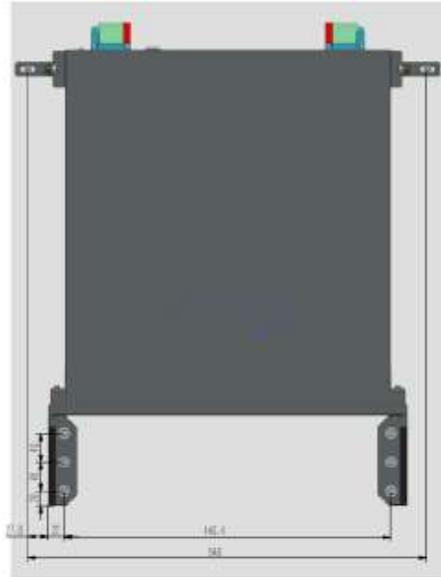


1. Drill holes on the wall according to the dimensions in the picture

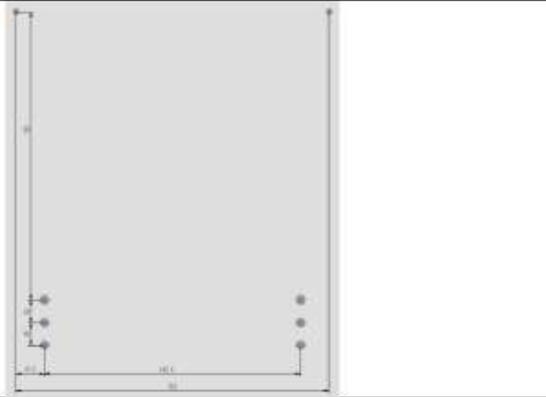


**7.0 Illustrations**

**Illustration 2h - User manual(partly)**
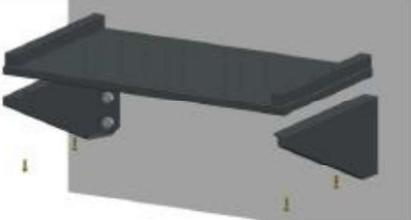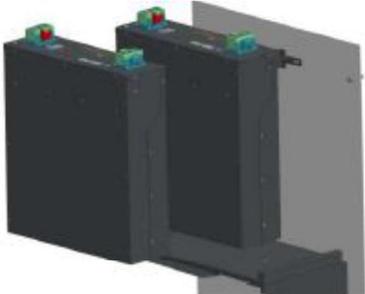
|   |  |
|---|--|
| <p>2. Fix the wall mounting bracket to the wall.</p>                  |    |
| <p>3. Place the battery on the wall mount bracket.</p>                |    |
| <p>4. Fix the side fixing piece between the battery and the wall.</p> |   |
| <p>5. Secure the decorative cover plate lock.</p>                     |  |

**7.0 Illustrations**

**Illustration 2i - User manual(partly)**

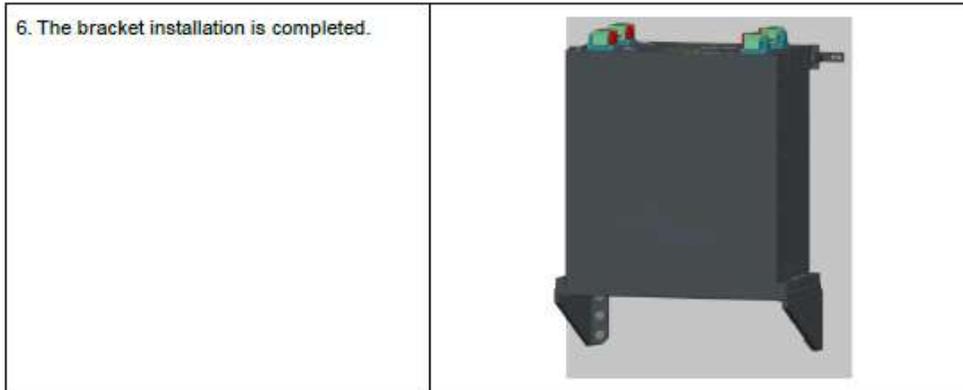

**4.3.3 Tips**

**4.3.3.1 Installation not allowed**

| Direct upside down   | Left side flip   | Right side flip   |
|--|--|---|
|  <p style="text-align: center; color: red; font-weight: bold;">X</p> |  <p style="text-align: center; color: red; font-weight: bold;">X</p> |  <p style="text-align: center; color: red; font-weight: bold;">X</p> |

**4.3.3.2 Other Installation**

| Hang on the wall with Holder | Placing on the desk |
|------------------------------|---------------------|
|------------------------------|---------------------|

|  |  |
|--|--|
|  <p>Please make sure the holder can handle a minimum weight of 50kg</p> |  <p>Please make sure the desk can bear the total weight.</p> |
|--|--|

**▲ NOTICE**  
 ANY others installations, please avoid the battery directly contacting the ground and avoid of high salinity, humidity to prevent the product from rusting and corrosion.

## 7.0 Illustrations

### Illustration 2j - User manual(partly)

## 6. LUX installation

### 6.1 Safety precautions

#### General Safety Instructions

International safety regulations have been strictly observed in the design and testing of the inverter. Prior to any work, carefully read all safety instructions and observe them at all times when working on or with the inverter. The installation must adhere to all applicable national or international standards or regulations.

Incorrect operation or work may cause:

- Injury or death to the operator or a third party
- damage to the inverter and other properties belonging to the operator or a third party.

#### Important Safety Notifications

There are various safety issues that must be carefully conveyed prior to during and after the installation, as well as during future operation and maintenance. The following are important safety notifications for the operator, owner, and user of this product under normal conditions of use.

#### **⚠ DANGER** Dangers of High Voltages and Large Current

- Beware of high PV voltage. Please turn-off the DC switch of PV Panel output before and during the installation to avoid electric shock.
- Beware of high grid voltage. Please turn-off the AC switch at the grid connection before and during the installation to avoid electric shock.
- Beware of large current of the battery output. Please turn-off the battery module before and during the installation to avoid electric shock.
- Do not open the inverter when it's working to avoid electric shock and damage from live voltage and current from the system.
- Do not operate the inverter when it's working, only the LCD and buttons can be touched in limited cases by qualified personnel. Other parts of the inverter can be touched when the inverter is in a safe state (e.g. fully shut-down).
- Do not connect or disconnect any connections (PV, battery, grid, communication etc.) of the inverter when it's working.
- Make sure the inverter is well grounded, An operator should make sure he is well protected by reasonable and professional insulation measurements (e.g. personal protective equipment (PPE)).
- Inspect relevant existing wiring on-site of the installation is in good condition before installation, operation or maintenance.
- Inspect that connections are good between the inverter and PV, battery and grid during installation to prevent damages or injuries caused by bad connections.

## 7.0 Illustrations

### Illustration 2k - User manual(partly)

**⚠ WARNING** **Avoid Misoperation and Inappropriate Usage**

- All the work of this product (system design, installation, operation, setting, configuration and maintenance must be carried out by qualified personnel as required.
- All connections must be in accordance with local and national regulations and standards.
- The inverter and system can inter-connected with the utility grid only if the utility grid permits it.
- All the warning labels or nameplates on the inverter must be clearly visible and must not be removed, covered or pasted.
- The installation should consider the safety of future users when choosing the right position and location as specified in this manual.
- Please keep the children away from touching or misusing the inverter and relevant systems.
- Beware of burning hurt, the inverter and some parts of the system could be hot when working, please do not touch the inverter surface or most of the parts when they are working. During inverter working states, only the LCD and buttons could be touched.

**● NOTICE**

- Please carefully read this manual before any work is carried out on this inverter, the installation, please keep this manual carefully stored and easy to access at any time.
- The qualified personnel should have had training in the installation and commissioning of the electrical system as well as dealing with hazards, also they should have the knowledge of the manual and other related documents. As the installer or operator they are required to be familiar with local regulations and directives.

**7.0 Illustrations**

**Illustration 2I - User manual(partly)**

**6.2 Packaging List & Storing**

**Packaging List**


When the packaging is unpacked, the inner components should match those listed in the list below.



**6.3 Location Selection and Installation**

**1. Requirements for installation location**


- a. The mounting wall should be strong enough to bear the weight of the inverter.
- b. Please maintain the minimum clearances presented below for adequate heat dissipation.

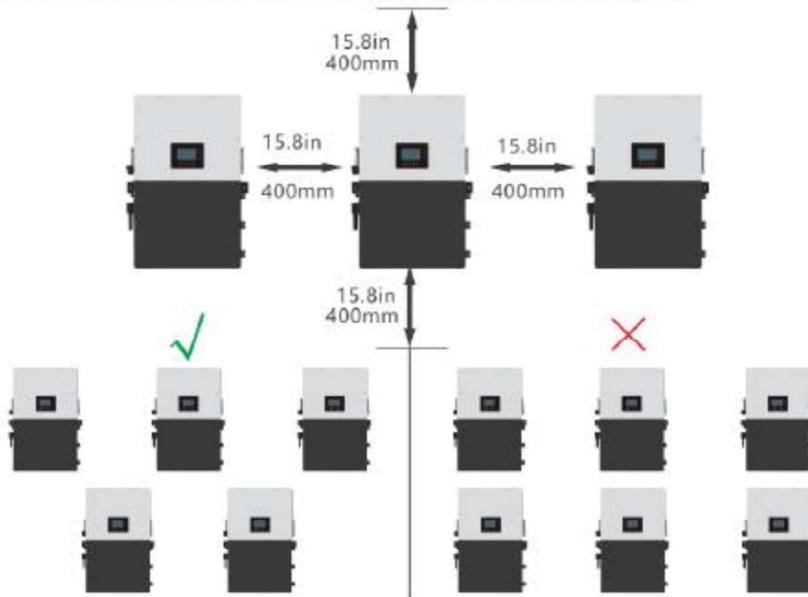


**7.0 Illustrations**

**Illustration 2m - User manual(partly)**

c. Never position the inverter in direct sunlight, rain, or snow. Please refer to the figure below and choose a well-shaded site or a shed to protect the inverter from direct sunlight, rain, and snow etc. PROTECT the LCD screen from excessive UV exposure

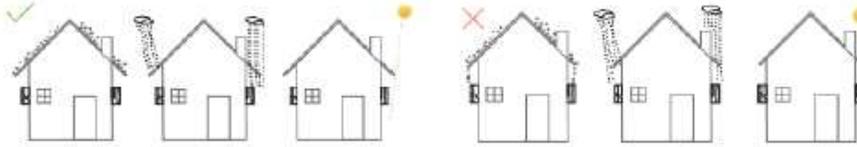


d. The inverter should be installed upright on a vertical surface.

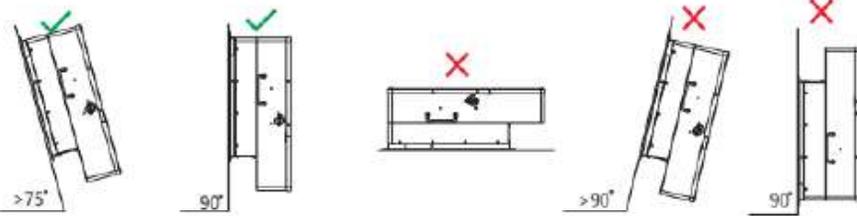

**2. Installing the inverter**

The inverter is wall-mounted type and, should be installed on a vertical, solid mounting surface, such as wood studs, brick or concrete wall. Two or more persons may be needed to install the inverter due to its weight. The slots on the mounting bracket can accommodate various stud spacings from 12inches(305mm) to 16inches(406mm).

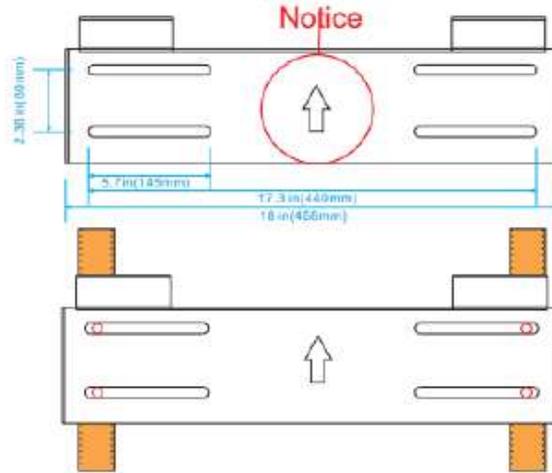


The mounting steps are as below: (Use brick wall as example)


## 7.0 Illustrations

### Illustration 2n - User manual(partly)


**Step1.** Mark the drill holes positions with the mounting bracket, then drill four 48mm(5/16inch) diameter holes, making sure the depth of the holes is deeper than 50mm(2inches).

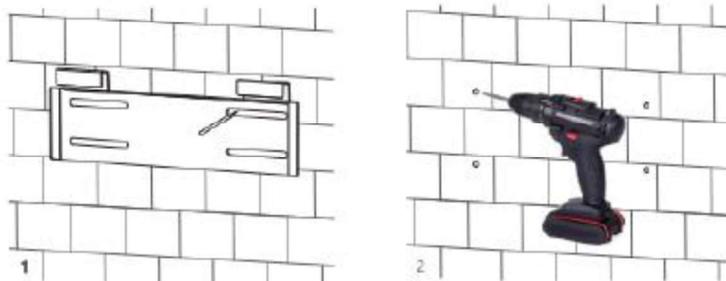

**Step2.** Install and tighten the expansion bolts into the holes. Then use the corresponding nuts and washers (packaged together with the expansion bolts) to install and fix the wall-mounting bracket on the wall.

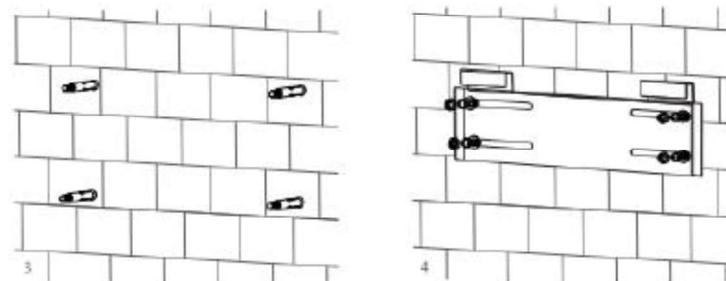

**Step3.** Hang the inverter onto the wall-mounting bracket and lock the inverter on the wall using 2 self-tapping screws on the top of the inverter, lock the safety screws on the left and right sides.

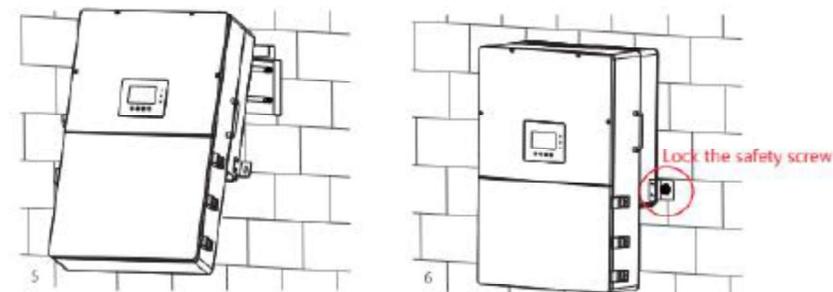

For installation on wood studs


## 6.4 Connection Overview

### 1. System Connection

**7.0 Illustrations**

**Illustration 2o - User manual(partly)**


The system connection diagram is as below( for US version):

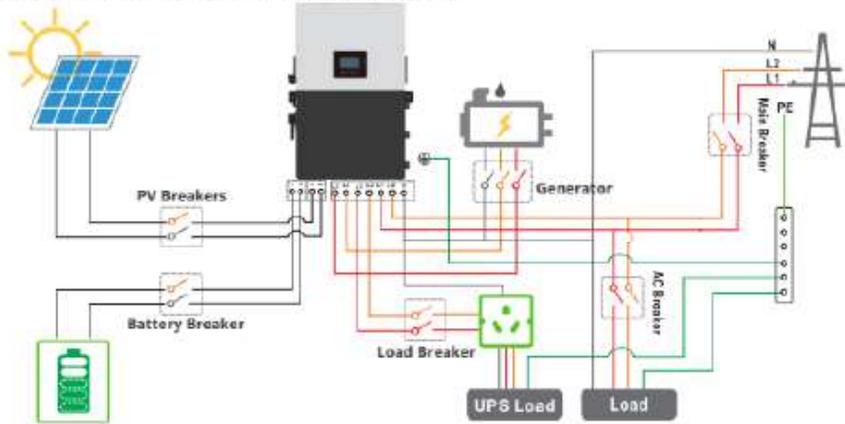

Breakers selection recommendation for both DC and AC


|                            |  |
|----------------------------|--|
| Inverter model             | 12K  |
| PV Breakers(2Px4)          | MPPT1 string 1 : 600V/20A<br>MPPT1 string 2 : 600V/20A<br>MPPT2: 600V/20A<br>MPPT3: 600V/20A               |
| Main Breaker(2P)           | 200A/240Vac when ups is used for whole home backup<br>100A/240Vac when ups is used for partial load backup |
| Generator breaker          | 100A/240Vac  |
| Integrated Battery Breaker | 200A x 2   |
| Integrated Load Breaker    | L1:200A<br>L2:200A   |

**Overview of Connection Ports**

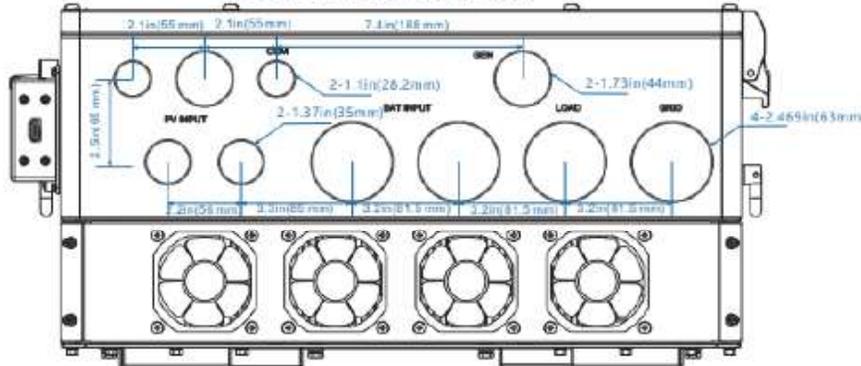


**7.0 Illustrations**

**Illustration 2p - User manual(partly)**

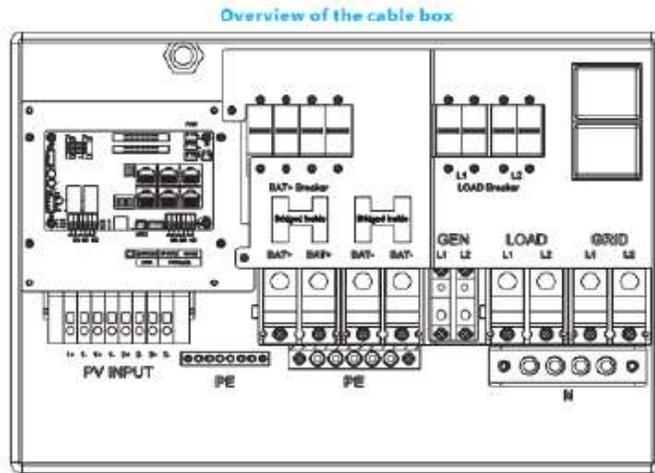

The inverter has integrated Load breaker and BAT breaker, and the Load breaker is 200A, the BAT breaker is 2x200A

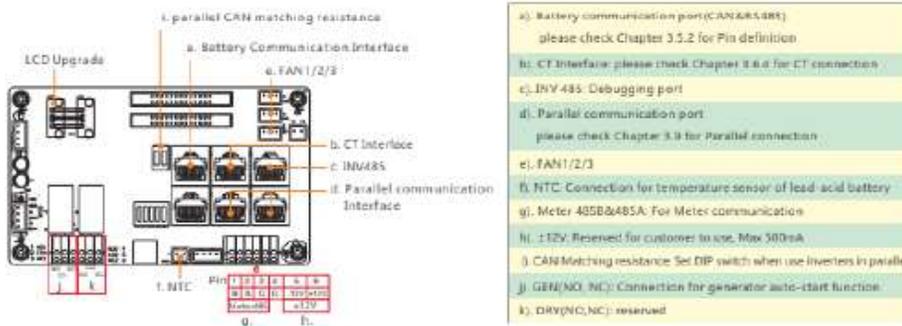

**2. PV Connection**

The PV connection of this hybrid inverter is the same as that a traditional on-grid solar inverter (string inverter).

**Cable Requirement:**


| Cable Size                      | Minimum Voltage |
|---------------------------------|-----------------|
| 10-BAWG(5 - 8 mm <sup>2</sup> ) | 600V            |

**WARNING**

\* Please double check the lowest ambient temperature of the installation location. The rated Voc on solar panel nameplate is obtained at 25°C. As the ambient temperature drops, the Solar panel Voc increases. Please ensure the Maximum solar string voltage corrected at the lowest temperature does not exceed the inverter's maximum input voltage of 550V.

## 7.0 Illustrations

### Illustration 2q - User manual(partly)

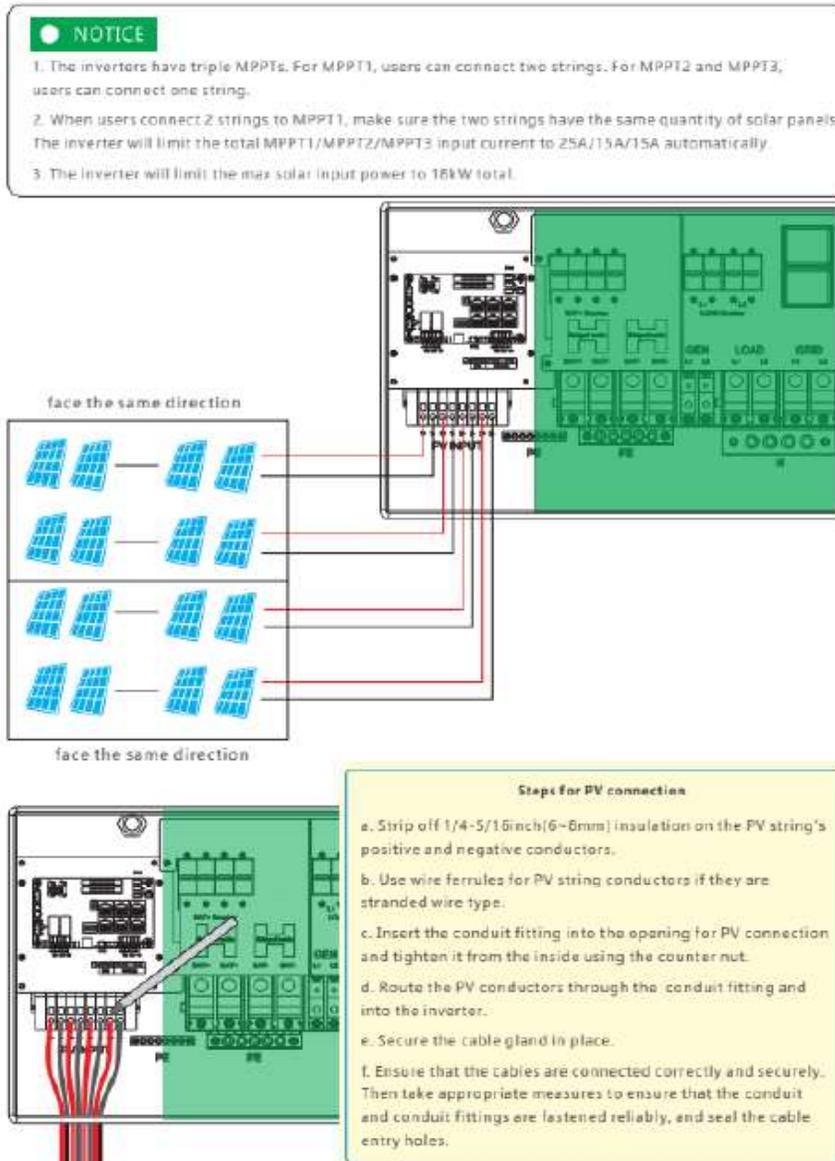

### 3. Battery Connection


**7.0 Illustrations**

**Illustration 2r - User manual(partly)**

Cable Requirement:

| Model | Cable Size                          | Minimum Voltage | Torque for cable connection |
|-------|-------------------------------------|-----------------|-----------------------------|
| 12K   | 2/0-3/0 AWG(65-85 mm <sup>2</sup> ) | 600V            | 9-18(N.M)                   |


- Step 1: Strip 1/4-5/16inch(6-8mm) insulation from the cable end and crimp OT rings for the cable ends.
- Step 2: Route the battery power cable, connect positive to BAT+,negative to BAT-.
- Step 3: Secure the conduit fitting to the enclosure using the counter nut.
- Step 4: Fasten the OT rings of battery positive and negative cables to the lugs according to the markings.
- Step 5: Fix the cable gland in place.

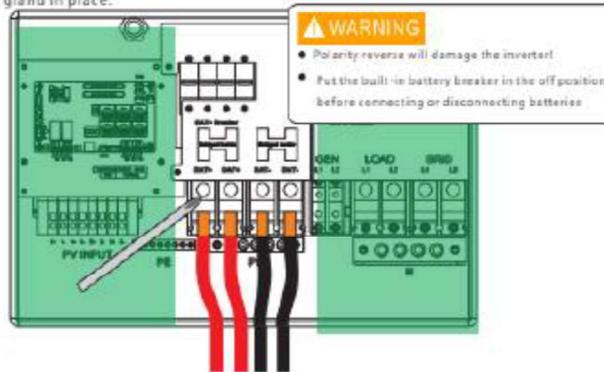

**4. Battery communication cable connection**

Correct battery communication cable must be used to connect the battery to the inverter when users choose lithium-ion battery type. Please select 'Lead-acid' type if the lithium battery can not communicate with the inverter. The battery communication port on inverter is an RJ45 socket, Pin for the RJ45 plug of the communication cable is as below. Make the communication cable according to the below inverter Pin and the correct pinout of communication port on battery. The inverter supports both CAN and Rs485 communication.

| Pin | Description |
|-----|-------------|
| 1   | NC          |
| 2   | GND         |
| 3   | NC          |
| 4   | BAT CANH    |
| 5   | BAT CANL    |
| 6   | NC          |
| 7   | BAT RS485 A |
| 8   | BAT RS485 B |

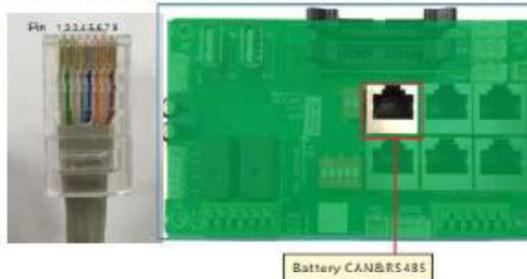

**7.0 Illustrations**

**Illustration 3 - Ratings**

| Model                                   | 51.2-100V2-LUX<br>12K1                       | 51.2-100V3-LUX<br>12K1 | 51.2-100V4-LUX<br>12K1 | 51.2-100V5-LUX<br>12K1 |
|---|--|------------------------|------------------------|------------------------|
| <b>Battery data</b>                     |  |                        |                        |                        |
| Battery type                            | LiFePO4                                      |                        |                        |                        |
| Total capacity                          | 200Ah  | 300Ah                  | 400Ah                  | 500Ah                  |
| Total energy                            | 10.24kWh                                     | 15.36kWh               | 20.48kWh               | 25.6kWh                |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |                        |                        |                        |
| Nominal voltage                         | 51.2 d.c.V                                   |                        |                        |                        |
| Max. charge current                     | 140 d.c.A                                    | 210 d.c.A              | 250 d.c.A              | 250 d.c.A              |
| Max. discharge current                  | 200 d.c.A                                    | 250 d.c.A              | 250 d.c.A              | 250 d.c.A              |
| Parallel Number                         | 1S2P   | 1S3P                   | 1S4P                   | 1S5P                   |
| <b>PV Input data</b>                    |  |                        |                        |                        |
| Max. input voltage                      | 600 d.c.V                                    |                        |                        |                        |
| PV input voltage range                  | 120-500 d.c.V                                |                        |                        |                        |
| Max. input continuous current           | 25/15/15 d.c.A                               |                        |                        |                        |
| Max. short circuit current              | 31/19/19 d.c.A                               |                        |                        |                        |
| <b>AC input/output for grid</b>         |  |                        |                        |                        |
| Nominal voltage                         | 240/208Vac                                   |                        |                        |                        |
| Max. input/output current               | 50 a.c.A @ 240 a.c.V<br>50 a.c.A @ 208 a.c.V |                        |                        |                        |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |                        |                        |                        |
| Nominal input/output power              | 12KW @ 240 a.c.V<br>10.4KW @ 208 a.c.V       |                        |                        |                        |
| Max. output apparent Power              | 12KVA @ 240 a.c.V<br>10.4KVA @ 208 a.c.V     |                        |                        |                        |
| Max. output over current protection     | 63A, 1pcs                                    |                        |                        |                        |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                        |                        |                        |
| Frequency                               | 60Hz   |                        |                        |                        |
| <b>AC output for off-grid</b>           |  |                        |                        |                        |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |                        |                        |                        |
| Max. continuous current                 | 50 a.c.A @ 240 a.c.V<br>50 a.c.A @ 208 a.c.V |                        |                        |                        |
| Max. AC power                           | 12kVA @ 240 a.c.V<br>10.24kVA @ 208 a.c.V    |                        |                        |                        |
| AC frequency                            | 60Hz   |                        |                        |                        |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                        |                        |                        |
| <b>General Data</b>                     |  |                        |                        |                        |
| Charging Temperature Range              | -5°C to 50°C                                 |                        |                        |                        |
| Discharging Temperature Range           | -20°C to 55°C                                |                        |                        |                        |
| Install Location                        | Indoor use                                   |                        |                        |                        |
| Protection Class                        | IP20   |                        |                        |                        |

**7.0 Illustrations**

**Illustration 3a - Ratings**

| Model                                   | 51.2-100V6-LUX<br>12K1                       | 51.2-100V7-LUX<br>12K1 | 51.2-100V8-LUX<br>12K1 | 51.2-100V9-LUX<br>12K1 |
|---|--|------------------------|------------------------|------------------------|
| <b>Battery data</b>                     |  |                        |                        |                        |
| Battery type                            | LiFePO4                                      |                        |                        |                        |
| Total capacity                          | 600Ah  | 700Ah                  | 800Ah                  | 900Ah                  |
| Total energy                            | 30.72kWh                                     | 35.84kWh               | 40.96kWh               | 46.08kWh               |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |                        |                        |                        |
| Nominal voltage                         | 51.2 d.c.V                                   |                        |                        |                        |
| Max. charge current                     | 250 d.c.A                                    | 250 d.c.A              | 250 d.c.A              | 250 d.c.A              |
| Max. discharge current                  | 250 d.c.A                                    | 250 d.c.A              | 250 d.c.A              | 250 d.c.A              |
| Parallel Number                         | 1S6P   | 1S7P                   | 1S8P                   | 1S9P                   |
| <b>PV Input data</b>                    |  |                        |                        |                        |
| Max. input voltage                      | 600 d.c.V                                    |                        |                        |                        |
| PV input voltage range                  | 120-500 d.c.V                                |                        |                        |                        |
| Max. input continuous current           | 25/15/15 d.c.A                               |                        |                        |                        |
| Max. short circuit current              | 31/19/19 d.c.A                               |                        |                        |                        |
| <b>AC input/output for grid</b>         |  |                        |                        |                        |
| Nominal voltage                         | 240/208Vac                                   |                        |                        |                        |
| Max. input/output current               | 50 a.c.A @ 240 a.c.V<br>50 a.c.A @ 208 a.c.V |                        |                        |                        |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |                        |                        |                        |
| Nominal input/output power              | 12KW @ 240 a.c.V<br>10.4KW @ 208 a.c.V       |                        |                        |                        |
| Max. output apparent Power              | 12KVA @ 240 a.c.V<br>10.4KVA @ 208 a.c.V     |                        |                        |                        |
| Max. output over current protection     | 63A, 1pcs                                    |                        |                        |                        |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                        |                        |                        |
| Frequency                               | 60Hz   |                        |                        |                        |
| <b>AC output for off-grid</b>           |  |                        |                        |                        |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |                        |                        |                        |
| Max. continuous current                 | 50 a.c.A @ 240 a.c.V<br>50 a.c.A @ 208 a.c.V |                        |                        |                        |
| Max. AC power                           | 12kVA @ 240 a.c.V<br>10.24kVA @ 208 a.c.V    |                        |                        |                        |
| AC frequency                            | 60Hz   |                        |                        |                        |
| Output power factor                     | 0.8 Leading to 0.8 Lagging                   |                        |                        |                        |
| <b>General Data</b>                     |  |                        |                        |                        |
| Charging Temperature Range              | -5°C to 50°C                                 |                        |                        |                        |
| Discharging Temperature Range           | -20°C to 55°C                                |                        |                        |                        |
| Install Location                        | Indoor use                                   |                        |                        |                        |
| Protection Class                        | IP20   |                        |                        |                        |

**7.0 Illustrations**

**Illustration 3b - Ratings**

| Model                                   | 51.2-100V10-LUX<br>12K1                      | 51.2-100V11-LUX<br>12K1 | 51.2-100V12-LUX<br>12K1 | 51.2-100V13-LUX<br>12K1 |
|---|--|-------------------------|-------------------------|-------------------------|
| <b>Battery data</b>                     |  |                         |                         |                         |
| Battery type                            | LiFePO4                                      |                         |                         |                         |
| Total capacity                          | 1000Ah                                       | 1100Ah                  | 1200Ah                  | 1300Ah                  |
| Total energy                            | 51.2kWh                                      | 56.32kWh                | 61.44kWh                | 66.56kWh                |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |                         |                         |                         |
| Nominal voltage                         | 51.2 d.c.V                                   |                         |                         |                         |
| Max. charge current                     | 250 d.c.A                                    | 250 d.c.A               | 250 d.c.A               | 250 d.c.A               |
| Max. discharge current                  | 250 d.c.A                                    | 250 d.c.A               | 250 d.c.A               | 250 d.c.A               |
| Parallel Number                         | 1S10P  | 1S11P                   | 1S12P                   | 1S13P                   |
| <b>PV Input data</b>                    |  |                         |                         |                         |
| Max. input voltage                      | 600 d.c.V                                    |                         |                         |                         |
| PV input voltage range                  | 120-500 d.c.V                                |                         |                         |                         |
| Max. input continuous current           | 25/15/15 d.c.A                               |                         |                         |                         |
| Max. short circuit current              | 31/19/19 d.c.A                               |                         |                         |                         |
| <b>AC input/output for grid</b>         |  |                         |                         |                         |
| Nominal voltage                         | 240/208Vac                                   |                         |                         |                         |
| Max. input/output current               | 50 a.c.A @ 240 a.c.V<br>50 a.c.A @ 208 a.c.V |                         |                         |                         |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |                         |                         |                         |
| Nominal input/output power              | 12KW @ 240 a.c.V<br>10.4KW @ 208 a.c.V       |                         |                         |                         |
| Max. output apparent Power              | 12KVA @ 240 a.c.V<br>10.4KVA @ 208 a.c.V     |                         |                         |                         |
| Max. output over current protection     | 63A, 1pcs                                    |                         |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                         |                         |                         |
| Frequency                               | 60Hz   |                         |                         |                         |
| <b>AC output for off-grid</b>           |  |                         |                         |                         |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |                         |                         |                         |
| Max. continuous current                 | 50 a.c.A @ 240 a.c.V<br>50 a.c.A @ 208 a.c.V |                         |                         |                         |
| Max. AC power                           | 12kVA @ 240 a.c.V<br>10.24kVA @ 208 a.c.V    |                         |                         |                         |
| AC frequency                            | 60Hz   |                         |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                         |                         |                         |
| <b>General Data</b>                     |  |                         |                         |                         |
| Charging Temperature Range              | -5°C to 50°C                                 |                         |                         |                         |
| Discharging Temperature Range           | -20°C to 55°C                                |                         |                         |                         |
| Install Location                        | Indoor use                                   |                         |                         |                         |
| Protection Class                        | IP20   |                         |                         |                         |

**7.0 Illustrations**

**Illustration 3c - Ratings**

|   |  |
|---|--|
| Model                                   | 51.2-100V14-LUX 12K1                         |
| <b>Battery data</b>                     |  |
| Battery type                            | LiFePO4                                      |
| Total capacity                          | 1400Ah                                       |
| Total energy                            | 71.68kWh                                     |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |
| Nominal voltage                         | 51.2 d.c.V                                   |
| Max. charge current                     | 250 d.c.A                                    |
| Max. discharge current                  | 250 d.c.A                                    |
| Parallel Number                         | 1S14P  |
| <b>PV Input data</b>                    |  |
| Max. input voltage                      | 600 d.c.V                                    |
| PV input voltage range                  | 120-500 d.c.V                                |
| Max. input continuous current           | 25/15/15 d.c.A                               |
| Max. short circuit current              | 31/19/19 d.c.A                               |
| <b>AC input/output for grid</b>         |  |
| Nominal voltage                         | 240/208Vac                                   |
| Max. input/output current               | 50 a.c.A @ 240 a.c.V<br>50 a.c.A @ 208 a.c.V |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |
| Nominal input/output power              | 12KW @ 240 a.c.V<br>10.4KW @ 208 a.c.V       |
| Max. output apparent Power              | 12KVA @ 240 a.c.V<br>10.4KVA @ 208 a.c.V     |
| Max. output over current protection     | 63A, 1pcs                                    |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |
| Frequency                               | 60Hz   |
| <b>AC output for off-grid</b>           |  |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |
| Max. continuous current                 | 50 a.c.A @ 240 a.c.V<br>50 a.c.A @ 208 a.c.V |
| Max. AC power                           | 12kVA @ 240 a.c.V<br>10.24kVA @ 208 a.c.V    |
| AC frequency                            | 60Hz   |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |
| <b>General Data</b>                     |  |
| Charging Temperature Range              | -5°C to 50°C                                 |
| Discharging Temperature Range           | -20°C to 55°C                                |
| Install Location                        | Indoor use                                   |
| Protection Class                        | IP20   |

**7.0 Illustrations**

**Illustration 3d - Ratings**

| Model                                   | 51.2-100V4-LUX<br>12K2                         | 51.2-100V5-LUX<br>12K2 | 51.2-100V6-LUX<br>12K2 | 51.2-100V7-LUX<br>12K2 |
|---|--|------------------------|------------------------|------------------------|
| <b>Battery data</b>                     |  |                        |                        |                        |
| Battery type                            | LiFePO4  |                        |                        |                        |
| Total capacity                          | 400Ah  | 500Ah                  | 600Ah                  | 700Ah                  |
| Total energy                            | 20.48kWh                                       | 25.6kWh                | 30.72kWh               | 35.84kWh               |
| Battery voltage range                   | 44.8-57.6 d.c.V                                |                        |                        |                        |
| Nominal voltage                         | 51.2 d.c.V                                     |                        |                        |                        |
| Max. charge current                     | 280 d.c.A                                      | 350 d.c.A              | 420 d.c.A              | 490 d.c.A              |
| Max. discharge current                  | 400 d.c.A                                      | 500 d.c.A              | 500 d.c.A              | 500 d.c.A              |
| Parallel Number                         | 1S4P   | 1S5P                   | 1S6P                   | 1S7P                   |
| <b>PV Input data</b>                    |  |                        |                        |                        |
| Max. input voltage                      | 600 d.c.V                                      |                        |                        |                        |
| PV input voltage range                  | 120-500 d.c.V                                  |                        |                        |                        |
| Max. input continuous current           | 25/15/15 d.c.A *2                              |                        |                        |                        |
| Max. short circuit current              | 31/19/19 d.c.A *2                              |                        |                        |                        |
| <b>AC input/output for grid</b>         |  |                        |                        |                        |
| Nominal voltage                         | 240/208Vac                                     |                        |                        |                        |
| Max. input/output current               | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                        |                        |                        |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                         |                        |                        |                        |
| Nominal input/output power              | 24KW @ 240 a.c.V<br>20.8KW @ 208 a.c.V         |                        |                        |                        |
| Max. output apparent Power              | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                        |                        |                        |
| Max. output over current protection     | 63A, 1pcs                                      |                        |                        |                        |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                        |                        |                        |
| Frequency                               | 60Hz   |                        |                        |                        |
| <b>AC output for off-grid</b>           |  |                        |                        |                        |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                 |                        |                        |                        |
| Max. continuous current                 | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                        |                        |                        |
| Max. AC power                           | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                        |                        |                        |
| AC frequency                            | 60Hz   |                        |                        |                        |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                        |                        |                        |
| <b>General Data</b>                     |  |                        |                        |                        |
| Charging Temperature Range              | -5°C to 50°C                                   |                        |                        |                        |
| Discharging Temperature Range           | -20°C to 55°C                                  |                        |                        |                        |
| Install Location                        | Indoor use                                     |                        |                        |                        |
| Protection Class                        | IP20   |                        |                        |                        |

**7.0 Illustrations**

**Illustration 3e - Ratings**

| Model                                   | 51.2-100V8-LUX<br>12K2                         | 51.2-100V9-LUX<br>12K2 | 51.2-100V10-LUX<br>12K2 | 51.2-100V11-LUX<br>12K2 |
|---|--|------------------------|-------------------------|-------------------------|
| <b>Battery data</b>                     |  |                        |                         |                         |
| Battery type                            | LiFePO4  |                        |                         |                         |
| Total capacity                          | 800Ah  | 900Ah                  | 1000Ah                  | 1100Ah                  |
| Total energy                            | 40.96kWh                                       | 46.08kWh               | 51.2kWh                 | 56.32kWh                |
| Battery voltage range                   | 44.8-57.6 d.c.V                                |                        |                         |                         |
| Nominal voltage                         | 51.2 d.c.V                                     |                        |                         |                         |
| Max. charge current                     | 500 d.c.A                                      | 500 d.c.A              | 500 d.c.A               | 500 d.c.A               |
| Max. discharge current                  | 500 d.c.A                                      | 500 d.c.A              | 500 d.c.A               | 500 d.c.A               |
| Parallel Number                         | 1S8P   | 1S9P                   | 1S10P                   | 1S11P                   |
| <b>PV Input data</b>                    |  |                        |                         |                         |
| Max. input voltage                      | 600 d.c.V                                      |                        |                         |                         |
| PV input voltage range                  | 120-500 d.c.V                                  |                        |                         |                         |
| Max. input continuous current           | 25/15/15 d.c.A *2                              |                        |                         |                         |
| Max. short circuit current              | 31/19/19 d.c.A *2                              |                        |                         |                         |
| <b>AC input/output for grid</b>         |  |                        |                         |                         |
| Nominal voltage                         | 240/208Vac                                     |                        |                         |                         |
| Max. input/output current               | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                        |                         |                         |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                         |                        |                         |                         |
| Nominal input/output power              | 24KW @ 240 a.c.V<br>20.8KW @ 208 a.c.V         |                        |                         |                         |
| Max. output apparent Power              | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                        |                         |                         |
| Max. output over current protection     | 63A, 1pcs                                      |                        |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                        |                         |                         |
| Frequency                               | 60Hz   |                        |                         |                         |
| <b>AC output for off-grid</b>           |  |                        |                         |                         |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                 |                        |                         |                         |
| Max. continuous current                 | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                        |                         |                         |
| Max. AC power                           | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                        |                         |                         |
| AC frequency                            | 60Hz   |                        |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                        |                         |                         |
| <b>General Data</b>                     |  |                        |                         |                         |
| Charging Temperature Range              | -5°C to 50°C                                   |                        |                         |                         |
| Discharging Temperature Range           | -20°C to 55°C                                  |                        |                         |                         |
| Install Location                        | Indoor use                                     |                        |                         |                         |
| Protection Class                        | IP20   |                        |                         |                         |

**7.0 Illustrations**

**Illustration 3f - Ratings**

| Model                                   | 51.2-100V12-LUX<br>12K2                        | 51.2-100V13-LUX<br>12K2 | 51.2-100V14-LUX<br>12K2 | 51.2-100V15-LUX<br>12K2 |
|---|--|-------------------------|-------------------------|-------------------------|
| <b>Battery data</b>                     |  |                         |                         |                         |
| Battery type                            | LiFePO4  |                         |                         |                         |
| Total capacity                          | 1200Ah   | 1300Ah                  | 1400Ah                  | 1500Ah                  |
| Total energy                            | 61.44kWh                                       | 66.56kWh                | 71.68kWh                | 76.8kWh                 |
| Battery voltage range                   | 44.8-57.6 d.c.V                                |                         |                         |                         |
| Nominal voltage                         | 51.2 d.c.V                                     |                         |                         |                         |
| Max. charge current                     | 500 d.c.A                                      | 500 d.c.A               | 500 d.c.A               | 500 d.c.A               |
| Max. discharge current                  | 500 d.c.A                                      | 500 d.c.A               | 500 d.c.A               | 500 d.c.A               |
| Parallel Number                         | 1S12P  | 1S13P                   | 1S14P                   | 1S15P                   |
| <b>PV Input data</b>                    |  |                         |                         |                         |
| Max. input voltage                      | 600 d.c.V                                      |                         |                         |                         |
| PV input voltage range                  | 120-500 d.c.V                                  |                         |                         |                         |
| Max. input continuous current           | 25/15/15 d.c.A *2                              |                         |                         |                         |
| Max. short circuit current              | 31/19/19 d.c.A *2                              |                         |                         |                         |
| <b>AC input/output for grid</b>         |  |                         |                         |                         |
| Nominal voltage                         | 240/208Vac                                     |                         |                         |                         |
| Max. input/output current               | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                         |                         |                         |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                         |                         |                         |                         |
| Nominal input/output power              | 24KW @ 240 a.c.V<br>20.8KW @ 208 a.c.V         |                         |                         |                         |
| Max. output apparent Power              | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                         |                         |                         |
| Max. output over current protection     | 63A, 1pcs                                      |                         |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                         |                         |                         |
| Frequency                               | 60Hz   |                         |                         |                         |
| <b>AC output for off-grid</b>           |  |                         |                         |                         |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                 |                         |                         |                         |
| Max. continuous current                 | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                         |                         |                         |
| Max. AC power                           | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                         |                         |                         |
| AC frequency                            | 60Hz   |                         |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                         |                         |                         |
| <b>General Data</b>                     |  |                         |                         |                         |
| Charging Temperature Range              | -5°C to 50°C                                   |                         |                         |                         |
| Discharging Temperature Range           | -20°C to 55°C                                  |                         |                         |                         |
| Install Location                        | Indoor use                                     |                         |                         |                         |
| Protection Class                        | IP20   |                         |                         |                         |

**7.0 Illustrations**

**Illustration 3g - Ratings**

| Model                                   | 51.2-100V16-LUX<br>12K2                        | 51.2-100V17-LUX<br>12K2 | 51.2-100V18-LUX<br>12K2 | 51.2-100V19-LUX<br>12K2 |
|---|--|-------------------------|-------------------------|-------------------------|
| <b>Battery data</b>                     |  |                         |                         |                         |
| Battery type                            | LiFePO4  |                         |                         |                         |
| Total capacity                          | 1600Ah   | 1700Ah                  | 1800Ah                  | 1900Ah                  |
| Total energy                            | 81.92kWh                                       | 87.04kWh                | 92.16kWh                | 97.28kWh                |
| Battery voltage range                   | 44.8-57.6 d.c.V                                |                         |                         |                         |
| Nominal voltage                         | 51.2 d.c.V                                     |                         |                         |                         |
| Max. charge current                     | 500 d.c.A                                      | 500 d.c.A               | 500 d.c.A               | 500 d.c.A               |
| Max. discharge current                  | 500 d.c.A                                      | 500 d.c.A               | 500 d.c.A               | 500 d.c.A               |
| Parallel Number                         | 1S16P  | 1S17P                   | 1S18P                   | 1S19P                   |
| <b>PV Input data</b>                    |  |                         |                         |                         |
| Max. input voltage                      | 600 d.c.V                                      |                         |                         |                         |
| PV input voltage range                  | 120-500 d.c.V                                  |                         |                         |                         |
| Max. input continuous current           | 25/15/15 d.c.A *2                              |                         |                         |                         |
| Max. short circuit current              | 31/19/19 d.c.A *2                              |                         |                         |                         |
| <b>AC input/output for grid</b>         |  |                         |                         |                         |
| Nominal voltage                         | 240/208Vac                                     |                         |                         |                         |
| Max. input/output current               | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                         |                         |                         |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                         |                         |                         |                         |
| Nominal input/output power              | 24KW @ 240 a.c.V<br>20.8KW @ 208 a.c.V         |                         |                         |                         |
| Max. output apparent Power              | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                         |                         |                         |
| Max. output over current protection     | 63A, 1pcs                                      |                         |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                         |                         |                         |
| Frequency                               | 60Hz   |                         |                         |                         |
| <b>AC output for off-grid</b>           |  |                         |                         |                         |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                 |                         |                         |                         |
| Max. continuous current                 | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                         |                         |                         |
| Max. AC power                           | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                         |                         |                         |
| AC frequency                            | 60Hz   |                         |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                         |                         |                         |
| <b>General Data</b>                     |  |                         |                         |                         |
| Charging Temperature Range              | -5°C to 50°C                                   |                         |                         |                         |
| Discharging Temperature Range           | -20°C to 55°C                                  |                         |                         |                         |
| Install Location                        | Indoor use                                     |                         |                         |                         |
| Protection Class                        | IP20   |                         |                         |                         |

**7.0 Illustrations**

**Illustration 3h - Ratings**

| Model                                   | 51.2-100V20-LUX<br>12K2                        | 51.2-100V21-LUX<br>12K2 | 51.2-100V22-LUX<br>12K2 | 51.2-100V23-LUX<br>12K2 |
|---|--|-------------------------|-------------------------|-------------------------|
| <b>Battery data</b>                     |  |                         |                         |                         |
| Battery type                            | LiFePO4  |                         |                         |                         |
| Total capacity                          | 2000Ah   | 2100Ah                  | 2200Ah                  | 2300Ah                  |
| Total energy                            | 102.4kWh                                       | 107.52kWh               | 112.64kWh               | 117.76kWh               |
| Battery voltage range                   | 44.8-57.6 d.c.V                                |                         |                         |                         |
| Nominal voltage                         | 51.2 d.c.V                                     |                         |                         |                         |
| Max. charge current                     | 500 d.c.A                                      | 500 d.c.A               | 500 d.c.A               | 500 d.c.A               |
| Max. discharge current                  | 500 d.c.A                                      | 500 d.c.A               | 500 d.c.A               | 500 d.c.A               |
| Parallel Number                         | 1S20P  | 1S21P                   | 1S22P                   | 1S23P                   |
| <b>PV Input data</b>                    |  |                         |                         |                         |
| Max. input voltage                      | 600 d.c.V                                      |                         |                         |                         |
| PV input voltage range                  | 120-500 d.c.V                                  |                         |                         |                         |
| Max. input continuous current           | 25/15/15 d.c.A *2                              |                         |                         |                         |
| Max. short circuit current              | 31/19/19 d.c.A *2                              |                         |                         |                         |
| <b>AC input/output for grid</b>         |  |                         |                         |                         |
| Nominal voltage                         | 240/208Vac                                     |                         |                         |                         |
| Max. input/output current               | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                         |                         |                         |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                         |                         |                         |                         |
| Nominal input/output power              | 24KW @ 240 a.c.V<br>20.8KW @ 208 a.c.V         |                         |                         |                         |
| Max. output apparent Power              | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                         |                         |                         |
| Max. output over current protection     | 63A, 1pcs                                      |                         |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                         |                         |                         |
| Frequency                               | 60Hz   |                         |                         |                         |
| <b>AC output for off-grid</b>           |  |                         |                         |                         |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                 |                         |                         |                         |
| Max. continuous current                 | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                         |                         |                         |
| Max. AC power                           | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                         |                         |                         |
| AC frequency                            | 60Hz   |                         |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                         |                         |                         |
| <b>General Data</b>                     |  |                         |                         |                         |
| Charging Temperature Range              | -5°C to 50°C                                   |                         |                         |                         |
| Discharging Temperature Range           | -20°C to 55°C                                  |                         |                         |                         |
| Install Location                        | Indoor use                                     |                         |                         |                         |
| Protection Class                        | IP20   |                         |                         |                         |

**7.0 Illustrations**

**Illustration 3i - Ratings**

| Model                                   | 51.2-100V24-LUX<br>12K2                        | 51.2-100V25-LUX<br>12K2 | 51.2-100V26-LUX<br>12K2 | 51.2-100V27-LUX<br>12K2 |
|---|--|-------------------------|-------------------------|-------------------------|
| <b>Battery data</b>                     |  |                         |                         |                         |
| Battery type                            | LiFePO4  |                         |                         |                         |
| Total capacity                          | 2400Ah   | 2500Ah                  | 2600Ah                  | 2700Ah                  |
| Total energy                            | 122.88kWh                                      | 128kWh                  | 133.12kWh               | 138.24kWh               |
| Battery voltage range                   | 44.8-57.6 d.c.V                                |                         |                         |                         |
| Nominal voltage                         | 51.2 d.c.V                                     |                         |                         |                         |
| Max. charge current                     | 500 d.c.A                                      | 500 d.c.A               | 500 d.c.A               | 500 d.c.A               |
| Max. discharge current                  | 500 d.c.A                                      | 500 d.c.A               | 500 d.c.A               | 500 d.c.A               |
| Parallel Number                         | 1S24P  | 1S25P                   | 1S26P                   | 1S27P                   |
| <b>PV Input data</b>                    |  |                         |                         |                         |
| Max. input voltage                      | 600 d.c.V                                      |                         |                         |                         |
| PV input voltage range                  | 120-500 d.c.V                                  |                         |                         |                         |
| Max. input continuous current           | 25/15/15 d.c.A *2                              |                         |                         |                         |
| Max. short circuit current              | 31/19/19 d.c.A *2                              |                         |                         |                         |
| <b>AC input/output for grid</b>         |  |                         |                         |                         |
| Nominal voltage                         | 240/208Vac                                     |                         |                         |                         |
| Max. input/output current               | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                         |                         |                         |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                         |                         |                         |                         |
| Nominal input/output power              | 24KW @ 240 a.c.V<br>20.8KW @ 208 a.c.V         |                         |                         |                         |
| Max. output apparent Power              | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                         |                         |                         |
| Max. output over current protection     | 63A, 1pcs                                      |                         |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                         |                         |                         |
| Frequency                               | 60Hz   |                         |                         |                         |
| <b>AC output for off-grid</b>           |  |                         |                         |                         |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                 |                         |                         |                         |
| Max. continuous current                 | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |                         |                         |                         |
| Max. AC power                           | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |                         |                         |                         |
| AC frequency                            | 60Hz   |                         |                         |                         |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |                         |                         |                         |
| <b>General Data</b>                     |  |                         |                         |                         |
| Charging Temperature Range              | -5°C to 50°C                                   |                         |                         |                         |
| Discharging Temperature Range           | -20°C to 55°C                                  |                         |                         |                         |
| Install Location                        | Indoor use                                     |                         |                         |                         |
| Protection Class                        | IP20   |                         |                         |                         |

**7.0 Illustrations**

**Illustration 3j - Ratings**

|   |  |
|---|--|
| Model                                   | 51.2-100V28-LUX 12K2                           |
| Battery data                            |  |
| Battery type                            | LiFePO4  |
| Total capacity                          | 2800Ah   |
| Total energy                            | 143.36kWh                                      |
| Battery voltage range                   | 44.8-57.6 d.c.V                                |
| Nominal voltage                         | 51.2 d.c.V                                     |
| Max. charge current                     | 500 d.c.A                                      |
| Max. discharge current                  | 500 d.c.A                                      |
| Parallel Number                         | 1S28P  |
| PV Input data                           |  |
| Max. input voltage                      | 600 d.c.V                                      |
| PV input voltage range                  | 120-500 d.c.V                                  |
| Max. input continuous current           | 25/15/15 d.c.A *2                              |
| Max. short circuit current              | 31/19/19 d.c.A *2                              |
| AC input/output for grid                |  |
| Nominal voltage                         | 240/208Vac                                     |
| Max. input/output current               | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                         |
| Nominal input/output power              | 24KW @ 240 a.c.V<br>20.8KW @ 208 a.c.V         |
| Max. output apparent Power              | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |
| Max. output over current protection     | 63A, 1pcs                                      |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |
| Frequency                               | 60Hz   |
| AC output for off-grid                  |  |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                 |
| Max. continuous current                 | 100 a.c.A @ 240 a.c.V<br>100 a.c.A @ 208 a.c.V |
| Max. AC power                           | 24KVA @ 240 a.c.V<br>20.8KVA @ 208 a.c.V       |
| AC frequency                            | 60Hz   |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                     |
| General Data                            |  |
| Charging Temperature Range              | -5°C to 50°C                                   |
| Discharging Temperature Range           | -20°C to 55°C                                  |
| Install Location                        | Indoor use                                     |
| Protection Class                        | IP20   |

**7.0 Illustrations**

**Illustration 3k - Ratings**

| Model                                   | 51.2-100V2-LUX<br>11.4K1                         | 51.2-100V3-LUX<br>11.4K1 | 51.2-100V4-LUX<br>11.4K1 | 51.2-100V5-LUX<br>11.4K1 |
|---|--|--------------------------|--------------------------|--------------------------|
| <b>Battery data</b>                     |  |                          |                          |                          |
| Battery type                            | LiFePO4  |                          |                          |                          |
| Total capacity                          | 200Ah  | 300Ah                    | 400Ah                    | 500Ah                    |
| Total energy                            | 10.24kWh   | 15.36kWh                 | 20.48kWh                 | 25.6kWh                  |
| Battery voltage range                   | 44.8-57.6 d.c.V                                  |                          |                          |                          |
| Nominal voltage                         | 51.2 d.c.V                                       |                          |                          |                          |
| Max. charge current                     | 140 d.c.A  | 210 d.c.A                | 238 d.c.A                | 238 d.c.A                |
| Max. discharge current                  | 200 d.c.A  | 238 d.c.A                | 238 d.c.A                | 238 d.c.A                |
| Parallel Number                         | 1S2P   | 1S3P                     | 1S4P                     | 1S5P                     |
| <b>PV Input data</b>                    |  |                          |                          |                          |
| Max. input voltage                      | 600 d.c.V  |                          |                          |                          |
| PV input voltage range                  | 120-500 d.c.V                                    |                          |                          |                          |
| Max. input continuous current           | 25/15/15 d.c.A                                   |                          |                          |                          |
| Max. short circuit current              | 31/19/19 d.c.A                                   |                          |                          |                          |
| <b>AC input/output for grid</b>         |  |                          |                          |                          |
| Nominal voltage                         | 240/208Vac                                       |                          |                          |                          |
| Max. input/output current               | 47.5 a.c.A @ 240 a.c.V<br>47.5 a.c.A @ 208 a.c.V |                          |                          |                          |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                           |                          |                          |                          |
| Nominal input/output power              | 11.4KW @ 240 a.c.V<br>9.88KW @ 208 a.c.V         |                          |                          |                          |
| Max. output apparent Power              | 11.4KVA @ 240 a.c.V<br>9.88KVA @ 208 a.c.V       |                          |                          |                          |
| Max. output over current protection     | 63A, 1pcs  |                          |                          |                          |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                       |                          |                          |                          |
| Frequency                               | 60Hz   |                          |                          |                          |
| <b>AC output for off-grid</b>           |  |                          |                          |                          |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                   |                          |                          |                          |
| Max. continuous current                 | 47.5 a.c.A @ 240 a.c.V<br>47.5 a.c.A @ 208 a.c.V |                          |                          |                          |
| Max. AC power                           | 11.4KVA @ 240 a.c.V<br>9.88KVA @ 208 a.c.V       |                          |                          |                          |
| AC frequency                            | 60Hz   |                          |                          |                          |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                       |                          |                          |                          |
| <b>General Data</b>                     |  |                          |                          |                          |
| Charging Temperature Range              | -5°C to 50°C                                     |                          |                          |                          |
| Discharging Temperature Range           | -20°C to 55°C                                    |                          |                          |                          |
| Install Location                        | Indoor use                                       |                          |                          |                          |
| Protection Class                        | IP20   |                          |                          |                          |

**7.0 Illustrations**

**Illustration 3I - Ratings**

| Model                                   | 51.2-100V6-LUX<br>11.4K1                         | 51.2-100V7-LUX<br>11.4K1 | 51.2-100V8-LUX<br>11.4K1 | 51.2-100V9-LUX<br>11.4K1 |
|---|--|--------------------------|--------------------------|--------------------------|
| Battery data                            |  |                          |                          |                          |
| Battery type                            | LiFePO4  |                          |                          |                          |
| Total capacity                          | 600Ah  | 700Ah                    | 800Ah                    | 900Ah                    |
| Total energy                            | 30.72kWh   | 35.84kWh                 | 40.96kWh                 | 46.08kWh                 |
| Battery voltage range                   | 44.8-57.6 d.c.V                                  |                          |                          |                          |
| Nominal voltage                         | 51.2 d.c.V                                       |                          |                          |                          |
| Max. charge current                     | 238 d.c.A  | 238 d.c.A                | 238 d.c.A                | 238 d.c.A                |
| Max. discharge current                  | 238 d.c.A  | 238 d.c.A                | 238 d.c.A                | 238 d.c.A                |
| Parallel Number                         | 1S6P   | 1S7P                     | 1S8P                     | 1S9P                     |
| PV Input data                           |  |                          |                          |                          |
| Max. input voltage                      | 600 d.c.V  |                          |                          |                          |
| PV input voltage range                  | 120-500 d.c.V                                    |                          |                          |                          |
| Max. input continuous current           | 25/15/15 d.c.A                                   |                          |                          |                          |
| Max. short circuit current              | 31/19/19 d.c.A                                   |                          |                          |                          |
| AC input/output for grid                |  |                          |                          |                          |
| Nominal voltage                         | 240/208Vac                                       |                          |                          |                          |
| Max. input/output current               | 47.5 a.c.A @ 240 a.c.V<br>47.5 a.c.A @ 208 a.c.V |                          |                          |                          |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                           |                          |                          |                          |
| Nominal input/output power              | 11.4KW @ 240 a.c.V<br>9.88KW @ 208 a.c.V         |                          |                          |                          |
| Max. output apparent Power              | 11.4KVA @ 240 a.c.V<br>9.88KVA @ 208 a.c.V       |                          |                          |                          |
| Max. output over current protection     | 63A, 1pcs  |                          |                          |                          |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                       |                          |                          |                          |
| Frequency                               | 60Hz   |                          |                          |                          |
| AC output for off-grid                  |  |                          |                          |                          |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                   |                          |                          |                          |
| Max. continuous current                 | 47.5 a.c.A @ 240 a.c.V<br>47.5 a.c.A @ 208 a.c.V |                          |                          |                          |
| Max. AC power                           | 11.4KVA @ 240 a.c.V<br>9.88KVA @ 208 a.c.V       |                          |                          |                          |
| AC frequency                            | 60Hz   |                          |                          |                          |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                       |                          |                          |                          |
| General Data                            |  |                          |                          |                          |
| Charging Temperature Range              | -5°C to 50°C                                     |                          |                          |                          |
| Discharging Temperature Range           | -20°C to 55°C                                    |                          |                          |                          |
| Install Location                        | Indoor use                                       |                          |                          |                          |
| Protection Class                        | IP20   |                          |                          |                          |

**7.0 Illustrations**

**Illustration 3m - Ratings**

| Model                                   | 51.2-100V10-LUX<br>11.4K1                        | 51.2-100V11-LUX<br>11.4K1 | 51.2-100V12-LUX<br>11.4K1 | 51.2-100V13-LUX<br>11.4K1 |
|---|--|---------------------------|---------------------------|---------------------------|
| <b>Battery data</b>                     |  |                           |                           |                           |
| Battery type                            | LiFePO4  |                           |                           |                           |
| Total capacity                          | 1000Ah   | 1100Ah                    | 1200Ah                    | 1300Ah                    |
| Total energy                            | 51.2kWh  | 56.32kWh                  | 61.44kWh                  | 66.56kWh                  |
| Battery voltage range                   | 44.8-57.6 d.c.V                                  |                           |                           |                           |
| Nominal voltage                         | 51.2 d.c.V                                       |                           |                           |                           |
| Max. charge current                     | 238 d.c.A  | 238 d.c.A                 | 238 d.c.A                 | 238 d.c.A                 |
| Max. discharge current                  | 238 d.c.A  | 238 d.c.A                 | 238 d.c.A                 | 238 d.c.A                 |
| Parallel Number                         | 1S10P  | 1S11P                     | 1S12P                     | 1S13P                     |
| <b>PV Input data</b>                    |  |                           |                           |                           |
| Max. input voltage                      | 600 d.c.V  |                           |                           |                           |
| PV input voltage range                  | 120-500 d.c.V                                    |                           |                           |                           |
| Max. input continuous current           | 25/15/15 d.c.A                                   |                           |                           |                           |
| Max. short circuit current              | 31/19/19 d.c.A                                   |                           |                           |                           |
| <b>AC input/output for grid</b>         |  |                           |                           |                           |
| Nominal voltage                         | 240/208Vac                                       |                           |                           |                           |
| Max. input/output current               | 47.5 a.c.A @ 240 a.c.V<br>47.5 a.c.A @ 208 a.c.V |                           |                           |                           |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                           |                           |                           |                           |
| Nominal input/output power              | 11.4KW @ 240 a.c.V<br>9.88KW @ 208 a.c.V         |                           |                           |                           |
| Max. output apparent Power              | 11.4KVA @ 240 a.c.V<br>9.88KVA @ 208 a.c.V       |                           |                           |                           |
| Max. output over current protection     | 63A, 1pcs  |                           |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                       |                           |                           |                           |
| Frequency                               | 60Hz   |                           |                           |                           |
| <b>AC output for off-grid</b>           |  |                           |                           |                           |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                   |                           |                           |                           |
| Max. continuous current                 | 47.5 a.c.A @ 240 a.c.V<br>47.5 a.c.A @ 208 a.c.V |                           |                           |                           |
| Max. AC power                           | 11.4KVA @ 240 a.c.V<br>9.88KVA @ 208 a.c.V       |                           |                           |                           |
| AC frequency                            | 60Hz   |                           |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                       |                           |                           |                           |
| <b>General Data</b>                     |  |                           |                           |                           |
| Charging Temperature Range              | -5°C to 50°C                                     |                           |                           |                           |
| Discharging Temperature Range           | -20°C to 55°C                                    |                           |                           |                           |
| Install Location                        | Indoor use                                       |                           |                           |                           |
| Protection Class                        | IP20   |                           |                           |                           |

**7.0 Illustrations**

**Illustration 3n - Ratings**

|   |  |
|---|--|
| Model                                   | 51.2-100V14-LUX 11.4K1                           |
| Battery data                            |  |
| Battery type                            | LiFePO4  |
| Total capacity                          | 1400Ah   |
| Total energy                            | 71.68kWh   |
| Battery voltage range                   | 44.8-57.6 d.c.V                                  |
| Nominal voltage                         | 51.2 d.c.V                                       |
| Max. charge current                     | 238 d.c.A  |
| Max. discharge current                  | 238 d.c.A  |
| Parallel Number                         | 1S14P  |
| PV Input data                           |  |
| Max. input voltage                      | 600 d.c.V  |
| PV input voltage range                  | 120-500 d.c.V                                    |
| Max. input continuous current           | 25/15/15 d.c.A                                   |
| Max. short circuit current              | 31/19/19 d.c.A                                   |
| AC input/output for grid                |  |
| Nominal voltage                         | 240/208Vac                                       |
| Max. input/output current               | 47.5 a.c.A @ 240 a.c.V<br>47.5 a.c.A @ 208 a.c.V |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                           |
| Nominal input/output power              | 11.4KW @ 240 a.c.V<br>9.88KW @ 208 a.c.V         |
| Max. output apparent Power              | 11.4KVA @ 240 a.c.V<br>9.88KVA @ 208 a.c.V       |
| Max. output over current protection     | 63A, 1pcs  |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                       |
| Frequency                               | 60Hz   |
| AC output for off-grid                  |  |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase                   |
| Max. continuous current                 | 47.5 a.c.A @ 240 a.c.V<br>47.5 a.c.A @ 208 a.c.V |
| Max. AC power                           | 11.4KVA @ 240 a.c.V<br>9.88KVA @ 208 a.c.V       |
| AC frequency                            | 60Hz   |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                       |
| General Data                            |  |
| Charging Temperature Range              | -5°C to 50°C                                     |
| Discharging Temperature Range           | -20°C to 55°C                                    |
| Install Location                        | Indoor use                                       |
| Protection Class                        | IP20   |

**7.0 Illustrations**

**Illustration 3o - Ratings**

| Model                                   | 51.2-100V4-LUX<br>11.4K2                     | 51.2-100V5-LUX<br>11.4K2 | 51.2-100V6-LUX<br>11.4K2 | 51.2-100V7-LUX<br>11.4K2 |
|---|--|--------------------------|--------------------------|--------------------------|
| <b>Battery data</b>                     |  |                          |                          |                          |
| Battery type                            | LiFePO4                                      |                          |                          |                          |
| Total capacity                          | 400Ah  | 500Ah                    | 600Ah                    | 700Ah                    |
| Total energy                            | 20.48kWh                                     | 25.6kWh                  | 30.72kWh                 | 35.84kWh                 |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |                          |                          |                          |
| Nominal voltage                         | 51.2 d.c.V                                   |                          |                          |                          |
| Max. charge current                     | 280 d.c.A                                    | 350 d.c.A                | 420 d.c.A                | 476 d.c.A                |
| Max. discharge current                  | 400 d.c.A                                    | 476 d.c.A                | 476 d.c.A                | 476 d.c.A                |
| Parallel Number                         | 1S4P   | 1S5P                     | 1S6P                     | 1S7P                     |
| <b>PV Input data</b>                    |  |                          |                          |                          |
| Max. input voltage                      | 600 d.c.V                                    |                          |                          |                          |
| PV input voltage range                  | 120-500 d.c.V                                |                          |                          |                          |
| Max. input continuous current           | 25/15/15 d.c.A *2                            |                          |                          |                          |
| Max. short circuit current              | 31/19/19 d.c.A *2                            |                          |                          |                          |
| <b>AC input/output for grid</b>         |  |                          |                          |                          |
| Nominal voltage                         | 240/208Vac                                   |                          |                          |                          |
| Max. input/output current               | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                          |                          |                          |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |                          |                          |                          |
| Nominal input/output power              | 22.8KW @ 240 a.c.V<br>19.76KW @ 208 a.c.V    |                          |                          |                          |
| Max. output apparent Power              | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                          |                          |                          |
| Max. output over current protection     | 63A, 1pcs                                    |                          |                          |                          |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                          |                          |                          |
| Frequency                               | 60Hz   |                          |                          |                          |
| <b>AC output for off-grid</b>           |  |                          |                          |                          |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |                          |                          |                          |
| Max. continuous current                 | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                          |                          |                          |
| Max. AC power                           | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                          |                          |                          |
| AC frequency                            | 60Hz   |                          |                          |                          |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                          |                          |                          |
| <b>General Data</b>                     |  |                          |                          |                          |
| Charging Temperature Range              | -5°C to 50°C                                 |                          |                          |                          |
| Discharging Temperature Range           | -20°C to 55°C                                |                          |                          |                          |
| Install Location                        | Indoor use                                   |                          |                          |                          |
| Protection Class                        | IP20   |                          |                          |                          |

**7.0 Illustrations**

**Illustration 3p - Ratings**

| Model                                   | 51.2-100V8-LUX<br>11.4K2                     | 51.2-100V9-LUX<br>11.4K2 | 51.2-100V10-LUX<br>11.4K2 | 51.2-100V11-LUX<br>11.4K2 |
|---|--|--------------------------|---------------------------|---------------------------|
| <b>Battery data</b>                     |  |                          |                           |                           |
| Battery type                            | LiFePO4                                      |                          |                           |                           |
| Total capacity                          | 800Ah  | 900Ah                    | 1000Ah                    | 1100Ah                    |
| Total energy                            | 40.96kWh                                     | 46.08kWh                 | 51.2kWh                   | 56.32kWh                  |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |                          |                           |                           |
| Nominal voltage                         | 51.2 d.c.V                                   |                          |                           |                           |
| Max. charge current                     | 476 d.c.A                                    | 476 d.c.A                | 476 d.c.A                 | 476 d.c.A                 |
| Max. discharge current                  | 476 d.c.A                                    | 476 d.c.A                | 476 d.c.A                 | 476 d.c.A                 |
| Parallel Number                         | 1S8P   | 1S9P                     | 1S10P                     | 1S11P                     |
| <b>PV Input data</b>                    |  |                          |                           |                           |
| Max. input voltage                      | 600 d.c.V                                    |                          |                           |                           |
| PV input voltage range                  | 120-500 d.c.V                                |                          |                           |                           |
| Max. input continuous current           | 25/15/15 d.c.A *2                            |                          |                           |                           |
| Max. short circuit current              | 31/19/19 d.c.A *2                            |                          |                           |                           |
| <b>AC input/output for grid</b>         |  |                          |                           |                           |
| Nominal voltage                         | 240/208Vac                                   |                          |                           |                           |
| Max. input/output current               | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                          |                           |                           |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |                          |                           |                           |
| Nominal input/output power              | 22.8KW @ 240 a.c.V<br>19.76KW @ 208 a.c.V    |                          |                           |                           |
| Max. output apparent Power              | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                          |                           |                           |
| Max. output over current protection     | 63A, 1pcs                                    |                          |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                          |                           |                           |
| Frequency                               | 60Hz   |                          |                           |                           |
| <b>AC output for off-grid</b>           |  |                          |                           |                           |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |                          |                           |                           |
| Max. continuous current                 | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                          |                           |                           |
| Max. AC apparent power                  | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                          |                           |                           |
| AC frequency                            | 60Hz   |                          |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                          |                           |                           |
| <b>General Data</b>                     |  |                          |                           |                           |
| Charging Temperature Range              | -5°C to 50°C                                 |                          |                           |                           |
| Discharging Temperature Range           | -20°C to 55°C                                |                          |                           |                           |
| Install Location                        | Indoor use                                   |                          |                           |                           |
| Protection Class                        | IP20   |                          |                           |                           |

**7.0 Illustrations**

**Illustration 3q - Ratings**

| Model                                   | 51.2-100V12-LUX<br>11.4K2                    | 51.2-100V13-LUX<br>11.4K2 | 51.2-100V14-LUX<br>11.4K2 | 51.2-100V15-LUX<br>11.4K2 |
|---|--|---------------------------|---------------------------|---------------------------|
| <b>Battery data</b>                     |  |                           |                           |                           |
| Battery type                            | LiFePO4                                      |                           |                           |                           |
| Total capacity                          | 1200Ah                                       | 1300Ah                    | 1400Ah                    | 1500Ah                    |
| Total energy                            | 61.44kWh                                     | 66.56kWh                  | 71.68kWh                  | 76.8kWh                   |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |                           |                           |                           |
| Nominal voltage                         | 51.2 d.c.V                                   |                           |                           |                           |
| Max. charge current                     | 476 d.c.A                                    | 476 d.c.A                 | 476 d.c.A                 | 476 d.c.A                 |
| Max. discharge current                  | 476 d.c.A                                    | 476 d.c.A                 | 476 d.c.A                 | 476 d.c.A                 |
| Parallel Number                         | 1S12P  | 1S13P                     | 1S14P                     | 1S15P                     |
| <b>PV Input data</b>                    |  |                           |                           |                           |
| Max. input voltage                      | 600 d.c.V                                    |                           |                           |                           |
| PV input voltage range                  | 120-500 d.c.V                                |                           |                           |                           |
| Max. input continuous current           | 25/15/15 d.c.A *2                            |                           |                           |                           |
| Max. short circuit current              | 31/19/19 d.c.A *2                            |                           |                           |                           |
| <b>AC input/output for grid</b>         |  |                           |                           |                           |
| Nominal voltage                         | 240/208Vac                                   |                           |                           |                           |
| Max. input/output current               | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                           |                           |                           |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |                           |                           |                           |
| Nominal input/output power              | 22.8KW @ 240 a.c.V<br>19.76KW @ 208 a.c.V    |                           |                           |                           |
| Max. output apparent Power              | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                           |                           |                           |
| Max. output over current protection     | 63A, 1pcs                                    |                           |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                           |                           |                           |
| Frequency                               | 60Hz   |                           |                           |                           |
| <b>AC output for off-grid</b>           |  |                           |                           |                           |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |                           |                           |                           |
| Max. continuous current                 | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                           |                           |                           |
| Max. AC power                           | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                           |                           |                           |
| AC frequency                            | 60Hz   |                           |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                           |                           |                           |
| <b>General Data</b>                     |  |                           |                           |                           |
| Charging Temperature Range              | -5°C to 50°C                                 |                           |                           |                           |
| Discharging Temperature Range           | -20°C to 55°C                                |                           |                           |                           |
| Install Location                        | Indoor use                                   |                           |                           |                           |
| Protection Class                        | IP20   |                           |                           |                           |

**7.0 Illustrations**

**Illustration 3r - Ratings**

| Model                                   | 51.2-100V16-LUX<br>11.4K2                    | 51.2-100V17-LUX<br>11.4K2 | 51.2-100V18-LUX<br>11.4K2 | 51.2-100V19-LUX<br>11.4K2 |
|---|--|---------------------------|---------------------------|---------------------------|
| <b>Battery data</b>                     |  |                           |                           |                           |
| Battery type                            | LiFePO4                                      |                           |                           |                           |
| Total capacity                          | 1600Ah                                       | 1700Ah                    | 1800Ah                    | 1900Ah                    |
| Total energy                            | 81.92kWh                                     | 87.04kWh                  | 92.16kWh                  | 97.28kWh                  |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |                           |                           |                           |
| Nominal voltage                         | 51.2 d.c.V                                   |                           |                           |                           |
| Max. charge current                     | 476 d.c.A                                    | 476 d.c.A                 | 476 d.c.A                 | 476 d.c.A                 |
| Max. discharge current                  | 476 d.c.A                                    | 476 d.c.A                 | 476 d.c.A                 | 476 d.c.A                 |
| Parallel Number                         | 1S16P  | 1S17P                     | 1S18P                     | 1S19P                     |
| <b>PV Input data</b>                    |  |                           |                           |                           |
| Max. input voltage                      | 600 d.c.V                                    |                           |                           |                           |
| PV input voltage range                  | 120-500 d.c.V                                |                           |                           |                           |
| Max. input continuous current           | 25/15/15 d.c.A *2                            |                           |                           |                           |
| Max. short circuit current              | 31/19/19 d.c.A *2                            |                           |                           |                           |
| <b>AC input/output for grid</b>         |  |                           |                           |                           |
| Nominal voltage                         | 240/208Vac                                   |                           |                           |                           |
| Max. input/output current               | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                           |                           |                           |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |                           |                           |                           |
| Nominal input/output power              | 22.8KW @ 240 a.c.V<br>19.76KW @ 208 a.c.V    |                           |                           |                           |
| Max. output apparent Power              | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                           |                           |                           |
| Max. output over current protection     | 63A, 1pcs                                    |                           |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                           |                           |                           |
| Frequency                               | 60Hz   |                           |                           |                           |
| <b>AC output for off-grid</b>           |  |                           |                           |                           |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |                           |                           |                           |
| Max. continuous current                 | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                           |                           |                           |
| Max. AC power                           | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                           |                           |                           |
| AC frequency                            | 60Hz   |                           |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                           |                           |                           |
| <b>General Data</b>                     |  |                           |                           |                           |
| Charging Temperature Range              | -5°C to 50°C                                 |                           |                           |                           |
| Discharging Temperature Range           | -20°C to 55°C                                |                           |                           |                           |
| Install Location                        | Indoor use                                   |                           |                           |                           |
| Protection Class                        | IP20   |                           |                           |                           |

**7.0 Illustrations**

**Illustration 3s - Ratings**

| Model                                   | 51.2-100V20-LUX<br>11.4K2                    | 51.2-100V21-LUX<br>11.4K2 | 51.2-100V22-LUX<br>11.4K2 | 51.2-100V23-LUX<br>11.4K2 |
|---|--|---------------------------|---------------------------|---------------------------|
| <b>Battery data</b>                     |  |                           |                           |                           |
| Battery type                            | LiFePO4                                      |                           |                           |                           |
| Total capacity                          | 2000Ah                                       | 2100Ah                    | 2200Ah                    | 2300Ah                    |
| Total energy                            | 102.4kWh                                     | 107.52kWh                 | 112.64kWh                 | 117.76kWh                 |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |                           |                           |                           |
| Nominal voltage                         | 51.2 d.c.V                                   |                           |                           |                           |
| Max. charge current                     | 476 d.c.A                                    | 476 d.c.A                 | 476 d.c.A                 | 476 d.c.A                 |
| Max. discharge current                  | 476 d.c.A                                    | 476 d.c.A                 | 476 d.c.A                 | 476 d.c.A                 |
| Parallel Number                         | 1S20P  | 1S21P                     | 1S22P                     | 1S23P                     |
| <b>PV Input data</b>                    |  |                           |                           |                           |
| Max. input voltage                      | 600 d.c.V                                    |                           |                           |                           |
| PV input voltage range                  | 120-500 d.c.V                                |                           |                           |                           |
| Max. input continuous current           | 25/15/15 d.c.A *2                            |                           |                           |                           |
| Max. short circuit current              | 31/19/19 d.c.A *2                            |                           |                           |                           |
| <b>AC input/output for grid</b>         |  |                           |                           |                           |
| Nominal voltage                         | 240/208Vac                                   |                           |                           |                           |
| Max. input/output current               | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                           |                           |                           |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |                           |                           |                           |
| Nominal input/output power              | 22.8KW @ 240 a.c.V<br>19.76KW @ 208 a.c.V    |                           |                           |                           |
| Max. output apparent Power              | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                           |                           |                           |
| Max. output over current protection     | 63A, 1pcs                                    |                           |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                           |                           |                           |
| Frequency                               | 60Hz   |                           |                           |                           |
| <b>AC output for off-grid</b>           |  |                           |                           |                           |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |                           |                           |                           |
| Max. continuous current                 | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                           |                           |                           |
| Max. AC power                           | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                           |                           |                           |
| AC frequency                            | 60Hz   |                           |                           |                           |
| Output power factor                     | 0.8 Leading to 0.8 Lagging                   |                           |                           |                           |
| <b>General Data</b>                     |  |                           |                           |                           |
| Charging Temperature Range              | -5°C to 50°C                                 |                           |                           |                           |
| Discharging Temperature Range           | -20°C to 55°C                                |                           |                           |                           |
| Install Location                        | Indoor use                                   |                           |                           |                           |
| Protection Class                        | IP20   |                           |                           |                           |

**7.0 Illustrations**

**Illustration 3t - Ratings**

| Model                                   | 51.2-100V24-LUX<br>11.4K2                    | 51.2-100V25-LUX<br>11.4K2 | 51.2-100V26-LUX<br>11.4K2 | 51.2-100V27-LUX<br>11.4K2 |
|---|--|---------------------------|---------------------------|---------------------------|
| <b>Battery data</b>                     |  |                           |                           |                           |
| Battery type                            | LiFePO4                                      |                           |                           |                           |
| Total capacity                          | 2400Ah                                       | 2500Ah                    | 2600Ah                    | 2700Ah                    |
| Total energy                            | 122.88kWh                                    | 128kWh                    | 133.12kWh                 | 138.24kWh                 |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |                           |                           |                           |
| Nominal voltage                         | 51.2 d.c.V                                   |                           |                           |                           |
| Max. charge current                     | 476 d.c.A                                    | 476 d.c.A                 | 476 d.c.A                 | 476 d.c.A                 |
| Max. discharge current                  | 476 d.c.A                                    | 476 d.c.A                 | 476 d.c.A                 | 476 d.c.A                 |
| Parallel Number                         | 1S24P  | 1S25P                     | 1S26P                     | 1S27P                     |
| <b>PV Input data</b>                    |  |                           |                           |                           |
| Max. input voltage                      | 600 d.c.V                                    |                           |                           |                           |
| PV input voltage range                  | 120-500 d.c.V                                |                           |                           |                           |
| Max. input continuous current           | 25/15/15 d.c.A *2                            |                           |                           |                           |
| Max. short circuit current              | 31/19/19 d.c.A *2                            |                           |                           |                           |
| <b>AC input/output for grid</b>         |  |                           |                           |                           |
| Nominal voltage                         | 240/208Vac                                   |                           |                           |                           |
| Max. input/output current               | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                           |                           |                           |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |                           |                           |                           |
| Nominal input/output power              | 22.8KW @ 240 a.c.V<br>19.76KW @ 208 a.c.V    |                           |                           |                           |
| Max. output apparent Power              | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                           |                           |                           |
| Max. output over current protection     | 63A, 1pcs                                    |                           |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                           |                           |                           |
| Frequency                               | 60Hz   |                           |                           |                           |
| <b>AC output for off-grid</b>           |  |                           |                           |                           |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |                           |                           |                           |
| Max. continuous current                 | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |                           |                           |                           |
| Max. AC power                           | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |                           |                           |                           |
| AC frequency                            | 60Hz   |                           |                           |                           |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |                           |                           |                           |
| <b>General Data</b>                     |  |                           |                           |                           |
| Charging Temperature Range              | -5°C to 50°C                                 |                           |                           |                           |
| Discharging Temperature Range           | -20°C to 55°C                                |                           |                           |                           |
| Install Location                        | Indoor use                                   |                           |                           |                           |
| Protection Class                        | IP20   |                           |                           |                           |

**7.0 Illustrations**

**Illustration 3u - Ratings**

|   |  |
|---|--|
| Model                                   | 51.2-100V28-LUX 11.4K2                       |
| <b>Battery data</b>                     |  |
| Battery type                            | LiFePO4                                      |
| Total capacity                          | 2800Ah                                       |
| Total energy                            | 143.36kWh                                    |
| Battery voltage range                   | 44.8-57.6 d.c.V                              |
| Nominal voltage                         | 51.2 d.c.V                                   |
| Max. charge current                     | 476 d.c.A                                    |
| Max. discharge current                  | 476 d.c.A                                    |
| Parallel Number                         | 1S28P  |
| <b>PV Input data</b>                    |  |
| Max. input voltage                      | 600 d.c.V                                    |
| PV input voltage range                  | 120-500 d.c.V                                |
| Max. input continuous current           | 25/15/15 d.c.A *2                            |
| Max. short circuit current              | 31/19/19 d.c.A *2                            |
| <b>AC input/output for grid</b>         |  |
| Nominal voltage                         | 240/208Vac                                   |
| Max. input/output current               | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |
| Max. short circuit current and duration | 156A peak @100us, 1pcs                       |
| Nominal input/output power              | 22.8KW @ 240 a.c.V<br>19.76KW @ 208 a.c.V    |
| Max. output apparent Power              | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |
| Max. output over current protection     | 63A, 1pcs                                    |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |
| Frequency                               | 60Hz   |
| <b>AC output for off-grid</b>           |  |
| Nominal voltage                         | 208Vac, 120/240Vac Split Phase               |
| Max. continuous current                 | 95 a.c.A @ 240 a.c.V<br>95 a.c.A @ 208 a.c.V |
| Max. AC power                           | 22.8KVA @ 240 a.c.V<br>19.76KVA @ 208 a.c.V  |
| AC frequency                            | 60Hz   |
| Output power factor rating              | 0.8 Leading to 0.8 Lagging                   |
| <b>General Data</b>                     |  |
| Charging Temperature Range              | -5°C to 50°C                                 |
| Discharging Temperature Range           | -20°C to 55°C                                |
| Install Location                        | Indoor use                                   |
| Protection Class                        | IP20   |



| <b>9.0 Correlation Page For Multiple Listings</b>   |   |
|---|---|
| The following products, which are identical to those identified in this report except for model number and Listee name, are authorized to bear the ETL label under provisions of the Intertek Multiple Listing Program. |   |
| BASIC LISTEE  | Energie Volthium Inc                                  |
| Address   | 2600 Boulevard Ford #100, Chateauguay, Quebec J6J 4Z2 |
| Country   | Canada  |
| Product   | Energy Storge Systems                                 |

|                                 |      |
|---------------------------------|------|
| MULTIPLE LISTEE 1               | None |
| Address                         |      |
| Country                         |      |
| Brand Name                      |      |
| ASSOCIATED MANUFACTURER         |      |
| Address                         |      |
| Country                         |      |
| <b>MULTIPLE LISTEE 1 MODELS</b> |      |
| <b>BASIC LISTEE MODELS</b>      |      |
|                                 |      |

|                                 |      |
|---------------------------------|------|
| MULTIPLE LISTEE 2               | None |
| Address                         |      |
| Country                         |      |
| Brand Name                      |      |
| ASSOCIATED MANUFACTURER         |      |
| Address                         |      |
| Country                         |      |
| <b>MULTIPLE LISTEE 2 MODELS</b> |      |
| <b>BASIC LISTEE MODELS</b>      |      |
|                                 |      |

|                                 |      |
|---------------------------------|------|
| MULTIPLE LISTEE 3               | None |
| Address                         |      |
| Country                         |      |
| Brand Name                      |      |
| ASSOCIATED MANUFACTURER         |      |
| Address                         |      |
| Country                         |      |
| <b>MULTIPLE LISTEE 3 MODELS</b> |      |
| <b>BASIC LISTEE MODELS</b>      |      |
|                                 |      |

## 10.0 General Information

The Applicant and Manufacturer have agreed to produce, test and label ETL Listed products in accordance with the requirements of this Report. The Manufacturer has also agreed to notify Intertek and to request authorization prior to using alternate parts, components or materials.

### COMPONENTS

Components used shall be those itemized in this Intertek report covering the product, including any amendments and/or revisions.

### LISTING MARK

The ETL Listing mark applied to the products shall either be separable in form, such as labels purchased from Intertek, or on a product nameplate or other media only as specifically authorized by Intertek. Use of the mark is subject to the control of Intertek.

The mark must include the following four items:

- 1) applicable country identifiers "US" and/or "C" or "US", "C" and "EU"
- 2) the word "Listed" or "Classified" or "Recognized Component" (whichever is appropriate)
- 3) a control number issued by Intertek
- 4) a product descriptor that identifies the standards used for certification. Example:

**For US standards**, the words, "Conforms to" shall appear with the standard number along with the word, "Standard" or "Std." Example: "Conforms to ANSI/UL Std. XX."

**For Canadian standards**, the words "Certified to CAN/CSA Standard CXX No. XX." shall be used, or abbreviated, "Cert. to CAN/CSA Std. CXX No. XX."

Can be used together when both standards are used.

**If all standards on the ATM have the same standard title**, the shared title or its abbreviation may be used in place of the examples above. Example: "Medical Electrical Equipment" or "MEE"; "Information Technology Equipment" or "ITE"; "Audio/Video Information And Communication Technology Equipment" or "AV ICTE".

**Note: A facsimile must be submitted to Intertek, Attn: Follow-up Services for approval prior to use.**

The facsimile need not have a control number. A control number will be issued **after signed Certification**

**Agreements** have been received by the Follow-up Services office, approval of the facsimile of your proposed Listing Mark, satisfactory completion of the Listing Report, and scheduling of a factory assessment in your facility.

### MANUFACTURING AND PRODUCTION TESTS

Manufacturing and Production Tests shall be performed as required in this Report.

### FOLLOW-UP SERVICE

Periodic unannounced audits of the manufacturing facility (and any locations authorized to apply the mark) shall be scheduled by Intertek. An audit report shall be issued after each visit. Special attention will be given to the following:

1. Conformance of the manufactured product to the descriptions in this Report.
2. Conformance of the use of the ETL mark with the requirements of this Report and the Certification Agreement.
3. Manufacturing changes.
4. Performance of specified Manufacturing and Production Tests.

In the event that the Intertek representative identifies non-conformance(s) to any provision of this Report, the Applicant shall take one or more of the following actions:

1. Correct the non-conformance.
2. Remove the ETL Mark from non-conforming product.
3. Contact the issuing product safety evaluation center for instructions.

### **10.1 Evaluation of Unlisted Components**

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

**The Applicant will be notified, in writing, via the applicable contact methods, as defined in Section 1.0, when these components must be selected and sent to Component Evaluation Center (CEC) for re-evaluation.**

**Due to particular testing requirements, some components may be requested to be shipped to specific labs. Thus, specific shipment destination(s) for each sample will be provided in the written notification.**

Managing CEC Location:

Intertek Testing Services Shenzhen Limited Guangzhou Branch

ETL Component Evaluation Center

Room 101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District

Guangzhou, Guangdong, China

Attn: Ms. Joey Kuang

Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

**11.0 Manufacturing and Production Tests**

The manufacturer agrees to conduct the following Manufacturing and Production Tests as specified:

**Required Tests**

None

