

TECHNICAL SHEET


12V 130AH BATTERY



Bluetooth (with Volthium Bluetooth Dongle \$)



Self-Heating (optional \$)

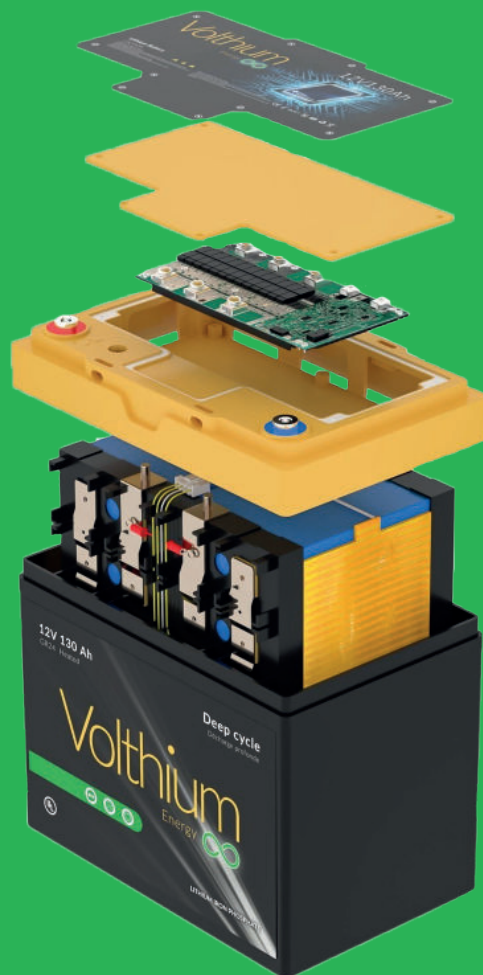

ELECTRICAL SPECIFICATIONS

Voltage	12.8 volt
Capacity	130 Ah
Capacity @ 20A	390 min
Energy	1664 Wh
Auto-discharge	<3% per month
Maximum unit in series	4
Maximum unit in parallel	4

STORAGE SPECIFICATIONS

Storage temperature	From -20 to 45°C
Storage voltage	From 13.1V to 13.3V

COMMUNICATIONS SPECIFICATIONS

Bluetooth	Dongle BT require (accessory)
Communication ports	RJ45 (RS485)
LCD screen	No
Volthium CAN Hub Communication (VE.CAN)	Compatible

CHARGE SPECIFICATIONS

Recommended Charge Current	5 A - 50 A
Maximum Charge Current	100 A
Recommended Charge Voltage	14.2 V - 14.6 V (Bulk) 13.6 V (Float)

HEATING SPECIFICATIONS (OPTIONAL)

Activation temperature	From -35 to 11 °C
Activation current	6 A
Heating current	3 A
System activation mode	Manual

DISCHARGE SPECIFICATIONS

Continuous discharge current	100 A
BMS - Discharge disconnect voltage	10 V
BMS - Discharge reconnection voltage	12 V
Short circuit protection	Yes

NUMBER OF CYCLES ACCORDING TO THE AVERAGE DISCHARGE % OF USE


30% discharge	8200 < cycles
80% discharge	6000 < cycles
100% discharge	3500 < cycles

TEMPERATURE SPECIFICATIONS

Discharge temperature	From -30 to 60°C
Charging temperature	From 0 to 45°C

MECHANICAL SPECIFICATIONS

Dimensions	260 X 168 X 229 mm 10.24 X 6.61 X 9.01 po
Group / format	GR24
Weight	15kg / 33 lbs
Terminal Type	M8
Tightening torque on terminals	N/A

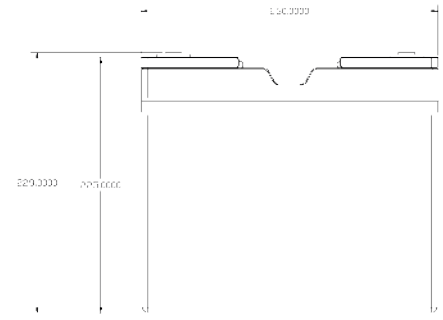

CERTIFICATIONS & DESIGN

Design	4S2P
Certifications	Battery UL2054 Cells UL1973
Shipping Classification	UN 3480 CLASS 9
Cell type	SquareCell - LiFePO4 - 67AH 3.2V Grade A+

