

AVENTURA 12V 300Ah

Bluetooth / Self Heating

Technical Specifications



CHARGE SPECIFICATIONS	
Recommended Charge Current	5 A - 80 A (14.6V - 60 A)
Maximum Charge Current	150 A
Recommended Charge Voltage	14.2 V - 14.6 V (Bulk) 13.6 V (Float)
High Voltage Disconnect	16.7 V
High Voltage Reconnect	16.4 V

TEMPERATURE SPECIFICATIONS	
Charge Temperature	0 to 45 °C
Discharge Temperature	-25 to 60 °C
High Disconnect Temperature	60 °C
High Reconnect Temperature	55 °C
Storage Temperature	-10 à 45 °C

AUTOHEATING SPECIFICATIONS (Optional)	
Heating Temperature	-35 to 11 °C
Activation Current	11 A
Heating Current	9 A
Manual activation of heating function possible	YES

COMMUNICATIONS SPECIFICATIONS	
Bluetooth	Dongle BT require (accessory)
Communication ports	SMBUS / RS485
LCD screen with battery voltage displayed	NO
Volthium CAN Hub Communication (VECAN)	Compatible



ELECTRICAL SPECIFICATIONS	
Voltage	12.8 volt
Capacity	300 Ah
Capacity @ 20A	900 min
Energy	3840 Wh
Auto-Discharge	<3% per Month
Maximum Unit in Series	4
Maximum Unit in Parallel	4

DISCHARGE SPECIFICATIONS	
Continuous Discharge Current	150A (& 250A @ 45min)
Peak Discharge Current	200 A (30s)
Disconnect Charge Current	300 A (1s)
Low Voltage Disconnect	10 V
Low Voltage Reconnect	12 V
Short Circuit Protection	yes


NUMBER OF CYCLES ACCORDING TO THE DISCHARGE %	
Discharge 30%	8200< cycles
Discharge 80%	6000< cycles
Discharge 100%	3000< cycles

Remaining integrity (SOH) of 83% after 3560 discharges cycles at 100% @ 1C


MECHANICAL SPECIFICATIONS	
Dimensions (LxWxD) Group 8D	520 x 268 x 244 mm 20.47 x 10.55 x 9.6 po
Weight	73 lbs
Terminal Type	M8
Ingress Protection Marking	IP65
Terminal torque requirement	8-10 nm / 6-8 ft/lb

CERTIFICATIONS & CONCEPTION	
Conception	4S3P
Certifications	Cells : UL1642 / UL1973 / UL9540A / IEC62619 / IEC62660
Shipping Classification	UN 3480 CLASS 9
Cell Type	SquareCell - LiFePO4 - 3.2V Grade A+


Aventura (LiFePO4) vs Lead Acid
At VARIOUS RATES OF DISCHARGE

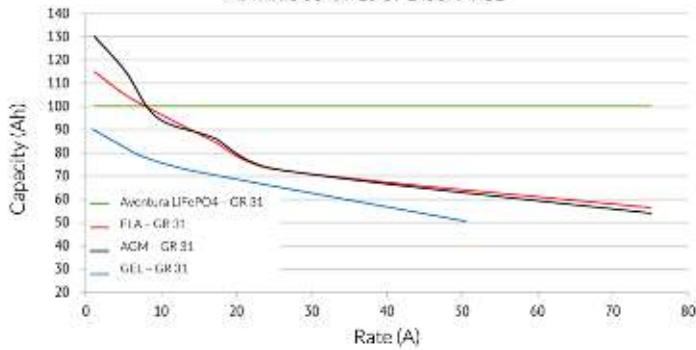


Cycle life vs depth of discharge (DOD)
Discharge 0.5C / Charge 0.5 @ 25°C (77°F)

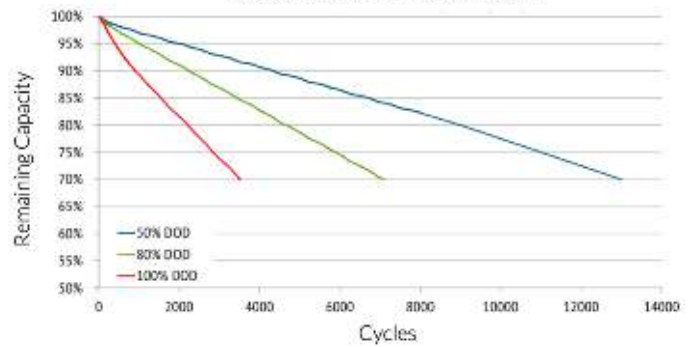


Discharge voltage characteristics at various RATES

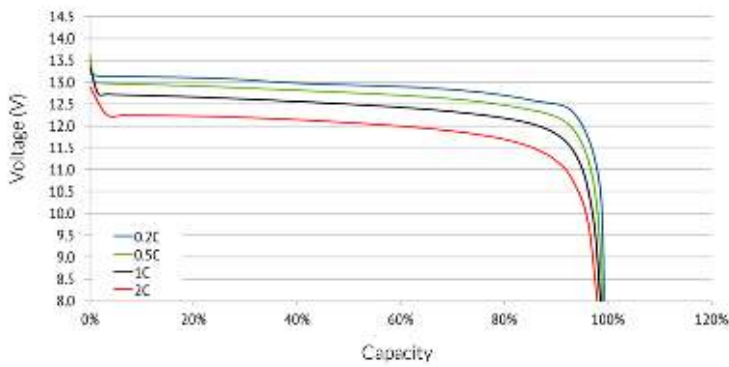


Discharge voltage characteristics at various TEMPERATURES

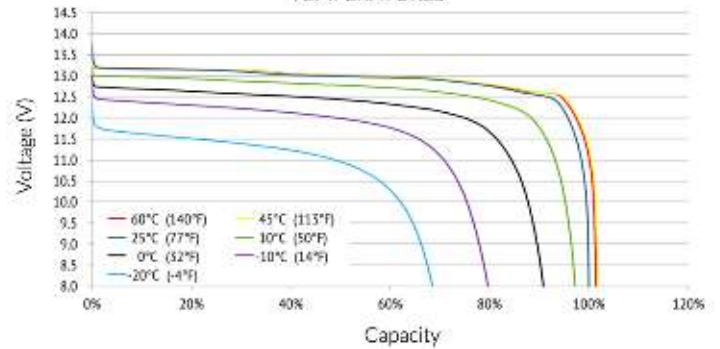

Charge voltage characteristics at various TEMPERATURE
charge 0.2C

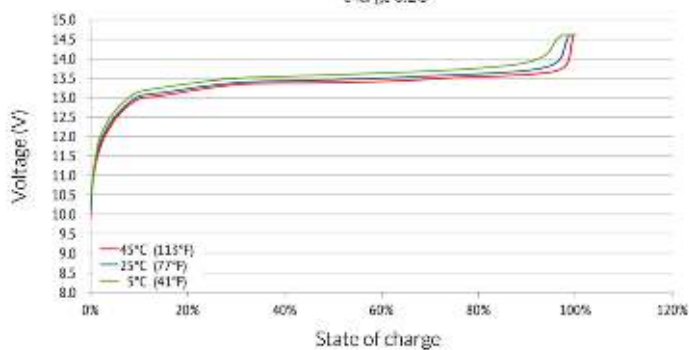

Charge voltage and state of charge (SOC)
Charge 0.2C @ 25°C (77°F)

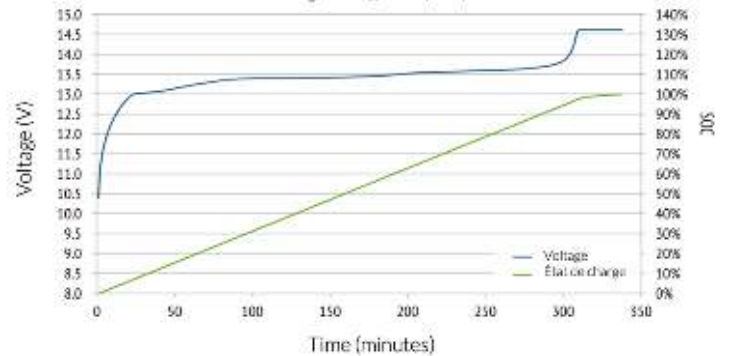

FICHE TECHNIQUE 3

