

# AVENTURA 12V 100Ah

Bluetooth

## Technical Specifications



### CHARGE SPECIFICATIONS

Recommended Charge Current	5 A - 50 A
Maximum Charge Current	100 A
Recommended Charge Voltage	14.2 V - 14.6 V (Bulk) 13.6 V (Float)
High Voltage Disconnect	16.7 V
High Voltage Reconnect	16.4 V

### TEMPERATURE SPECIFICATIONS

Charge Temperature	0° to 45 °C
Discharge Temperature	-20 to 60 °C
High Disconnect Temperature	60 °C
High Reconnect Temperature	55 °C
Storage Temperature	-10 à 50 °C



### ELECTRICAL SPECIFICATIONS

Voltage	12.8 volt
Capacity	100 Ah
Capacity @ 20A	300 min
Energy	1280 Wh
Auto-Discharge	<3% per Month
Maximum Unit in Series	4
Maximum Unit in Parallel	4

### DISCHARGE SPECIFICATIONS

Continuous Discharge Current	100 A
Peak Discharge Current	200 A (30s)
Disconnect Charge Current	300 A (1s)
Low Voltage Disconnect	10 V
Low Voltage Reconnect	12 V
Short Circuit Protection	yes

### NUMBER OF CYCLES ACCORDING TO THE DISCHARGE %

Discharge 30%	8200 cycles
Discharge 80%	4250 cycles
Discharge 100%	3000 cycles

Remaining Integrity (SOH) of 83% after 3560 cycles of discharges at 100% @ 1C


### MECHANICAL SPECIFICATIONS

Dimensions (LxWxD)	260 x 168 x 214 mm
Group 24	10,24 x 6,62 x 8,43 po
Weight	25 lbs
Terminal Type	M8
Ingress Protection Marking	IP65


### CERTIFICATIONS

Conception	4S1P
Certifications	CE   UL1973   RoHS
Shipping Classification	UN 3480   CLASS 9
Cell Type	SquareCell - LiFePO4 - 3.2V 100A Grade A+


Aventura (LiFePO4) vs Lead Acid  
At VARIOUS RATES OF DISCHARGE

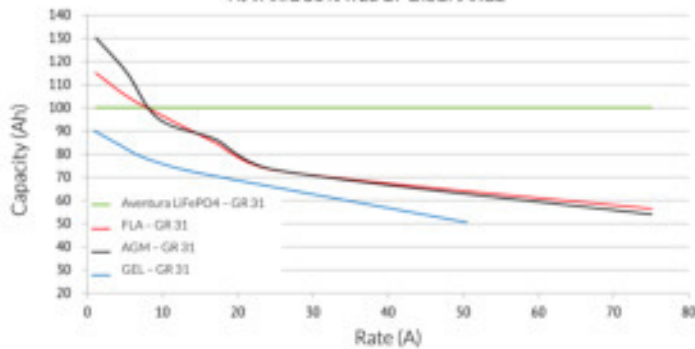


Cycle life vs depth of discharge (DOD)  
Discharge 0.5C / Charge 0.5 @ 25°C (77°F)

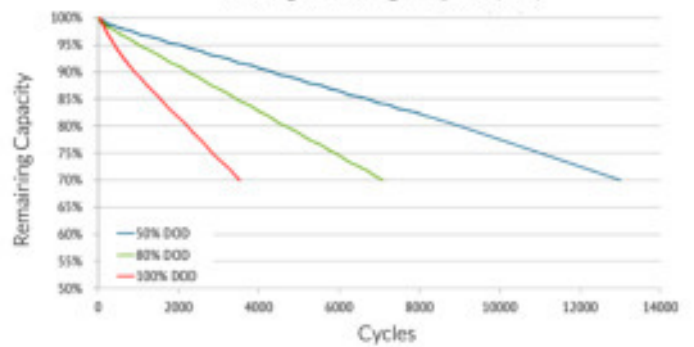


Discharge voltage characteristics at various RATES

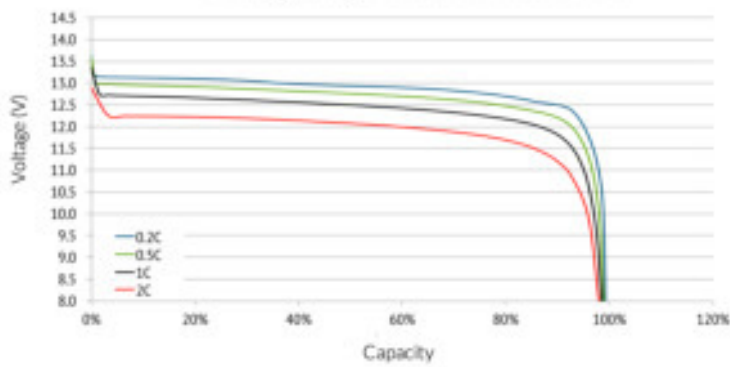

Discharge voltage characteristics at various TEMPERATURES

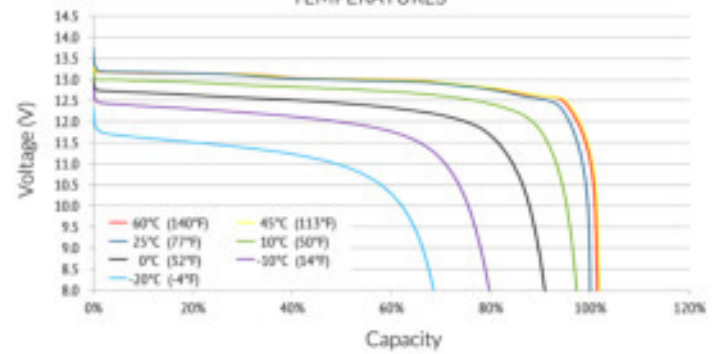

Charge voltage characteristics at various TEMPERATURE  
charge 0.2C

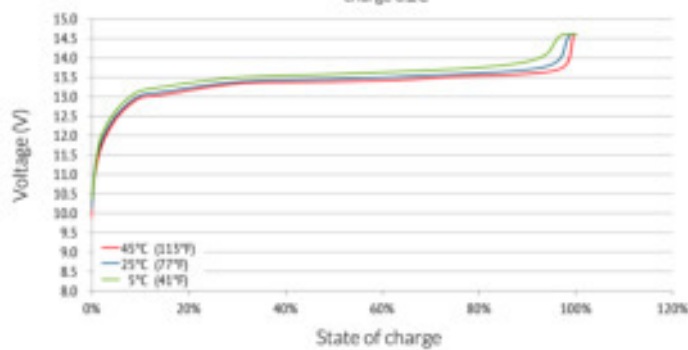

Charge voltage and state of charge (SOC)  
Charge 0.2C @ 25°C (77°F)

