

# TECHNICAL SHEET

## WALL MOUNT 25.6V 200AH



## ELECTRICAL SPECIFICATIONS

Voltage	25.6 volt
---------	-----------

Capacity	200 Ah
----------	--------

Capacity @ 20A	600 min
----------------	---------

Energy	5120 Wh
--------	---------

Auto-discharge	<1% per month
----------------	---------------

Maximum unit in series	2
------------------------	---

Maximum unit in parallel	16
--------------------------	----

## TEMPERATURE SPECIFICATIONS

Discharge temperature	From -20 to 65°C
-----------------------	------------------

Charging temperature	From 0 to 45°C
----------------------	----------------

## STORAGE SPECIFICATIONS

Storage temperature	From -20 to 45°C
---------------------	------------------

Storage voltage	From 26.2V to 26.6V
-----------------	---------------------

## CHARGE SPECIFICATIONS

Recommended Charge Current	80 A
----------------------------	------

Maximum Charge Current	150 A
------------------------	-------

Recommended Charge Voltage	28V (Bulk) 27.2 V (Float)
----------------------------	------------------------------

## COMMUNICATIONS SPECIFICATIONS

Bluetooth	No
-----------	----

Communication ports	2x RS485   2x Batt. Com.   1x CAN
---------------------	--------------------------------------

LCD screen	No
------------	----

Volthium CAN Hub Communication (VE.CAN)	Compatible
--	------------

## DISCHARGE SPECIFICATIONS

Continuous discharge current	150 A
------------------------------	-------

BMS - Discharge disconnect voltage	20.8 V
------------------------------------	--------

BMS - Discharge reconnection voltage	22.4 V
--------------------------------------	--------

Short circuit protection	Yes
--------------------------	-----

## NUMBER OF CYCLES ACCORDING TO THE AVERAGE DISCHARGE % OF USE


30% discharge	8200 < cycles
---------------	---------------

80% discharge	6000 < cycles
---------------	---------------

100% discharge	3500 < cycles
----------------	---------------

## MECHANICAL SPECIFICATIONS

Dimensions	365 X 400 X 235 mm 14.37 X 15.75 X 9.25 po
Group / format	5U
Weight	47.2kg / 104 lbs
Terminal Type	M8
Tightening torque on terminals	8~10nm / 6-8 ft/lb

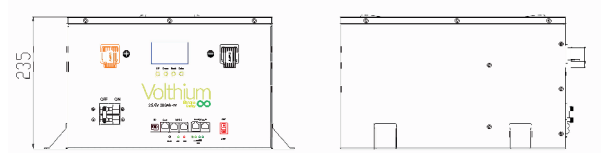

## CERTIFICATIONS & DESIGN

Design	8S2P
Certifications	Cells : (UL1973, UL1642, UL9540A, IEC62660), Breaker (UL1077 CSA C22.2)
Shipping Classification	UN 3480   CLASS 9
Cell type	SquareCell - LiFePO4 - 3.2V 100AH Grade A+

